


14. New pipework to be vitrified clay type and to be constructed to the following specifications. Systems that are resistant to a jetting pressure of 4000psi. Systems that minimise the number of joints in the system, by using 3 metre pipe length. Systems that do not have lip seal joints, hence preventing root ingress.



Compaction should be in 150mm layers with 4 passes of a smooth wheeled roller max weight of 1000kg/m width WITHOUT VIBRATION.

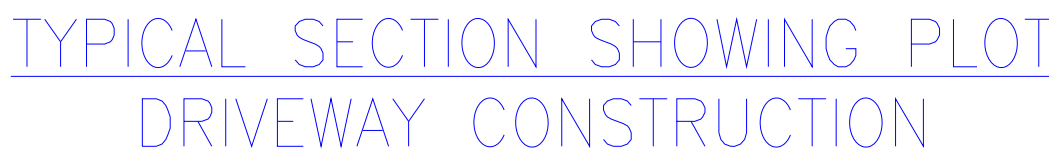

BROWN	CMW	CHRIS	EG	QAD	EG	470702-11F1
-------	-----	-------	----	-----	----	-------------