


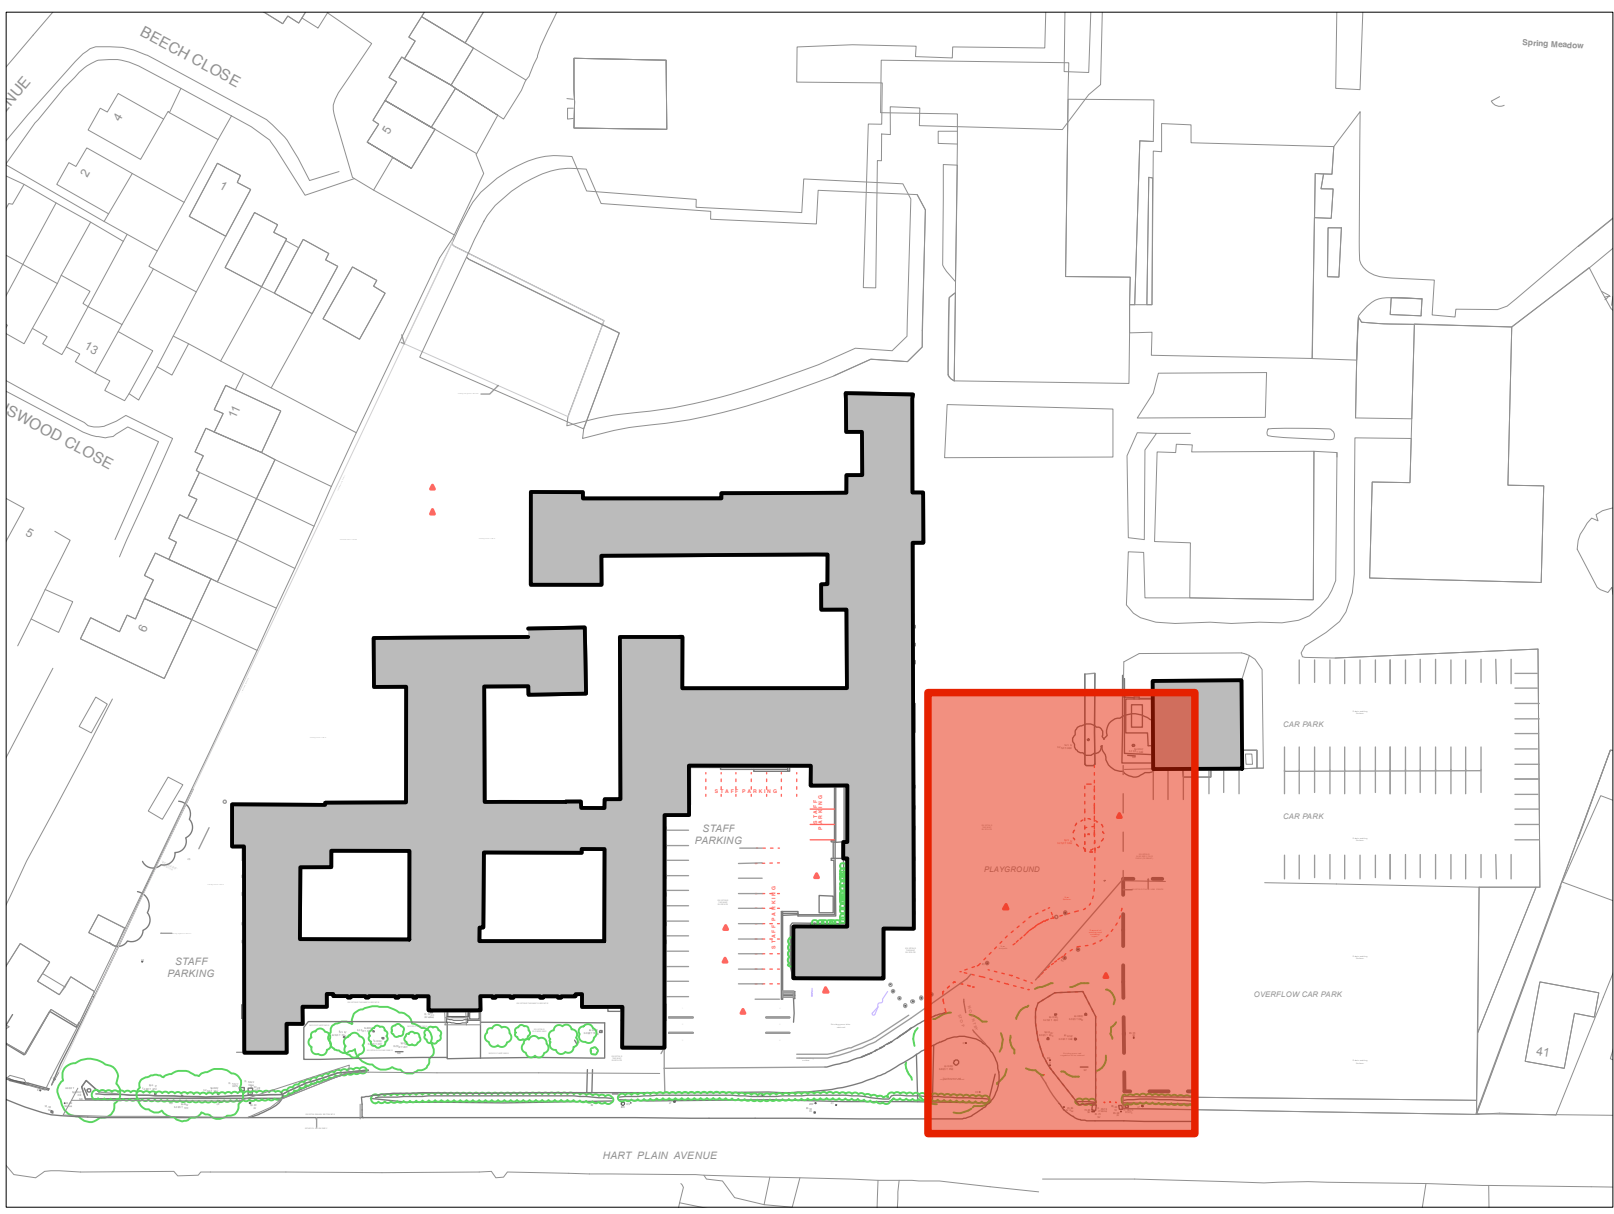

KEY PLAN
NTS


KEY

- Demolition/removal of existing item.
- New Concrete Drop Kerb.
- Remove existing bollards and clear from site.
- Perimeter fence Type A**
Proposed 2.4m height anti-climb, open-welded mesh fencing.
- Perimeter fence Type B**
Proposed 1.2m height anti-climb open-welded mesh fencing.


GATE ACCESS KEY

- EG-08** **EXTERNAL GATE 8 - VEHICULAR FRONT ENTRANCE**
Item: Provide and install new double vehicular gate including all other components.
Access control: Manual access. Mechanical lock.
- EG-09** **EXTERNAL GATE 9 - PEDESTRIAN SITE FRONT ENTRANCE**
Item: Provide and install new double pedestrian gate including all other components.
Access control: Manual access. Mechanical lock.
- EG-10** **EXTERNAL GATE 10 - PEDESTRIAN SCHOOL SITE ENTRANCE**
Item: Provide and install new double pedestrian gate including all other components.
Access control: Manual access. Mechanical lock.
- EG-11** **EXTERNAL GATE 11 - SCHOOL PLAYGROUND ENTRANCE**
Item: Provide and install new double pedestrian gate (min 2x1200mm width) including all other components. Allow for hold-back and posts.
Access control: Pedestrian access via time-controlled automation. Digital lock access. Maglock fail-safe to open linked to building fire alarm.
- EG-12** **EXTERNAL GATE 12 - VEHICULAR NURSERY ENTRANCE**
Item: Provide and install new double vehicular gate including all other components.
Access control: Manual. Mechanical Lock.

PLAYGROUND

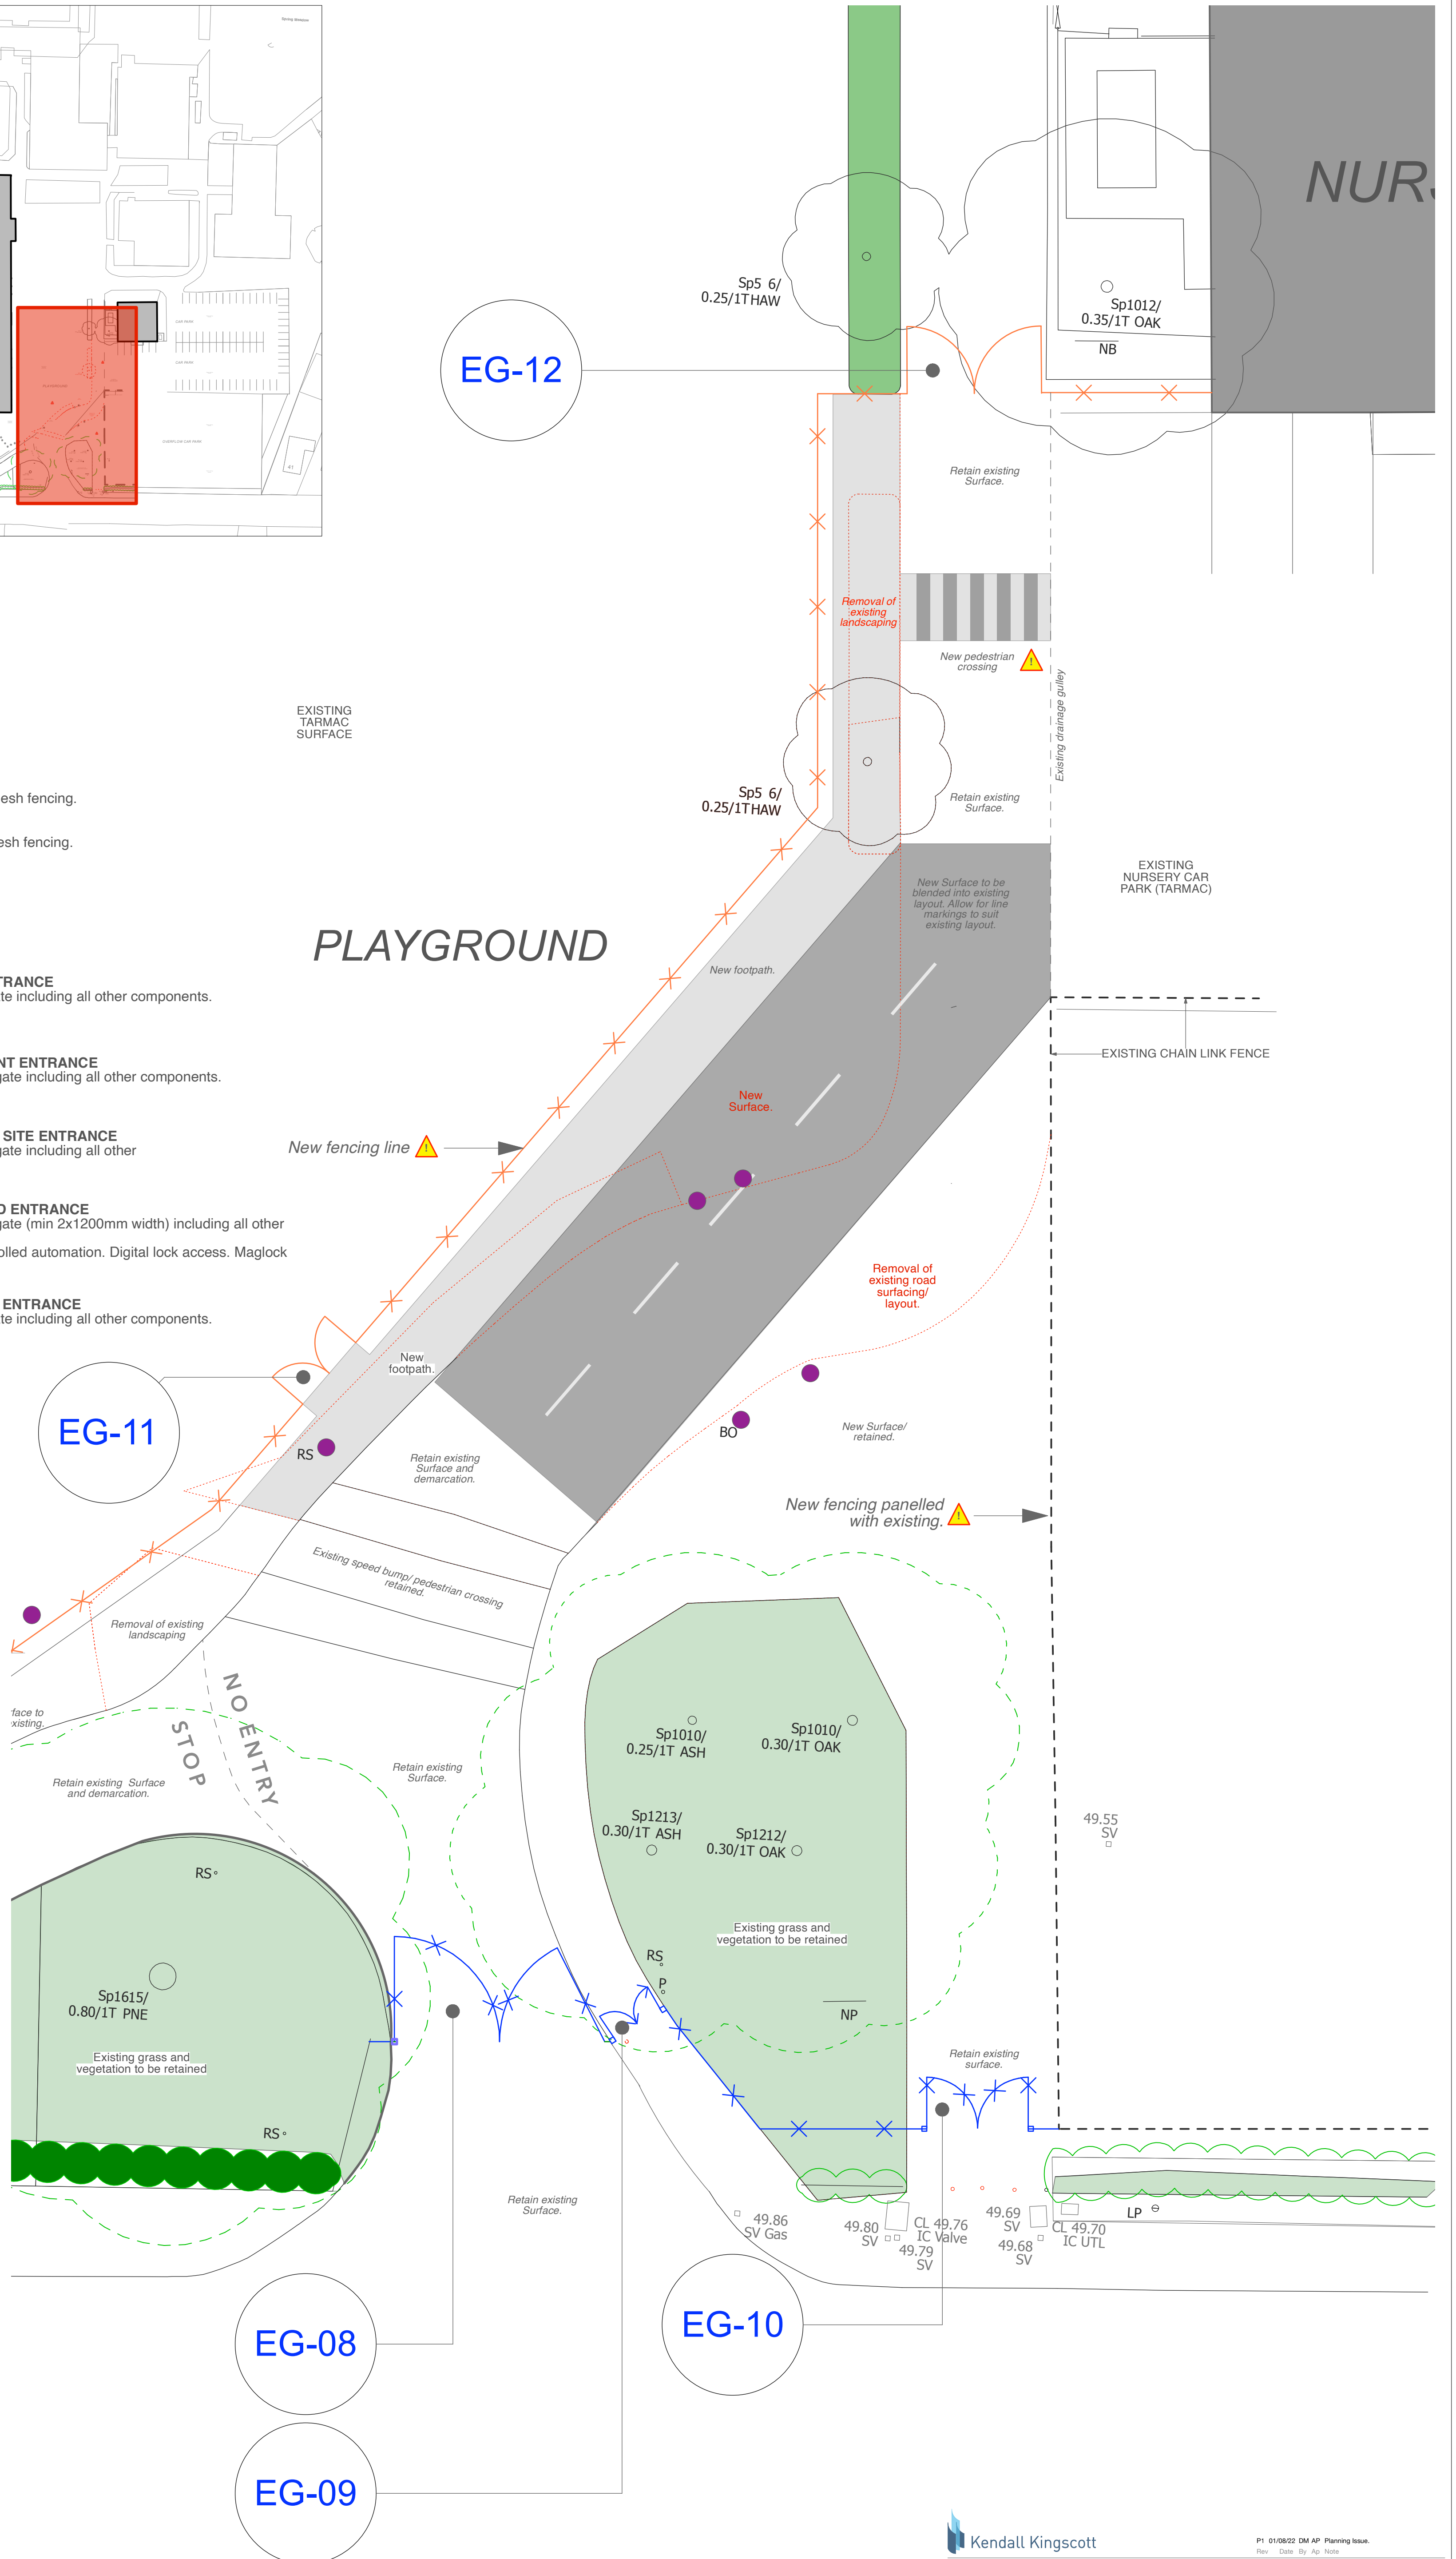

PROPOSED PLAN (EXTRACT D)

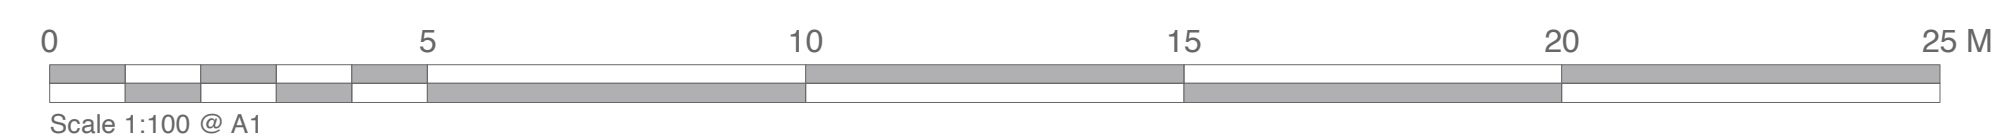

Chartered Architects
Chartered Building Surveyors
Interior Designers
CDM Services

Client: The Coplain School
3 GP Centre, Yorman Road, Ringwood, Hampshire, BH24 9FF
+44 (0)1425 472 833
www.kendallkingscott.co.uk

Scale: 1:100
Paper Size: A1
Drawing Number: 220493

P1 01/05/22 DM AP Planning Issue.

Rev Date By Ap Note

Proposed Plan (Extract D)

Project Number Drawing Number

220493-0505 P1

Date: 04/07/22

Drawn: AP

Checked: BS

Status: PLANNING

Check all dimensions and levels on site