
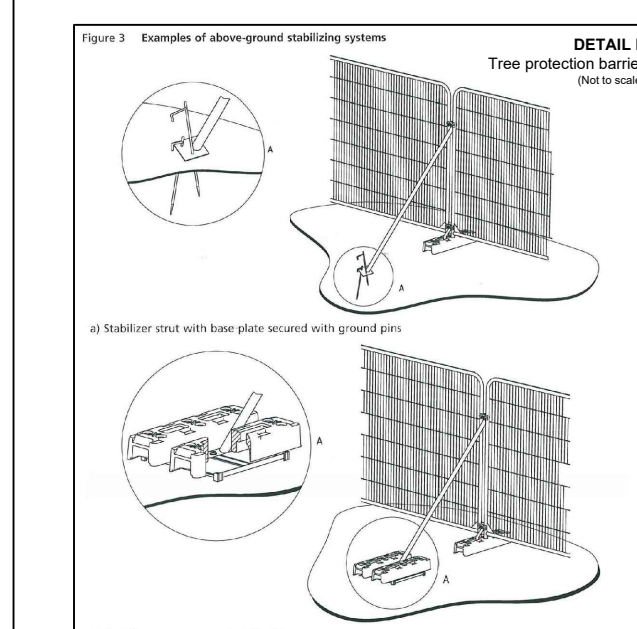
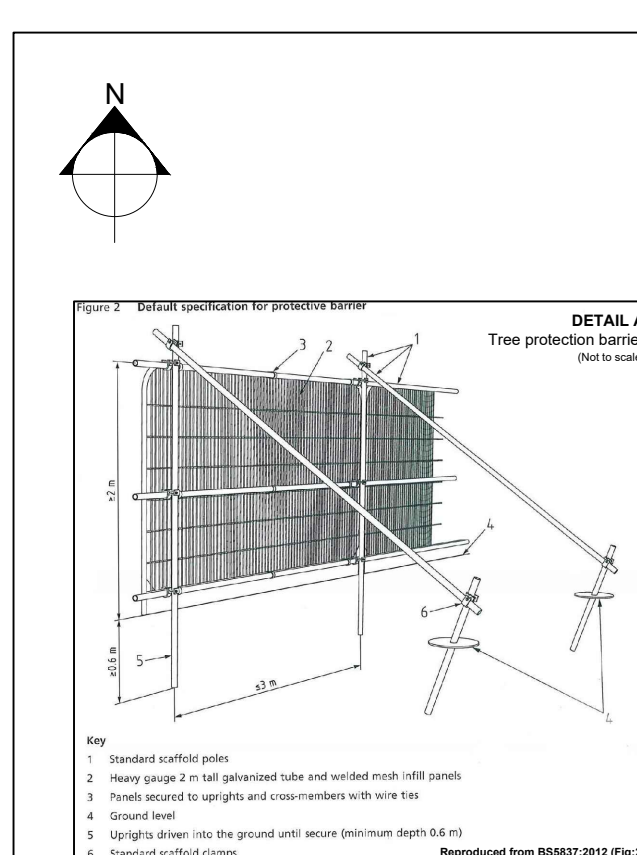


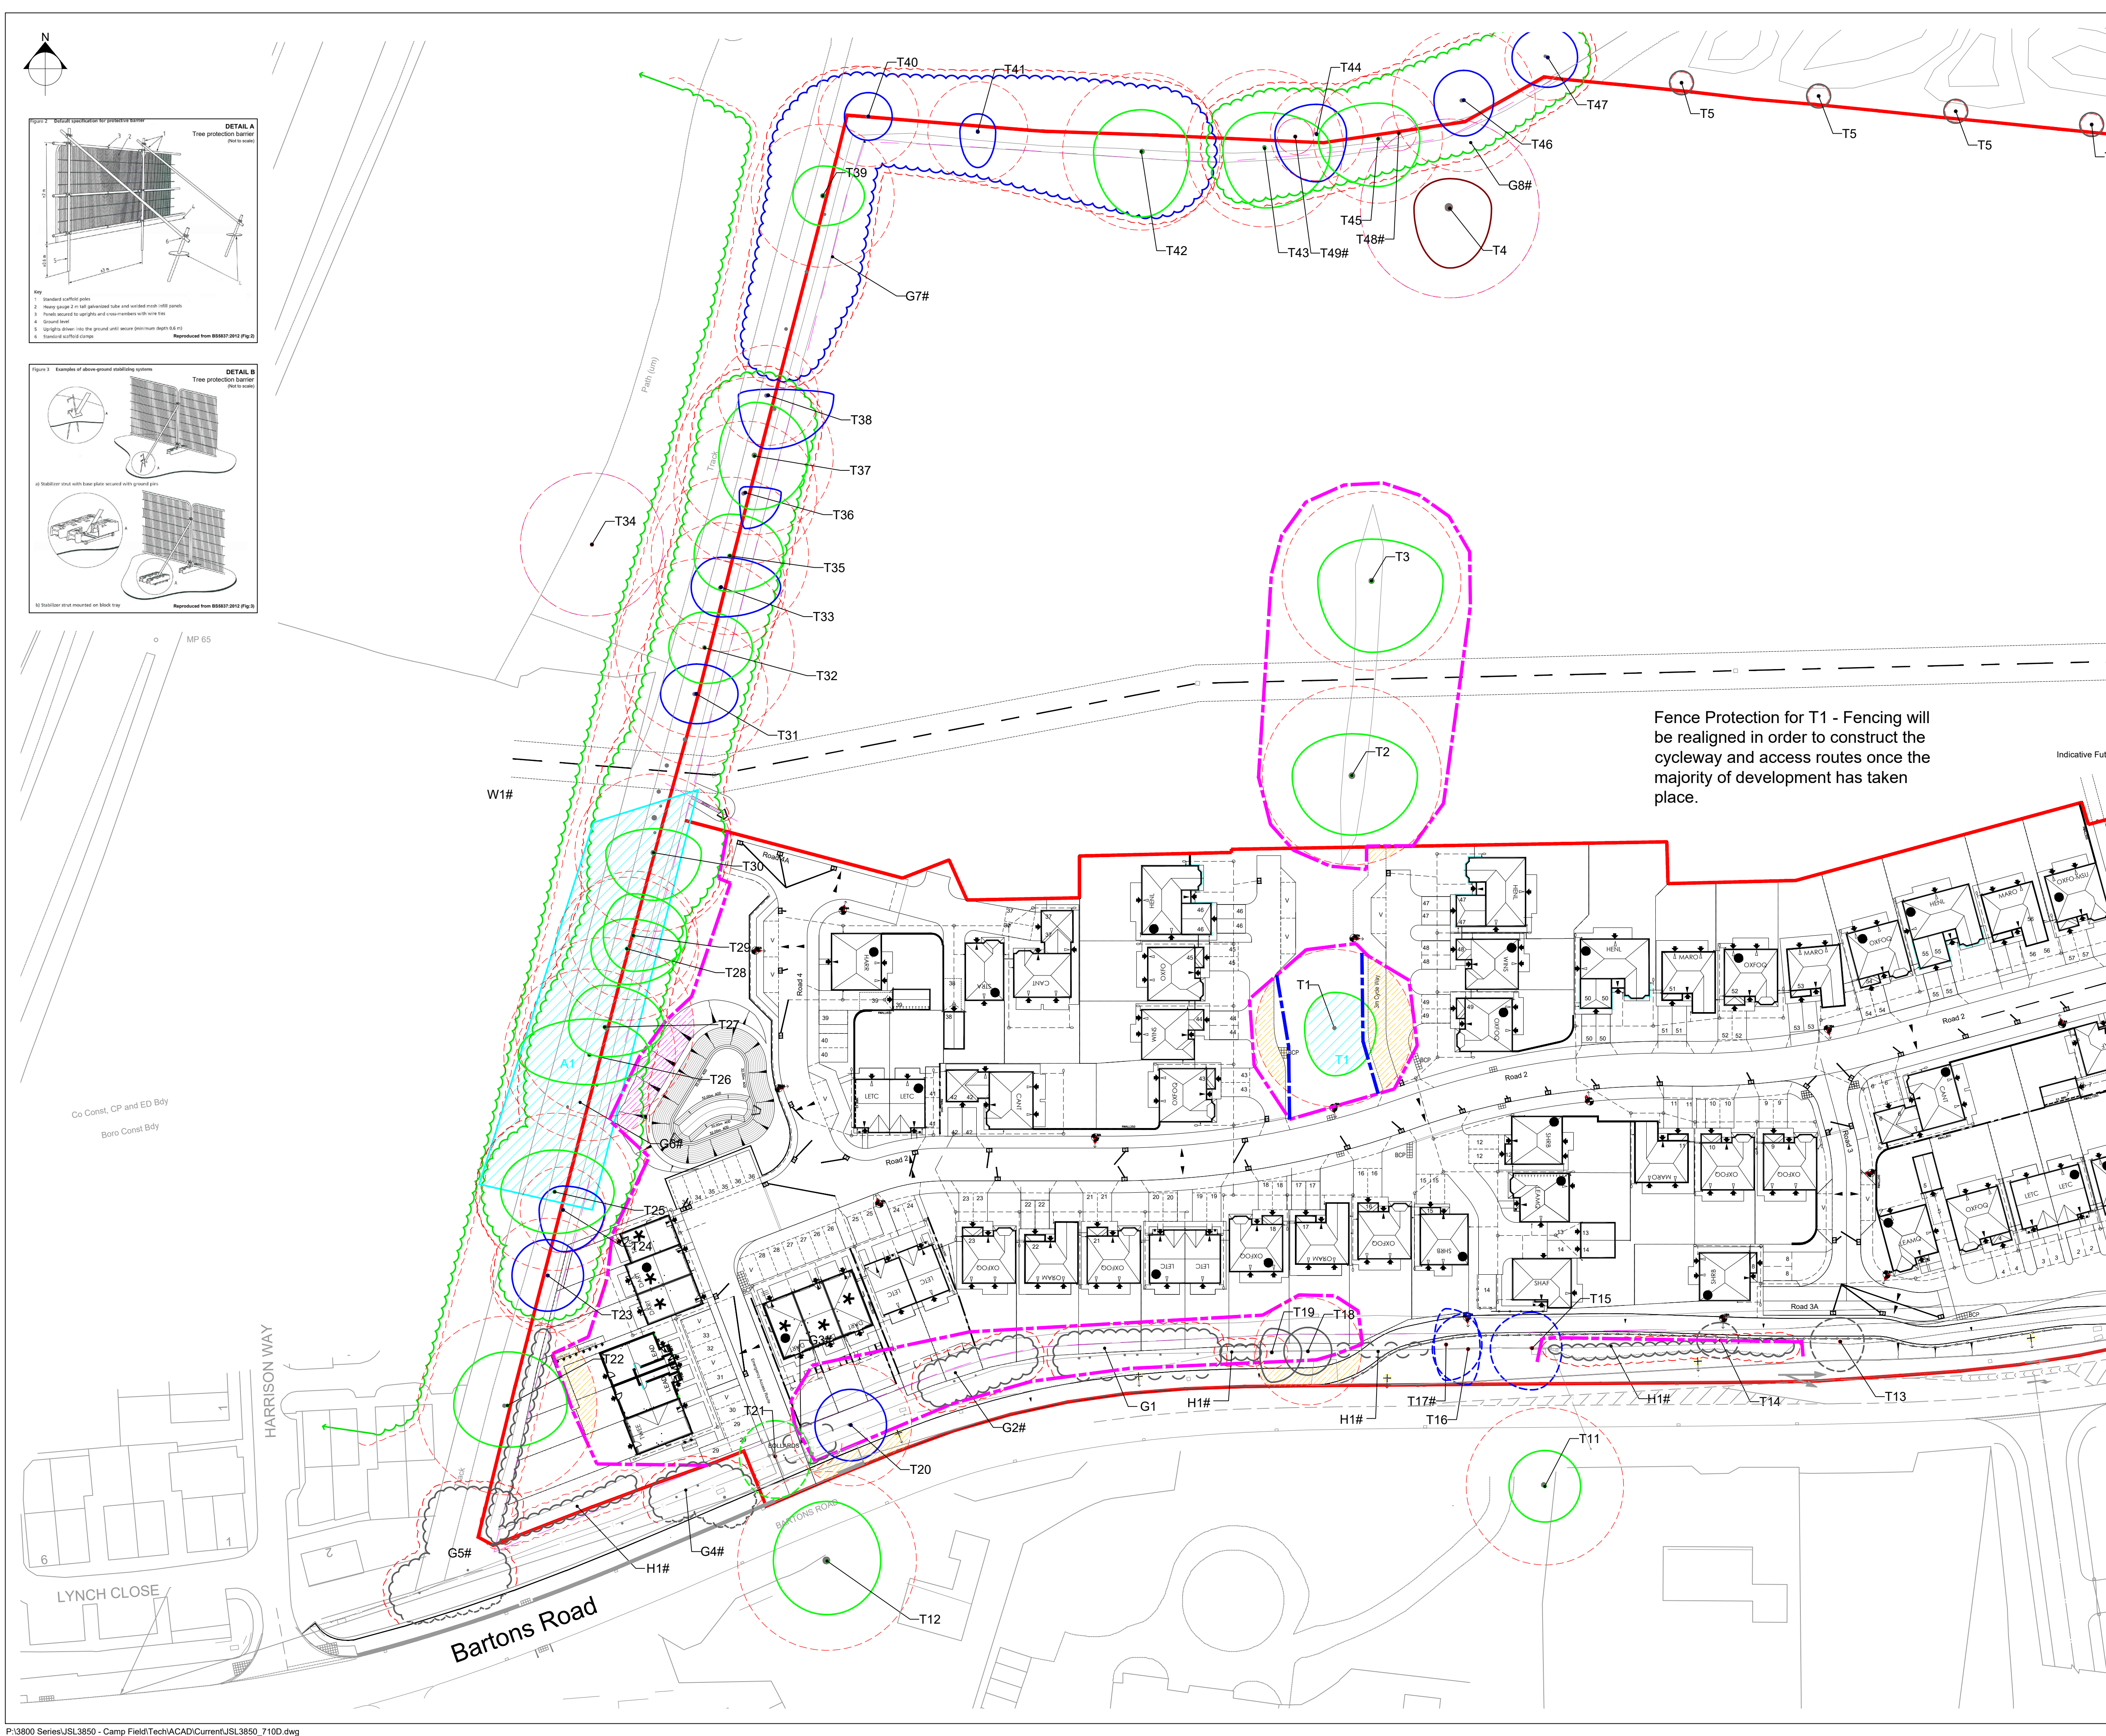

© 2020 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.

2. If received electronically it is the recipient's responsibility to print to correct scale. Only written dimensions should be used.

3. Where applicable Ordnance Survey (c) Crown Copyright 2020

All rights reserved. Licence number 0100031673

Key

- Site boundary.
- Tree with numbered reference. Canopy spread and BS5837:2012 tree quality category as shown below.
- Tree location estimated with numbered reference. Canopy spread and BS5837:2012 tree quality category.
- Tree off-site with numbered reference. Canopy spread and BS5837:2012 tree quality category.
- Vegetation group with numbered reference. Canopy extent and BS5837:2012 tree quality category as shown below.
- Hedge with numbered reference. Width and BS5837:2012 tree quality category as shown below.

BS 5837:2012 Tree Quality Categories - Table 1

- Category A - High quality
- Category B - Moderate quality
- Category C - Low quality
- Category U - Unsuitable for retention

- Tree protected by Tree Preservation Order No.0878/1976, Havant BC. Bracketed number reference relates to the TPO Schedule.
- Root protection area (RPA) Calculated in accordance with Section 4.6 - BS5837:2012
- Above ground construction requiring "No-dig" design principles in accordance with "AA Guidance Note 12 Cellular Confinement Systems Near Trees".
- Excavation to be completed by hand, any required root pruning to be in accordance with BS 3998. Pruning of roots over 25mm to be monitored by arboriculturalist, with ongoing monitoring of trees condition by an arboriculturalist being recommended.
- "No-dig" Works to be completed by hand or by using plant loaded outside trees RPAs. If this is not possible, ground protection must be used to facilitate access.
- Tree to be removed with numbered reference. Canopy spread and BS5837:2012 tree quality category.
- Vegetation group or hedge to be removed with numbered reference. Canopy spread and BS5837:2012 tree quality category.
- Phase 1 - Temporary protective fencing in accordance with Section 6.2 - BS5837:2012. See inset details for example barriers.
- Phase 2 - Temporary protective fencing in accordance with Section 6.2 - BS5837:2012. See inset details for example barriers.

NOTES

- Refer to RPS Tree Survey Report & Schedule for further details.
- Survey based on a visual inspection from the ground and is not intended as a full arboricultural inspection.
- Plan produced in accordance with recommendations set out in BS 5837:2012 - "Trees in Relation to design, demolition and construction".
- Due to the legal protection afforded to breeding birds vegetation removal should not take place during the bird nesting period, generally, although not restricted to, March - August inclusive.
- Survey based upon topographic survey produced by Cable Surveys Ltd in November 2020.
- Protective vehicular emergency access routes to be maintained at all times.

Scale Bar

0m 25m 50m

D	Upvised layout	JMB	DC	25.08.22
C	Upvised layout	AB	DC	15.02.22
B	TPF updated to protect T2 & T3	DC	DC	19.11.21
A	Upvised to Layout C13	MW	DC	11.11.21
Rev	Description	By	CB	Date

MAKING COMPLEX EASY

Lakesbury House, Hittingbury Road, Chandlers Ford, Hampshire SO53 5SS
T: 02380 810 440 E: rpsso@rpsgroup.com

Client **Redrow Homes**

Project **Camp Field Havant**

Title **Tree Protection and Removal Plan**
Sheet 1 of 2

Status

For Planning

Job Ref

JSL3850

RPS Drawing / Figure Number

710

Drawn By

AB

Scale @ A1

1:500

PM/Checked by

DC

Date Created

Mar 2021

Rev

D

rpsgroup.com