Planting Schedule

Trees

Species Name	Girth	Height	Density	Specification	No.
Amelanchier arborea 'Robin Hill'		60-80cm	Counted	C	1 -
Hamamelis japonica 'Arborea'		60-80cm	Counted	C	6 -
Crataegus monogyna		100-125cm	1Ctr	Transplant	26 -
Prunus cerasifera 'Nigra'	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	13 -
Sorbus aria	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	6 -
Crataegus prunifolia	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	4 -
Prunus 'Tai-haku'	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	9 -
Acer campestre 'William Caldwell'	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	7 -
Malus sylvestris	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	8 -
Acer campestre	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	1 -
Carpinus betulus	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	11 -
Quercus robur	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	2 -
Sorbus aria	12-14cm	400-450cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	6 -
Tilia cordata 'Green Spire'	12-14cm	400-450cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	3 -
Tilia cordata	12-14cm	400-450cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	7 -
Acer campestre 'William Caldwell'	12-14cm	400-450cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	5 -

Shrubs

Species Name	Height	Pot Size	Specification	Density	No.
Abelia grandiflora 'Kaleidoscope'	30-40cm	5L	Bushy	4/m²	226 -
Aucuba japonica 'Rozannie'	40-60cm	5-7.5L	Bushy	4/m²	186 -
Berberis thun. f. atropurpurea	40-60cm	5L	Branched	4/m²	68 -
Camellia williamsii 'China Clay'	40-60cm	5-7.5L	Bushy	4/m²	21 -
Carpinus betulus	60-80cm	5L	Branched	1Ctr	26 -
Cornus sanguinea	40-60cm	3L	Bushy :C	1Ctr	18 -
Corylus avellana	60-80cm	5L	Branched	1Ctr	13 -
Corylus avellana	40-60cm	2L	Bushy :C	1Ctr	18 -
Cotoneaster x suecicus 'Coral Beauty'	30-40cm	5L	Bushy	4/m²	140 -
Euonymus fortunei 'Emerald Cushion'	30-40cm	5-7.5L	Bushy	4/m²	427 -
Fushia 'Margret'	30-40cm	3L	Bushy	4/m²	47 -
Hypericum 'Hidcote'	40-60cm	5-7.5L	Bushy	4/m²	255 -
Hypericum calycinum	30-40cm	5L	Bushy	4/m²	10 -
Juniperus virginiana 'Grey Owl'	40-60cm	5-7.5L	Bushy	4/m²	45 -
Leucothoe walteri	40-60cm	5L-7.5L	Bushy	4/m²	138 -
Ligustrum vulgare	40-60cm	3L	Bushy :C	1Ctr	57 -
Lonicera pileata 'Moss Green'	40-60cm	5-7.5L	Bushy	4/m²	88 -
Myrtus communis subsp. tarentina	30-40cm	5L	Bushy	4/m²	51 -
Nandina domestica 'Firepower'	40-60cm	5-7.5L	Bushy	4/m²	151 -
Philadelphus 'Belle Etoile'	40-60cm	5-7.5L	Bushy	4/m²	127 -
Photinia fraseri 'Little red robin'	40-60cm	5-7.5L	Bushy	4/m²	166 -
Pittosporum tenuifol. 'Silver Queen'	40-60cm	5-7.5L	Bushy	4/m²	15 -
Pittosporum tenuifolium 'Golf Ball'	40-60cm	5-7.5L	Bushy	4/m²	288 -
Potentilla fruticosa 'Abbotswood White'	30-40cm	5L	Bushy	4/m²	224 -
Pyracantha 'Red Column'	40-60cm	5L	Branched	4/m²	8 -
Pyracantha 'Red Cushion'	40-60cm	5L	Branched	4/m²	11 -
Rosa 'Ballerina'	40-60cm	5-7.5L	Bushy	4/m²	128 -
Rosa canina	60-80cm	5L	Branched	1Ctr	8 -
Salvia officinalis 'Berggarten'	30-40cm	5L	Bushy	6/m²	296 -
Sambucus nigra	60-80cm	5L	Bushy	1Ctr	4 -
Sarcococca confusa	40-60cm	5-7.5L	Bushy	4/m²	288 -
Skimmia japonica reevesiana	40-60cm	5-7.5L	Bushy	4/m²	332 -
Spiraea japonica 'Little Princess'	40-60cm	5-7.5L	Bushy	4/m²	91 -
Viburnum bodnantense 'Dawn'	80-100cm	15-20L	Branched :C	Counted	3 -
Viburnum opulus	60-80cm	5L	Branched	1Ctr	8 -
Viburnum opulus 'Compactum'	40-60cm	5L	Branched	4/m²	18 -
Viburnum tinus 'Eve Price'	40-60cm	5L	Branched	4/m²	113 -

Hedge

Species Name	Height	Pot Size	Specification	Density	No.
Carpinus betulus	60-80cm	5L	Branched	0.5Ctr Double Staggered at 0.4m offset	1279 -
Ilex crenata	40-60cm	5L	Bushy	0.5Ctr Double Staggered at 0.3m offset	234 -
Prunus lusitanica 'Myrtifolia'	40-60cm	5L	Bushy	0.5Ctr Double Staggered at 0.4m offset	662 -

Climbers

Species Name	Height	Pot Size	Specification	Density	No.
Hydrangea petiolaris	100-150cm	10L	Several Shoots :5 brks :3xCane	Counted	6 -
Jasminum officinale grandiflora	100-150cm	10L	Several Shoots :5 brks :3xCane	Counted	10 -
Rosa 'Emily Grey'	100-150cm	10L	Several Shoots :5 brks :3xCane	Counted	3 -

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTE: DO NOT SCALE FROM DRAWING


Legend

- Existing trees to be retained and protected during construction
- Proposed tree planting within soft landscape. See detail on sheet 4
- Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties. Irrigation tubing to root system of *Amelanchier, Laurus* and *Osmanthus* specimens as required
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed *Carpinus* (hornbeam) hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height
- Proposed mixed native hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height and 1.8m height adjacent to site boundaries
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed decorative mix shrub planting to be planted in groups of 5-7no. of each species and as above
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed grassland areas, to be seeded with EM4 grass seed mix as supplied by Emorsgate and sown at 5 grams per msq, or similar and approved
- Tree root barrier. ReRoot 1000 from GreenBlue Urban or similar
- Proposed narrow areas of angular shippings for top dressing. Laid over a weed proof membrane.
- Proposed area to be planted with a bulb mix of fritilleria, galanthus, narcissus, allium
- Cycle route signage bollard indicating shared footpath and cycle route
- Cut lines

Planting Schedule on Sheet 2

Ecology Mitigation and Enhancement

- Hedgehog holes
- Bat Box 1FF or similar and approved.
- 2F bat boxes on trees
- 17A swift box
- Woodstone swift nest box (or similar)
- Schwegler 17A swift triple chamber nest box (or similar)
- Vivara pro woodstone house sparrow nest box (or similar)

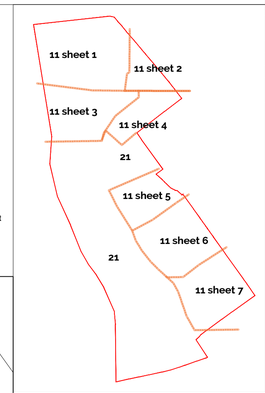

Rev	Date	Details	Drawn
H	28.04.22	Tree amendments	RK
G	21.12.21	Eco Comments (ACD)	JH
F	17.12.21	Eco mitigation updated	JH
E	02.06.21	Eco mitigation updated	JH
D	21.8.18	Comments	LS
C	7.8.17	Revised planting	LS
B	4.8.17	Updated Layout	LS
A	7.7.17	Updated Layout	LS

ACD ENVIRONMENTAL
HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane, Malmesbury, SN16 0ES
Tel: 01666 825646

Courtyard House, Mill Lane, Godalming, GU7 1EY
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 9SX
Tel: 02382 026300

9 Brownlow Road, Cambridge, CB4 3NG
Tel: 07825 868654

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

Bellway

scheme: Horndean Road Emsworth
client: Bellway Wessex
drawing: Landscape Proposals
date: March 2017
scale: 1:200@A1
drawing no: BELL21129 11E - sheet 2
drawn: LS checked: AE

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted: 2011. Copyright of this plan remains with ACD until all fees have been paid in full.