


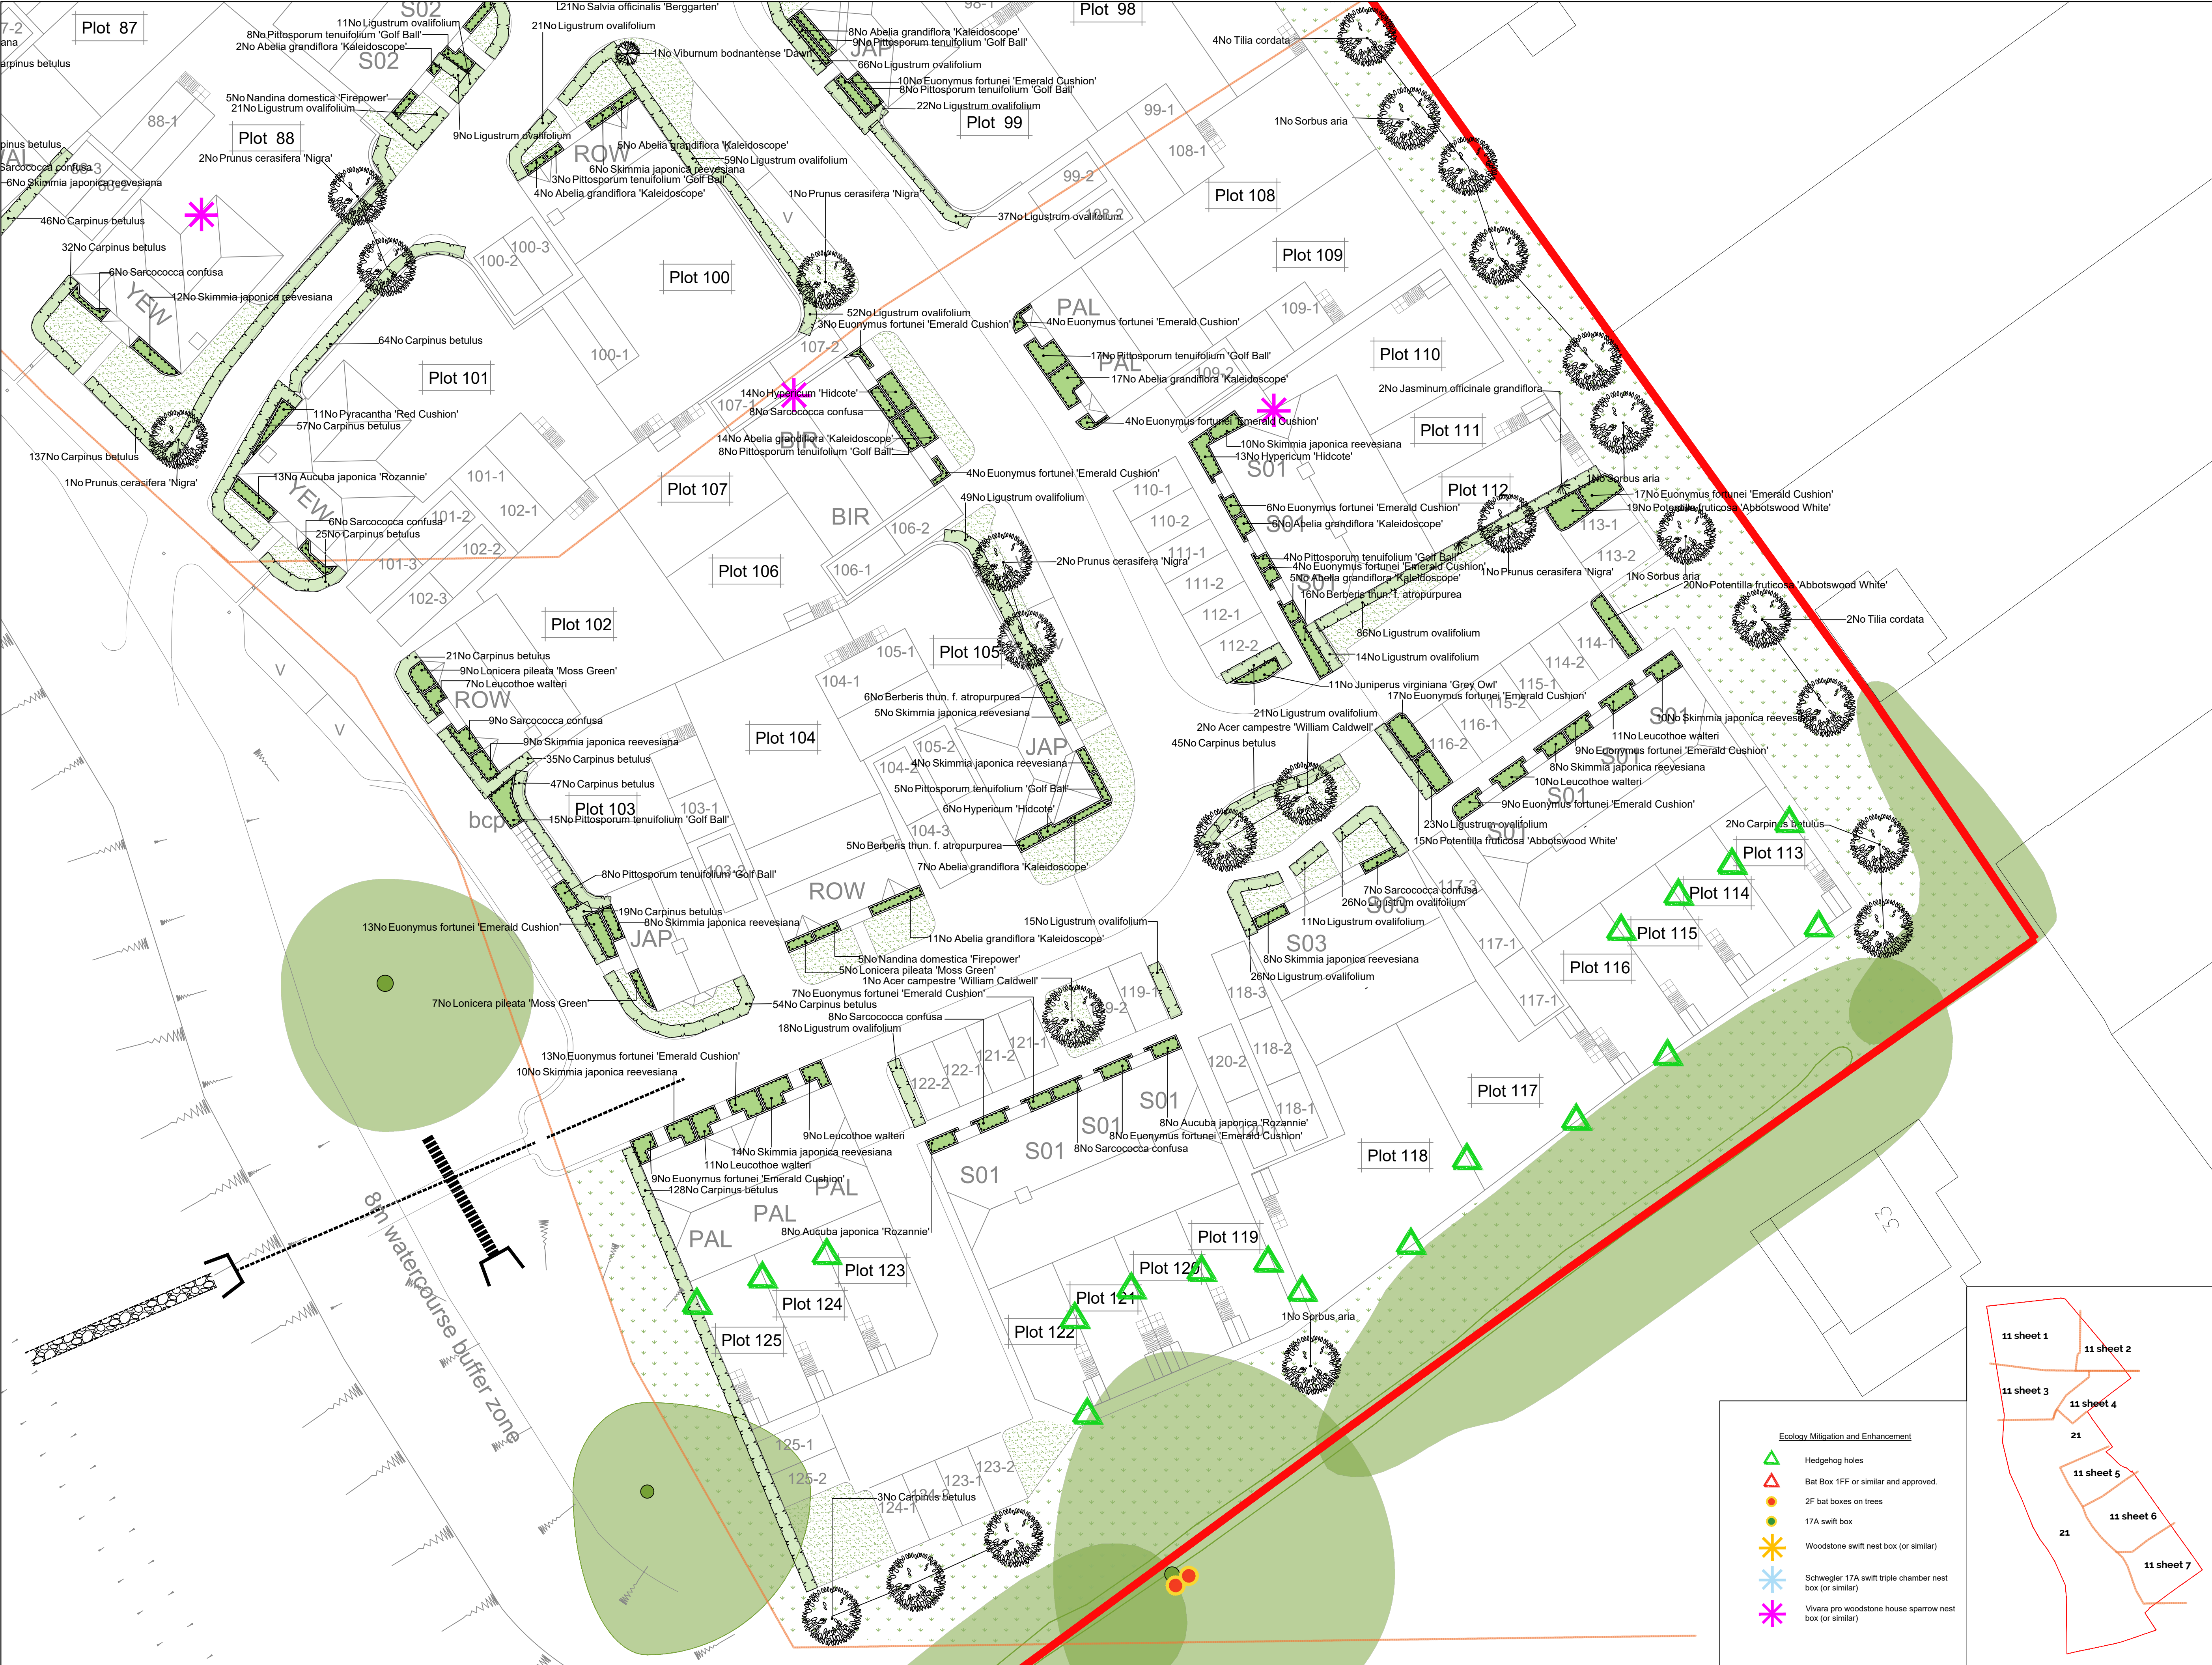

**SPECIFICATION**  
All works generally, to comply with the written Soft Landscape Specification.

**NOTE: DO NOT SCALE FROM DRAWING**

**Legend**

- Existing trees to be retained and protected during construction
- Proposed tree planting within soft landscape. See detail on sheet 4
- Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties. Irrigation tubing to root system of *Amelanchier*, *Laurus* and *Osmanthus* specimens as required
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed *Carpinus* (hombbeam) hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height
- Proposed mixed native hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height and 1.5m height adjacent to site boundaries
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed decorative mix shrub planting to be planted in groups of 5-7no. of each species and as above
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed grassland areas, to be seeded with EM grass seed mix as supplied by Emorsgate and sown at 5 grams per msq, or similar and approved
- Tree root barrier, ReRoot 1000 from GreenBlue Urban or similar
- Proposed narrow areas of angular shippings for top dressing. Laid over a weed proof membrane.
- Proposed area to be planted with a bulb mix of fritillaria, galanthus, narcissus, allium
- Cycle route signage bollard indicating shared footpath and cycle route
- Cut lines

Planting Schedule on Sheet 2

North Arrow

Scale Bar

|     |          |                        |       |
|-----|----------|------------------------|-------|
| H   | 28.04.22 | Tree amendments        | RK    |
| G   | 21.12.21 | Eco Comments (ACD)     | JH    |
| F   | 17.12.21 | Eco mitigation updated | JH    |
| E   | 02.06.21 | Eco mitigation updated | JH    |
| D   | 21.8.18  | Comments               | LS    |
| C   | 7.8.17   | Revised planting       | LS    |
| B   | 4.8.17   | Updated Layout         | LS    |
| A   | 7.7.17   | Updated Layout         | LS    |
| Rev | Date     | Details                | Drawn |

**ACD ENVIRONMENTAL**

HEAD OFFICE  
Rodbourne Rail Business Centre, Grange Lane,  
Malmesbury, SN16 0ES  
Tel: 01666 825646

Courtyard House, Mill Lane, Codrington, GU7 1EY  
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 9SX  
Tel: 02382 026300

9 Brownlow Road, Cambridge, CB4 3NG  
Tel: 07825 868654

email: mail@acdenv.co.uk  
www.acdenvironmental.co.uk

**Bellway**

scheme: Horndean Road Emsworth  
client: Bellway Wessex  
drawing: Landscape Proposals  
date: March 2017  
scale: 1:200@A1  
drawing no: BELL21129 11E - sheet 7  
drawn: LS checked: AE

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2011. Copyright of this plan remains with ACD until all fees have been paid in full.

- Ecology Mitigation and Enhancement**
- Hedgehog holes
  - Bat Box 1FF or similar and approved.
  - 2F bat boxes on trees
  - 17A swift box
  - Woodstone swift nest box (or similar)
  - Schwegler 17A swift triple chamber nest box (or similar)
  - Vivara pro woodstone house sparrow nest box (or similar)

