


The new extraction/ventilation system has been installed as the following:



1 meter long
Silencer

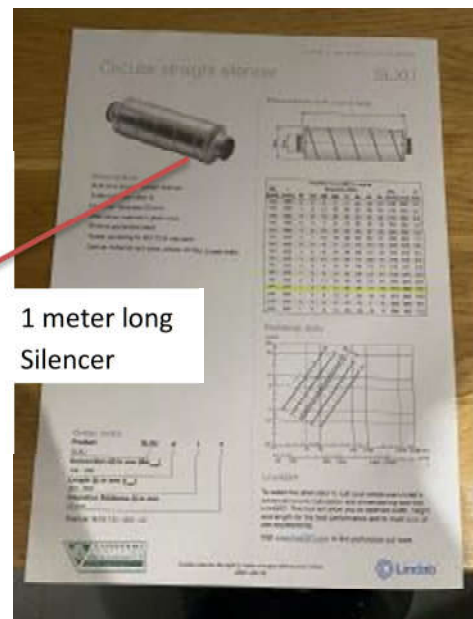


External front
vent



Rubber mounting behind for
supports on wall to prevent
noise from vibration



New controller fitted with transformer to regulate fan speed

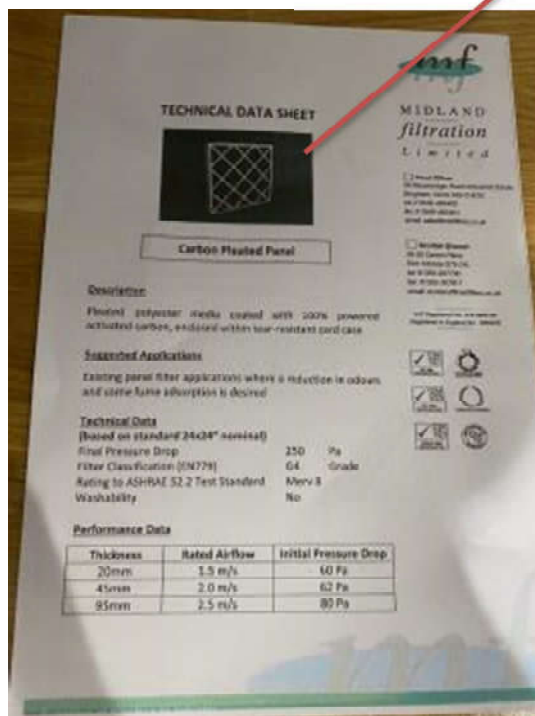

Boxed and sound proofed fan with access hatch for changing carbon filter



In regards to the following condition:

01/65327

Condition 2 - Kept in full working order/maintained and all documentary evidence to be kept and made available for inspection by the LA. (Summarised)

01/65327/03

Condition 2 –within 28 days, the equipment is to be Installed and kept in full working order (Summarised)

We believe that these do not need a variation as our client will keep the maintenance history for the ventilation system for inspection by HBC when needed.

We would like to apply for a variation of conditions 2, 4 and 6 of planning permission 94/54410/4 and hope that these works meet your approval.

All the new ventilation/extraction works can be seen from inside the café for inspection on all days except for Mondays when the café is closed.

We look forward to hearing from you at your earliest convenience.

Yours sincerely,

Hazel Butler

Hazel Butler

On behalf of Hazel Butler Architects.

Hazel Butler Architects

24 Nightingale Close, Rowlands Castle, Hampshire, PO9 6EU – T: 0750 300 2520
E:Architect.HazelButler@gmail.com