



RIDGE & SLATE ROOF
ON TWELVE BREATHABLE FELT
& BATTEN,

ROOF 6" x 2" RAFTERS
4" x 2" CEILING QUARTERS

ALL ELECTRICS TO RUN OFF
ARMoured CABLE TO BE CERTIFIED
BY ELECTRICIAN ON INSTALLATION
INSULATION TO ROOF SPACE
CELOTEX TO WALLS & FLOOR
O.P.M. TO FLOOR, CELOTEX, PLUS
FLOATING 1/4" FLOOR.

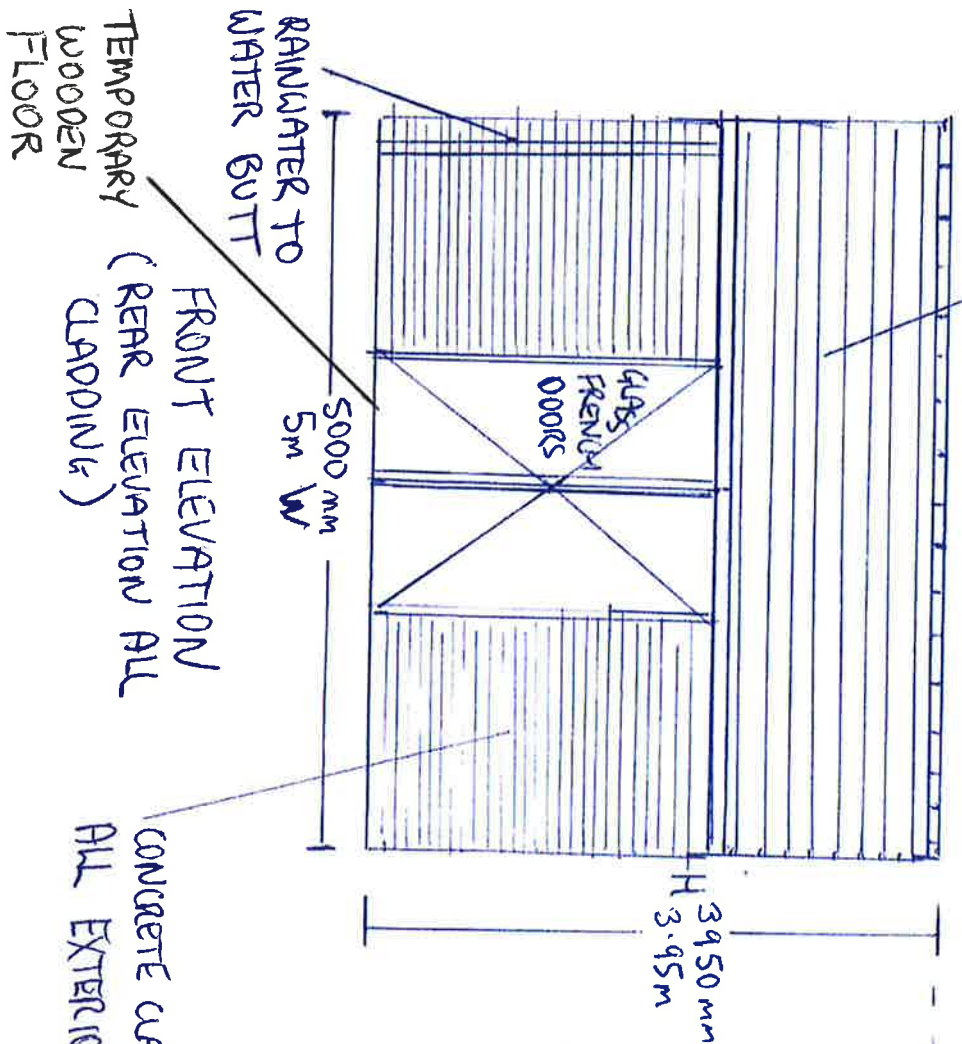

CONCRETE CAVING TO
ALL EXTERIOR ON BREATHABLE MEMBRANE

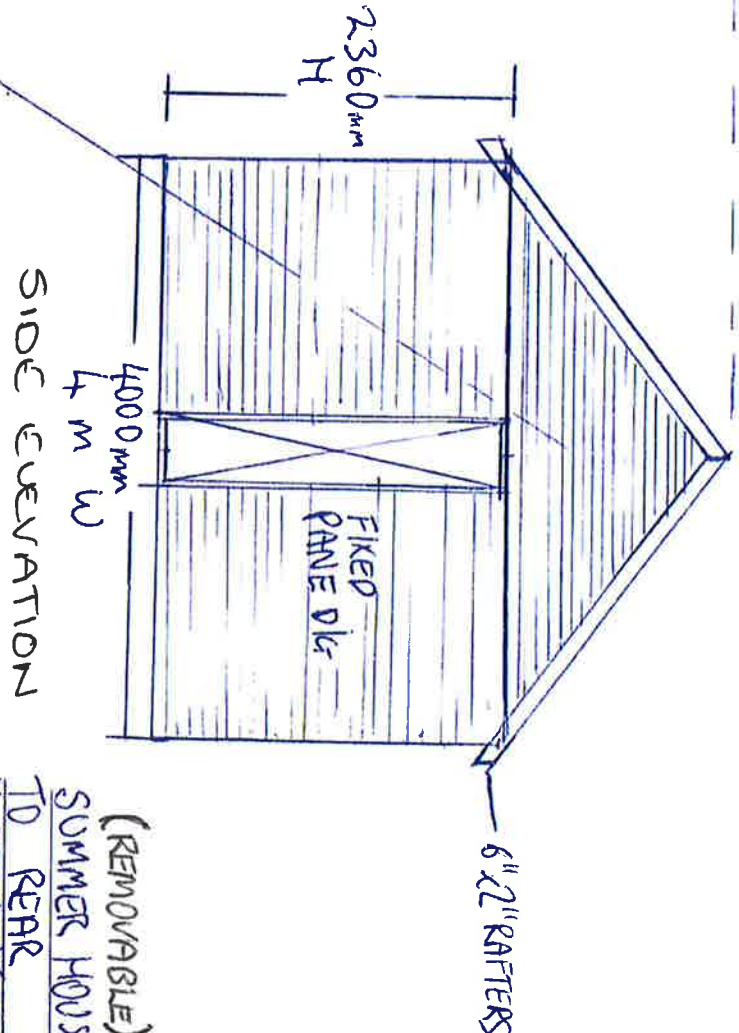

SIDE ELEVATION

(REMOVABLE)
SUMMER HOUSE
TO REAR
16 BELMONT GRAVE
BEDHAMPTON
PO9 3PU

SCALE 1.50 on A4