




THIS DRAWING IS TO BE READ IN CONJUNCTION WITH SEPARATE GROUP / SITE SPECIFIC CONSTRUCTION NOTES AND MATERIALS SPECIFICATION.

DRAWING NOTES
All tree and shrub locations and species must be taken into consideration by the project Structural Engineer to ensure that foundation design accords with the specifications set out in Chapter 4 of the NHC Standards.
The Landscape Contractor must ensure that plant material is planted in the locations shown and with NO SUBSTITUTIONS made without consulting the Group Landscape Design Department. It is the Landscape Contractor's responsibility to ensure that all underground services have been located and identified in advance of tree pit excavation so that no services are damaged or compromised by tree planting. Any changes to tree positions, species or specifications must be approved by the Group Landscape Design Department. Underground service strips are to be kept free of all plant material. Contractors must comply with all Health and Safety regulations and be aware of project/site specific information including referring to the information set out in the CDM drawings.

**SHEET LAYOUT
LOCATION PLAN**
NOT TO SCALE

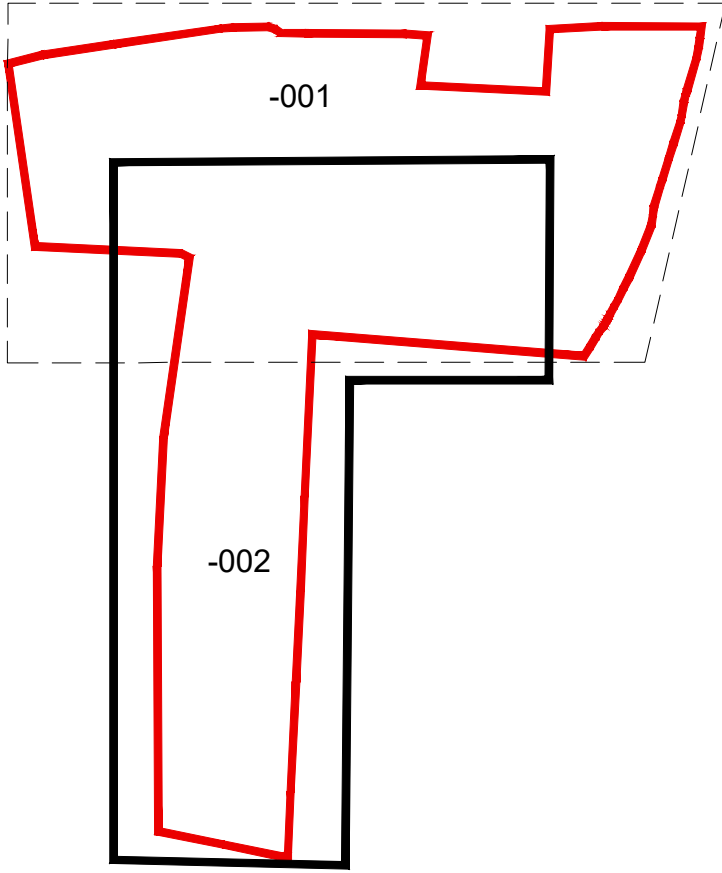


LEGEND

- EXISTING HEDGES
To be retained
- PROPOSED TREES
Heavy Standard/Selected/Standard
See Schedule
- ORNAMENTAL HEDGE
See Schedule
- PROPOSED PLANTING
Shrubs/Herbaceous/Grasses
See Schedule
- AMENITY GRASS AREAS
Turf or Wear Tolerant Turfgrass Mixture
Emmorgate EG22 sown at 25g/m²
Kept mown short to 40mm
- WILDFLOWER MEADOW
Special General Purpose Meadow Mixture
Emmorgate EM2 sown at 4 g/m²
(Existing grassland to be retained and managed. Where reversion is required see as above)
- GRAVEL
40mm of Golden Gravel
Over Geotextile Membrane

CDM LEGEND

Symbol	Brief description of risk
	Caution overhead / underground services.
	Trees have protection order in place, guarding required.

NOTES:
Principal contractor to ensure all health and safety procedures are being correctly followed in relation to all temporary works.

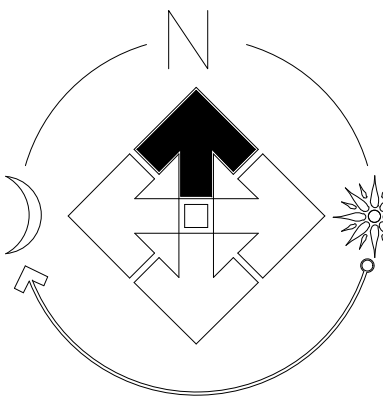

**PLOT NUMBER
SHEET REF.**
SHEET 001 (1-81)
SHEET 002 (82-122)

**FOR SPECIFICATION,
PLANTING DETAILS &
SCHEDULE SEE DRAWING
SO141-LS-003**

Revision	Date
A	27.10.21
B	14.02.22
Job:	Parcel 3B, Berewood
Title:	Site Landscaping
Scale:	1:250 @A0
Date:	Oct 2021
Drawn:	LP
Checked:	PmJ
THIS DRAWING AND THE BUILDING WORKS DESIGNED ARE THE COPYRIGHT OF J.S. BLOOR (SERVICES) LIMITED AND ARE NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF J.S. BLOOR (SERVICES) LIMITED. NO LIABILITY WILL BE ACCEPTED FOR AMENDMENTS MADE BY OTHER PERSONS.	
J.S. BLOOR (SERVICES) LIMITED ASHBY ROAD, MEASHAM, SWADLINCOTE, DERBYSHIRE DE12 7JF TELEPHONE 01530 270100 FACSIMILE 01530 272006	
Drawing No.	SO141-LS-002b