East Street

The Pallant

Building line high level

Building line low level

Timber fence

bench

Car 01 (no. 9)

Blue = previously approved

Car 02 (no. 9)

Planter C

Planter E

Planter B

gate

gate

gate

10 cycles

Planter D

Car 03 (no. 9)

Car 04 (no. 9)

Car (plot 1)

Car (plot 2)

Car (plot 3)

Car (plot 4)

Car (plot 5)

Car (plot 6)

Car (no. 10A))

gates

fencing

fencing

Garden

1.5m close boarded fence

9 10 FFL

50m2 amenity area

Planter A

bench

Plot 01

Blue == previously approved

Plot 02

Plot 03

Plot 04

Plot 05

Plot 06

Amenity

bench

Planter F

1.2m high fence

1.2m high fence

1.2m high fence

1.2m high fence

1.2m high fence

1.2m high fence

3.20

LANDSCAPE SPECIFICATION

GENERAL
All work shall be carried out in accordance with BS 4428 Code of Practice for General Landscape Operations

TOPSOIL
Topsoil removed from the construction area will be stored on site for re-use in the planting beds and will be stored in accordance with BS3882.
Topsoil shall be free of pernicious weeds and roots, rubbish and debris, building and other foreign matter, which shall all be removed off site, and shall not be contaminated by chemicals.

PLANTING
Plants to be to BS3936 Part 1 to the sizes and names specified. All plants shall be British grown and from approved sources.
Plants shall be well balanced and with a minimum of 3 breaks/ per plant. One Agrokem Yellow Slow release Fertiliser 15g tablet per plant is to be incorporated at the time of planting. All plant handling shall comply with the Code of Practice for plant handling 'The National Plant Specification ' produced by the HTA, Sep 1997.'
Planting shall be carried out between November and March.
All shrub planting areas shall have a minimum of 400mm depth of topsoil. Prior to planting the soil shall be broken down to a fine tilth and any stones in excess of 50mm removed from the surface. Top of topsoil after cultivations shall be 200mm below DPC and 50mm below timber edge-boards.
Climbing plants shall be set 300mm from base of wall.
Planted areas other than central courtyard bed shall be covered by 50mm medium grade, well-rotted bark mulch, bringing levels to those indicated on the Landscape general arrangement drawing.

MAINTENANCE
All maintenance to be carried out for a Maintenance Period in perpetuity after completion of planting.
Shrub beds shall be kept free of weeds. Chemical herbicide is to be used on docks, and other pernicious weeds, in accordance with manufacturers directions. Weeds between herbaceous plants are to be removed by hand. Levels of bark mulch are to be maintained at minimum depth of 50mm throughout the Maintenance Period.
The Contractor shall water as necessary at time of planting and during the Maintenance Period, to ensure establishment.
Pruning of shrubs shall be carried out as required to promote bushy growth. At the end of the growing season the shrubs are to be checked and all dead wood, broken or damaged braches are to be cut out.
Pruning of flowering shrubs for bushy growth shall conform to the following timetable.
a. Shrubs that flower in winter shall be pruned in Spring.
b. Shrubs that flower in march to July shall be pruned immediately after flowering.
c. Shrubs that flower from July to September shall be cut back to old wood in January/February.
Any shrubs, climbers or other plants found to be dead, defective or missing at the end of the Maintenance Period shall be replaced by the Contractor with plants equal to the original at his own cost

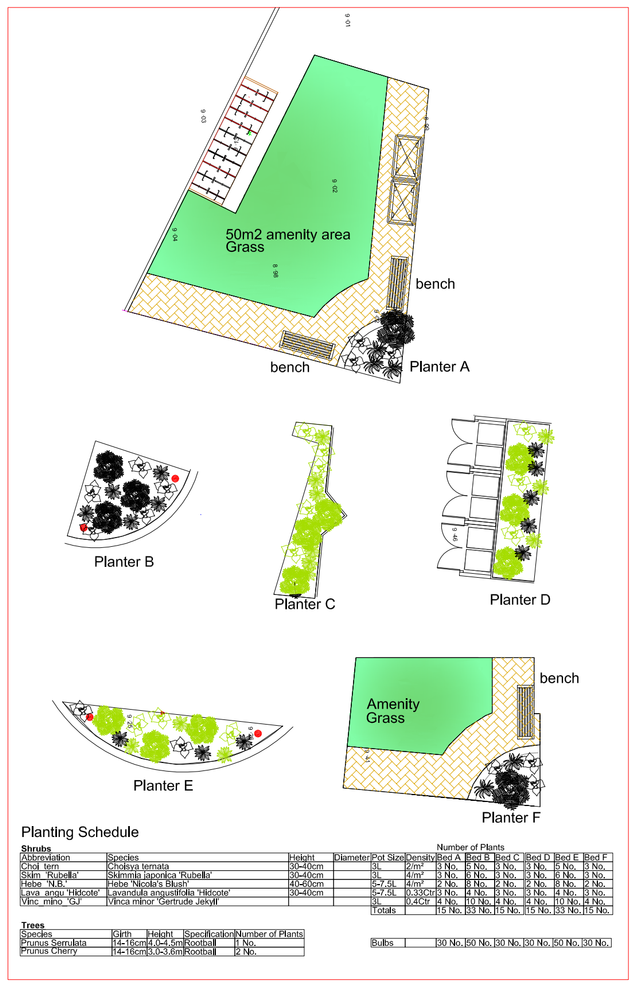

Planting Schedule

Shrubs

Abbreviation	Species	Height	Diameter	Pot Size	Density	Bed A	Bed B	Bed C	Bed D	Bed E	Bed F
Chol_tern	Choisya ternata	30-60cm		3L	2/m²	13 No.	6 No.	13 No.	13 No.	10 No.	13 No.
Skim - 'Rubella'	Skimmia japonica 'Rubella'	30-60cm		3L	4/m²	13 No.	16 No.	13 No.	13 No.	8 No.	13 No.
Hebe 'N.B.	Hebe 'Nicola's Blush'	40-60cm		2Lt / 5L	4/m²	7 No.	8 No.	7 No.	12 No.	8 No.	7 No.
Lavst_stoe_'Hidcote'	Lavandula stoechas'Hidcote'	30-60cm		2Lt / 3L	3/m²	10 No.	14 No.	10 No.	13 No.	8 No.	10 No.
Vinc_mino_'GJ'	Vinca minor 'Gertrude Jekyll'			9cm	10/m²	74 No.	110 No.	74 No.	84 No.	110 No.	74 No.
				Totals		115 No.	153 No.	115 No.	115 No.	153 No.	115 No.

Trees

Species	Girth	Height	Specification	Number of Plants
Prunus Serrulata	14-16cm	2.0-2.5m	Rootball	5 No.
Prunus cherry	14-16cm	3.0-3.5m	Rootball	2 No.

Bulbs	130 No.	150 No.	130 No.	130 No.	150 No.	130 No.

Key to Surface Materials

- Marley Block Pavours 200x100 Herringbone pattern
- Marshalls Saxon Paving 400x400 - Colour: Sandstone
- Grass
- Cobbles - close set in concrete 100mm average dia. - stone
- Cycle stand 'Sheffield' - Stainless steel
- Lighting Bollard ZONE - E27 Commercial Bollard | IP65 | Textured Black

Seats/Benches - Furnitubes
Fordham F03 B5 1500mm wide

Railings
Evador Buckinghamshire 900mm high



Fencing detail 1/50

N

0 1M 5M 10M

500mm 2M

SCALE 1/100

DATE July 21

AUTHOR PG

TITLE Residential Developments

5/7/9/11 East Street & 10A, The Pallant - Havant

DETAIL Details of Landscaping & Hard Surfacing

DRAWING No 21/100/LS01

CONTRACTOR MUST CHECK ALL DIMENSIONS ON SITE BEFORE ANY DIMENSIONS ARE TO BE TAKEN FROM THIS DRAWING. ANY DISCREPANCIES TO BE REPORTED BEFORE PROCEEDING.

© COPYRIGHT

PETER GALLOWAY PARTNERSHIP
pgp ARCHITECTS
HAVANT
TEL. 02392 483153 MOB. 07808 483362
E-MAIL: peter@pgparchitects.co.uk