

Preliminary Assessment

BREEAM 2018 NC

Unit 502, Dunsbury Park



+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Prepared for

Portsmouth City Council

Prepared by

Jeanne Davidson

Quality Assured by

Daria Voronina

Issue number

1

Date of issue

12 August 2021

Our reference

6112–Unit 502 Dunsbury Park–BREEAM 2018 NC Prelim report–2108–12jd.docx

Disclaimer

This report is made on behalf of Eight Associates. By receiving the report and acting on it, the client – or any third party relying on it – accepts that no individual is personally liable in contract, tort or breach of statutory duty (including negligence).

Contents:

Executive Summary	1
Early Stage Credits	4
Score Breakdown	6
Management	7
Health and Wellbeing	10
Energy	13
Transport	16
Water	17
Materials	19
Waste	22
Land Use and Ecology	25
Pollution	28
Appendix A – Man 03	31

Executive Summary

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Introduction

Eight Associates, as registered BREEAM assessors, have carried out an assessment of the proposed new development at Dunsbury Park. This assessment is under the BREEAM 2018 New Construction Shell & Core Methodology.

This summary is a pre-assessment of the development and details the anticipated score following the information provided by the design team at a meeting held on 02 July 2021 with BREEAM Advisory Professional Jeanne Davidson, and subsequent discussions.

Project Summary

Dunsbury Park consists of around 50 acres adjacent to junction 3 of the A3 at Waterlooville, approximately 8 miles north of Portsmouth, situated in Havant Borough Council's catchment and planning area. The proposed development comprises the continued construction of new industrial B1/B2/B8 units with a remaining combined floor area of approximately 45,000 sq. m. (470,000 sq. ft.), including associated site infrastructure works. The planning application consists of 8 industrial units across the site associated access roads and landscaping on a site in Dunsbury Park. All units have a shell and core warehouse area with an office situated on the first floor. This preliminary assessment is for Unit 502.

Client requirement for the new build industrial development is as follows:

- Excellent BREEAM rating

Score Summary

The site reviewed currently targets a score of **80%**, which equates to an **Excellent** rating.

This is in line with Eight Associates recommendations of a safety margin of at least 3–5% to safeguard any rating at formal assessment.

BREEAM Introduction

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

The BREEAM Standard

BREEAM (Building Research Establishment's Environmental Assessment Method) is the world's first sustainability rating scheme for the built environment. It sets the standard for best practice in sustainable design and has become the de facto measure used to describe a building's environmental performance.

To date BREEAM has been used to certify over 560,000 building assessments across the building life cycle and is being applied in over 80 countries.

BREEAM is developed, operated and maintained by BRE Global Ltd and the operation and direction of the method is overseen by an independent Sustainability Board, representing a wide cross-section of construction industry stakeholders. Further information about BREEAM, including copies of the BREEAM standards, can be found at www.breeam.org.

Aims of BREEAM

- To mitigate the impacts of buildings on the environment
- To enable buildings to be recognised according to their environmental benefits.
- To provide a credible, environmental label for buildings.
- To stimulate demand for sustainable buildings.

BREEAM New Construction

BREEAM New Construction is a performance-based assessment method and certification scheme for new buildings.

The primary aim of BREEAM New Construction is to mitigate the life cycle impacts of new buildings on the environment in a robust and cost-effective manner. It attempts to quantify and reduce the environmental burdens of buildings by rewarding those designs that take positive steps to minimise their environmental impacts.

Projects are assessed at design and post-construction stages using a system of environmental issues grouped within the following sections:

- Management
- Health and Wellbeing
- Energy
- Transport
- Water
- Materials
- Waste
- Land Use & Ecology
- Pollution
- Innovation

BREEAM Introduction

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Process of the Assessment

Under BREEAM New Construction 2018, assessments take place over two phases:

- Design Stage (DS): This is based on the final design for the development and the intentions of the design team. Submission before the completion of RIBA Stage 4.
- Post Construction Stage (PCS): This is based on the built development and requires the BREEAM assessor to carry out a site visit. Submission at RIBA Stage 6.

An interim certificate will be provided following submission of the Design Stage Assessment, with final certification being awarded following the completion of the PCS Assessment.

Ratings

The assessment process results in a rating on a scale of PASS, GOOD, VERY GOOD, EXCELLENT and OUTSTANDING. The rating bands for each are as follows:

Rating	Minimum Score Required	Performance equivalent to (% of UK new non-domestic buildings)
Pass (P)	30%	<75% (standard good practice)
Good (G)	45%	<50% (intermediate good practice)
Very Good (VG)	55%	<25% (advanced good practice)
Excellent (E)	70%	<10% (best practice)
Outstanding (O)	85%	<1% (innovator)

Mandatory Credits

Some credits, or criteria within credits, are mandatory to achieve certain ratings:

BREEAM Issue	P	G	VG	Excellent	O
Man 03: Responsible construction practices	–	–	–	1 credit	2 credits
Man 04: Commissioning & handover	–	–	1 credit ¹	1 credit	1 credit
Man 04: Commissioning & handover			Criterion 11 ²	Criterion 11	Criterion 11
Man 05: Aftercare	–	–		1 credit ³	1 credit
Ene 01: Reduction of CO ₂ emissions	–	–	–	4 credits	6 credits
Ene 02: Energy monitoring	–	–	1 credit	1 credit	1 credit
Wat 01: Water consumption	–	1 credit	1 credit	1 credit	2 credits
Wat 02: Water monitoring	–	Criterion 1 ⁴	Criterion 1	Criterion 1	Criterion 1
Mat 03: Responsible sourcing	Criterion 1 ⁵	Criterion 1	Criterion 1	Criterion 1	Criterion 1
Wst 01: Construction waste	–	–	–	–	1 credit
Wst 03: Operational waste	–	–	–	1 credit	1 credit

¹ Commissioning – testing schedule and responsibilities must be produced for the site.

² A Building User Guide must be developed prior to handover, for distribution to the building occupiers and premises managers.

³ Complete required commissioning activities over a minimum 12-month period once the building has become occupied.

⁴ A water meter must be specified on the mains water supply to each building

⁵ All timber and timber-based products used on the project must be legally harvested and traded.

Full details for each credit follow later in this document.

Early Stage Credits

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Early Stage Considerations

There are a number of key actions that need to be undertaken at RIBA Stages 1 and 2 of the design to achieve BREEAM credits, as required for the project. Below is a summary of the credits targeted that require these considerations to be made. Issues greyed out are not applicable to this project.

Credit	RIBA Stage	Requirement	Responsibility
Man 01 Project delivery planning	Stage 2	Project stakeholders must meet to define their roles, responsibilities and contributions for each key phase of the project by the end of RIBA Stage 2.	Project Manager, key design team members
Man 01 Stakeholder Consultation	Stage 2	Public consultation must be carried out with third party stakeholders (e.g. future building users, local community group).	Architect, Planning Consultant, Client
Man 01 BREEAM AP (Concept Design)	Stage 1 Stage 2	Appoint a sustainability champion (BREEAM AP) Agree BREEAM performance target.	Client / Project Manager
Man 02 Elemental Life Cycle Costing (LCC)	Stage 2	An Elemental Life Cycle Costing analysis must be carried out before the end of RIBA Stage 2.	Cost Consultant
Man 02 Component level Life Cycle Costing (LCC) options appraisal	Stage 4	A Component level Life Cycle Costing analysis must be carried out before the end of RIBA Stage 4.	Cost Consultant
Hea 06 Security of site and building	Stage 2	Consult with a security consultant (ALO / CPDA) to clarify security measures that should be implemented within the design	Architect

Ene 04 Passive Design Analysis	Stage 2	A Passive Design Analysis must be carried out at the early design stages to identify opportunities to implement passive design measures within the building design	Energy Specialist / M&E Consultant
Ene 04 Low Zero Carbon Feasibility Study	Stage 2	A feasibility study must be carried out before the end of RIBA Stage 2 to establish the most appropriate local low or zero carbon (LZC) energy source(s) for the building	Energy Specialist
Tra 01 Transport Assessment and Travel Plan	Stage 2	A site-specific transport assessment and draft travel plan to assess existing local transport and identify improvements to make it more sustainable.	Transport Consultant
Mat 01 Environmental impacts from construction products – Building life cycle assessment (LCA)	Stage 2	Concept design stage: The options appraisal summary document must be carried out before the end of RIBA Stage 2	Life Cycle Analysis Consultant
Mat 03 Enabling sustainable procurement	Stage 2	A sustainable procurement plan must be developed by the design team to guide specification towards sustainable construction products.	Architect / client
Mat 06 Materials Efficiency	Stage 2	Materials efficiency must be investigated, and considerations recorded at RIBA stage 2, and each stage thereafter.	Specialist Consultant / Architect / M&E

(Continued Overleaf)

Early Stage Credits

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Early Stage Considerations (continued)

Credit	RIBA Stage	Requirement	Responsibility
Wst 05 Climate Change Adaptation	Stage 2	A climate change adaptation strategy appraisal must be carried out for structural and fabric resilience before the end of the Concept Design stage.	Specialist Consultant / M&E Consultant
Wst 06 Design for disassembly and adaptability	Stage 2	A building-specific functional adaptation strategy study must be undertaken by the Concept Design, which includes recommendations for measures to be incorporated to facilitate future adaptation.	Client / Design Team
LE02 Identifying & understanding the risks and opportunities for the project	Stage 1 – 2	A Suitably Qualified Ecologist (SQE) is appointed at a project stage that ensures early involvement in site configuration and, where necessary, can influence strategic planning decisions	Client / Project Manager / Ecologist
LE03 Managing negative impacts on ecology	Stage 2 – 4	Roles and responsibilities for managing negative impacts on the ecology are clearly defined to support successful delivery of project outcomes at an early enough stage to influence the Preparation and Brief or Concept Design	Client / Project Manager / Ecologist

Extra Appointment Considerations

It should also be considered that there are a number of external consultant reports that will be required to meet some of the BREEAM requirements for the credits that have been targeted.

These include the following appointments / reports:

- Acoustician: Noise Attenuation (Pol 05)
- Security Consultant: Safety and Security (Hea 06)
- Energy Consultant: Reduction of energy Use and Carbon Emissions (Ene 01), Low Carbon Design (Ene 04) and Thermal Comfort (Hea 04)
- Transport Consultant: (Tra 01): Travel Plan
- Ecologist: Minimising impact on existing site ecology, enhancing site ecology and long term impact on biodiversity (LE 03, LE 04 and LE 05)
- Flood Risk Consultant: Surface Water run off (Pol 03)

Score Breakdown

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk


Rating Summary

The following summary represents the scheme's preliminary score based on the assumptions in the following pages.

Credit Categories	% Targeted	Weighting	Score
Management	89%	11.0%	9.77%
Health and Wellbeing	100%	8.0%	8.00%
Energy	52%	14.0%	7.33%
Transport	83%	11.5%	9.58%
Water	100%	7.0%	7.00%
Materials	71%	17.5%	12.50%
Waste	80%	7.0%	5.60%
Land Use and Ecology	77%	15.0%	11.53%
Pollution	75%	9.0%	6.75%
Innovation	20%	10.0%	2.00%
Total Score			80.0%
Rating			Excellent

Graphics Breakdown

The graph below shows the credits currently targeted (dark blue), action credits that are also being targeted (red) and remaining credits in each BREEAM section (light blue).

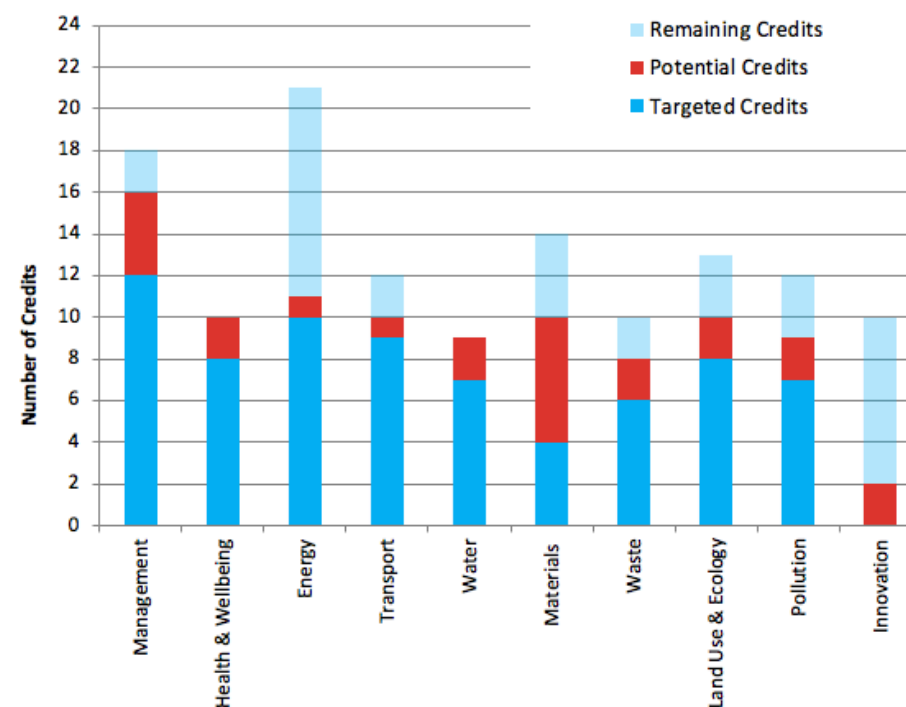

Management

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Man 01: Project Brief and Design

3 of 4

Stakeholder Consultation (two credits)

The design team has met to identify roles and responsibilities, as well as contributions for each key phase of the project.

The design team has decided that consultation with the appropriate stakeholders in accordance with BREEAM requirements is not being pursued at this time.

BREEAM AP (two credits)

The design team has confirmed that a BREEAM Accredited Professional (AP) will be involved to monitor and report progress against the established BREEAM targets by attending key project team meetings during all stages of the design and construction. The BREEAM AP attended the initial design team meeting and will continue to attend key meetings, identifying risks and opportunities to achieving each target and provide feedback to the project team.

In total, three out of four credits are currently targeted for this issue.

Man 02: Life Cycle Cost and Service Life Planning

4 of 4

Elemental Life Cycle Costing (two credits)

An elemental life cycle cost analysis will be carried out by RIBA stage 2 in accordance with PD 156865–2008.

Component Level Life Cycle Options Appraisal (one credit)

A component level LCC options appraisal will be carried out by RIBA stage 4 to minimise life cycle costs and maximise value.

Capital Cost Reporting (one credit)

The design team has committed to report the capital cost for the building in pounds per square metre (£/m²), via the BREEAM Assessment Scoring and Reporting tool in line with BREEAM requirements.

In total, four out of four credits are currently targeted for this issue.

Management

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Man 03: Responsible Construction Practices

6 of 6

Mandatory Requirements

At least one credit must be awarded under responsible construction management to achieve an Excellent rating.

Timber (prerequisite)

The contractor will be required to ensure all site timber, such as hoarding, will be legally harvested and traded.

Environmental Management (one credit)

The design team will appoint a principal contractor who operates an Environmental Management System for their main operations, certified under ISO14001/ EMAS or an equivalent standard.

BREEAM Accredited Professional (AP) (prerequisite)

The client and the contractor will formally agree performance targets. A BREEAM AP has been involved in the project at an appropriate time and level as shown by this preliminary report produced at RIBA Stage 2.

BREEAM AP (Site) (one credit)

The BREEAM AP services of Eight Associates will ensure on-going compliance with the relevant sustainability performance on site once the contractor is appointed. Eight Associates will be involved with the project team undertaking regular spot checks to ensure risks are minimised and monitoring construction progress.

Responsible construction management (two credits + 1 exemplary level credit)

The contractor will be required to complete all the BREEAM required items in the table in Appendix A of this report in order to achieve two credits plus the exemplary level credit.

Monitoring of Construction-site impacts (two credits)

The design team has confirmed that the contractor will be required to ensure an individual is responsible for monitoring, recording and reporting the following:

- Energy (kWh) consumption for the site as a result of construction plant, equipment and site accommodation. Total carbon dioxide emissions must be reported.
- Water (m³) consumption arising from the use of construction plant, equipment and site accommodation.
- Transport resulting from delivery of construction materials to site and removal of construction waste from site:
 - Transportation of materials from the point of supply to the building site:
 - i. Materials used in major building elements; and,
 - ii. Ground works and landscaping materials.
 - Transportation of construction waste from the construction gate to waste disposal processing or recovery centre gate.
 - The following information will be recorded:
 - i. Litres of fuel used;
 - ii. Distance travelled (km); and,
 - iii. Carbon dioxide emissions (kgCO₂ eq).

In total, six of six credits are currently targeted for this issue plus the exemplary level credit.

Management

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Man 04: Commissioning and Handover

4 of 4

Mandatory Requirements

A Building User Guide must be produced in order to achieve an Excellent rating (even if this credit is not targeted).

Commissioning (two credits)

A member of the design team will be appointed to monitor commissioning in line with best practice (CIBSE, BSRIA and Current Building Regulations), with a specialist commissioning agent appointed for any complex systems.

Testing and inspecting building fabric (one credit)

The design team has confirmed that air tightness testing is carried out as standard. A thermography survey is also planned.

Handover (one credit)

The production of a technical manual and a non-technical building user guide in line with the BREEAM requirements is planned. In addition, a training schedule will be prepared for building occupiers / facilities managers to aid handover and correct use of the building and its services upon occupation.

In total, four of four credits are currently targeted for this issue.

Health and Wellbeing

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Hea 01: Visual Comfort

3 of 3

Daylighting (one credit)

Daylight modelling is currently included within the design scope, as it is thought that the office windows to be provided are expected to give adequate daylighting for the office areas, as are the rooflights to the warehouse areas. The development of daylighting calculations will be considered as the design progresses.

View out (one credit)

The design team has confirmed that all workstations will be 8m from a wall that has a window or permanent opening providing an adequate view out for over 95% of the floor area. In addition, windows or openings will comprise at least 20% of the surrounding wall area.

External lighting levels (one credit)

The design team has confirmed the following will be met for the scheme:

- All external lighting will provide illuminance levels that enable users to perform outdoor visual tasks efficiently and accurately.
- External lighting will be specified in accordance with BS 5489-1:2013 Lighting of roads and public amenity areas and BS EN 12464-2:2014 Light and lighting – Lighting of workplaces – Part 2: Outdoor workplaces);

In total, three of three credits are currently targeted for this issue.

Hea 02: Indoor Air Quality

1 of 1

Indoor Air Quality plan (prerequisite)

A formalised Indoor Air Quality plan is planned for showing how to reduce indoor air pollution. The services and ventilation will be designed to reduce any odours and disperse any pollution.

Ventilation (one credit)

The design team has confirmed that it may be possible to achieve due to the 10m distance between air intakes and exhausts requirement and the need for air intakes to be over 10m from roads and car parks.

The available credit is currently targeted for this issue.

Health and Wellbeing

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Hea 04: Thermal Comfort

2 of 2

Thermal modelling (one credit)

Thermal modelling, in line with CIBSE AM11, will be undertaken for the development using full dynamic thermal analysis software. Summer and winter operative temperature ranges in occupied spaces will be in accordance with the criteria set out in CIBSE Guide A Environmental design.

Design for future thermal comfort (one credit)

The design team has confirmed that the thermal modelling will include an allowance for a projected climate change environment.

In total, two of two credits are currently targeted for this issue.

Hea 05: Acoustic Performance

1 of 1

An acoustician will be consulted on internal acoustics. The building will be designed to ensure that the indoor ambient noise will meet the levels set in Section 7 of BS 8233.

The available credit is currently targeted for this issue.

Health and Wellbeing

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Hea 06: Security

1 of 1

Security of site and building (one credit)

The design team has confirmed that a suitably qualified security specialist will be consulted during the planning process and by Concept Design stage, and recommendations will be incorporated into the design.

In total, one of one credit is currently targeted for this issue.

Hea 07: Safe and Healthy Surroundings

2 of 2

Safe access (one credit)

The design team has confirmed that dedicated and safe cycle paths and pedestrian routes will be provided from the public footpath to the site entrance and to cycle. Delivery areas will also be separate from the car park areas.

Outside space (one credit)

The design team has confirmed the provision of an outside amenity area for building users of each unit will be provided.

In total, two out of two credits are currently targeted for this issue.

Energy

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Ene 01: Reduction of CO2 Emissions

4 of 13

Mandatory Requirements

At least four credits must be achieved in order to secure an Excellent rating.

Energy Performance (nine credits)

An Energy Performance Certificate will be produced at design stage, based on Part L 2013 standards. Based on the building services and fabric specified, it is assumed that at least three of the available nine credits under this issue will be achieved.

Please note that the BREEAM guidance requests a copy of the Building Regulations Output (BRUKL Output Document) based on the design stage of analysis and an as-built copy of the document for the PCR stage.

Prediction of operational energy consumption (four credits)

It has been decided by the design team that a study on operational energy performance is not required at this time.

Four of thirteen credits are targeted for this issue.

Ene 02: Energy Monitoring

2 of 2

Mandatory Requirements

One credit is required for sub-metering of major energy consuming systems in order to achieve an Excellent rating.

Sub-metering of end-use categories (one credit)

Pulsed sub-meters will be provided to ensure the following are met:

1. Energy metering systems are installed that enable at least 90% of the estimated annual energy consumption of each fuel to be assigned to the various end-use categories of energy consuming systems.
2. The energy consuming systems in buildings with a total useful floor area greater than 1,000m² are metered using an appropriate energy monitoring and management system.
3. The systems in smaller buildings are metered either with an energy monitoring and management system or with separate accessible energy sub-meters with pulsed or other open protocol communication outputs, to enable future connection to an energy monitoring and management system.
4. The end energy consuming uses are identifiable to the building users, for example through labelling or data outputs.

In addition, accessible automatic meter reading systems will be provided. These will cover a significant majority of the energy supply to the relevant function areas within the building.

Sub-metering of high energy load and tenancy areas (one credit)

The design team has confirmed that there will be sub-metering per floor plate of the office areas.

Two of two credits are currently targeted for this issue.

Energy

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Ene 03: External Lighting

1 of 1

The design team has confirmed that any external lighting will have an average initial luminous efficacy of greater than 70 luminaire lumens per circuit Watt. All external light fittings will be automatically controlled to prevent operation during daylight hours. There will be no need for presence detection as there will be no public traffic past the buildings.

One of one credit is currently targeted for this issue.

Ene 04: Low Carbon Design

2 of 3

Passive Design Analysis (one credit)

The project team will carry out an analysis of the proposed building design to influence decisions made during Concept Design stage, and the requirements for the BREEAM credit will be met.

Free Cooling (one credit)

The design team has confirmed that the credit for free cooling will not be targeted as mechanical cooling is proposed for the office areas.

Low and Zero Carbon Technologies (one credit)

A feasibility study will be carried out by an independent energy specialist to establish the most appropriate local low or zero carbon energy source for the development, and an LZC technology will be specified in line with the recommendations of this report (resulting in a reduction in CO₂ emissions).

Two of three credits are currently targeted for this issue.

Energy

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Ene 06: Energy Efficient Transportation Features

2 of 2

Energy consumption (one credit)

The design team has confirmed that a transportation demand and usage pattern analysis for the building to determine the optimum number and size of lifts will be carried out in accordance with BS EN ISO 25745. The energy consumption will be calculated for at least two types of system and the one with the lowest energy consumption will be specified.

Energy efficient features (one credit)

The design team has confirmed they will be specifying the following energy efficient features for each lift:

- A standby condition for off-peak periods.
- The lift car lighting and display lighting provides an average luminous efficacy across all fittings in the car of >70 luminaire lumens per circuit Watt.
- Use of a drive controller capable of variable speed, variable-voltage, and variable-frequency (VVF) control of the drive motor.

Regenerative drives will be considered where these would produce an energy saving greater than the additional standby energy used to support the drives.

Two of two credits are targeted.

Transport

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Tra 01: Transport Assessment and Travel Plan

2 of 2

Travel Plan (two credits)

The design team has confirmed that during the feasibility and design stages a travel plan will be developed based on a site-specific travel assessment or statement.

The travel plan will include proposals to increase/improve sustainable modes of transport and movement of people and goods.

Two of two credits are targeted for this issue.

Tra 02: Sustainable Transport Measures

8 of 10

Transport options implementation (ten credits)

The design team has confirmed that the potential sustainable transport measures can be targeted, with the following considered for inclusion:

- Provide a public transport information system.
- Install compliant cycle storage spaces and cyclist facilities (lockers and changing space).
- Provide electric recharging stations of a minimum of 3kW for at least 10% of the total car parking capacity for the development.
- Provide priority spaces for car sharers for at least 5% of the total car parking capacity for the development and locate those spaces nearest the building's main entrance.
- Proximity to existing amenities.
- Ensure the creation of one new accessible amenity (outside space, as explained in Hea 07 above).

Six out of ten credits are targeted for this issue.

Water

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Wat 01: Water Consumption

5 of 5

Mandatory Requirements

At least one credit is required for an Excellent rating.

The design team has confirmed that they will aim for a 55% improvement in water consumption (litres/person/day) compared to BREEAM's notional baseline performance.

To achieve this, it is anticipated that specified sanitaryware will meet the following thresholds:

- WCs will have 4/2.5 litre dual flush,
- Wash hand basins will have a flow rate of no greater than 3 litres/min
- Showers will have a flow rate of no greater than 3.5 litres/min.
- Kitchen taps will have a flow rate of no greater than 5 litres/min
- Domestic dishwashers will have a capacity of no greater than 10 litres/cycle.

Alternatively higher flush volumes and flow rates can be provided if there is a rainwater harvesting system installed in compliance with BS EN 16941-1:2018.

Five of five credits are currently targeted for this issue.

Wat 02: Water Monitoring

1 of 1

Mandatory Requirements

A water meter must be specified (even if this credit is not targeted) in order to achieve an Excellent rating.

The design team has confirmed that a pulsed water meter will be installed on the mains water supply to each building.

There will be no water-consuming plant or building areas consuming 10% or more of the building's total water demand.

The available credit is currently targeted for this issue.

Water

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Wat 03: Water leak detection and prevention

2 of 2

Leak detection (one credit)

The design team has confirmed a major leak detection system on the mains water supply within the building and between the building and the utilities water meter will be provided. The system will comply with the following:

- Permanent and automated.
- Activated when the flow of water is at a flow rate above a pre-set maximum for a pre-set period of time.
- Able to identify different flow and leakage rates.
- Programmable to suit the owner/occupiers' water consumption criteria.
- Where applicable, designed to avoid false alarms caused by normal operation of large water-consuming plant such as chillers.

Sanitary shut-off system (one credit)

Flow control devices that regulate the supply of water to each WC area according to demand will be installed. This will assist with minimising water leaks and wastage from worn sanitary fittings. This is generally a solenoid valve linked to a PIR in each toilet core.

Two of two credits are currently targeted for this issue.

Wat 04: Water efficient equipment

1 of 1

The design team has confirmed that the planting currently envisaged for the development will be native species and as such reliant on precipitation throughout the year. There will be no need for sprinklers or hoses.

The available credit is currently targeted for this issue.

Materials

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Mat 01: Environmental impacts from construction products

Building life cycle assessment (LCA)

4 of 7

Superstructure (six credits)

The design team has confirmed that a Life Cycle Assessment (LCA) will be carried out at key stages to demonstrate that the specification of material build-ups and their impact has been considered.

Substructure and hard landscaping options appraisal during Concept Design (all building types) (one credit)

The design team has confirmed that during Concept Design, opportunities have been identified to reduce environmental impacts.

Four of seven credits are targeted for this issue.

LCA and LCC alignment (exemplary level credit)

The design team have confirmed that the LCA and LCC alignment credit will be targeted to achieve one exemplary level credit.

Third party verification (exemplary level credit)

The design team have confirmed that third party verification will take place for the LCA to achieve one exemplary level credit.

Mat 02: Environmental impacts for construction products

Environmental Product Declarations (EPD)

1 of 1

The contractor will be asked to source materials covered by an EPD where possible. This credit is targeted at design stage and will also be included at post construction stage if the contractor confirms compliance. A minimum of 14 materials products with EPDs will need to be sourced.

The available credit is currently targeted for this issue.

Materials

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Mat 03: Responsible Sourcing of Materials

3 of 4

Mandatory Requirements

The pre-requisite for this issue must be complied with (even if this issue is not targeted) in order to achieve any rating.

Pre-requisite

The design team has confirmed that all timber used on the project will be legally harvested and traded timber.

Enabling sustainable procurement (one credit)

UMC will have a sustainable procurement plan in place before Concept Design to guide specification towards sustainable construction products.

Measuring Responsible Sourcing (three credits)

The design team has confirmed that, where possible, key building elements will be responsibly sourced (e.g. all timber FSC certified, and any bricks, pavers, concrete, glass, metals, plaster etc. covered by BRE Global, BES 60001 certification, or EMS certified for both the key process and supply chain extraction process).

Three of four credits are targeted for this issue.

Mat 05: Designing for Durability and Resilience

1 of 1

Protecting Vulnerable Parts of the Building from Damage

Materials and features will be specified to protect vulnerable parts of both the internal and external areas of the building.

Protecting Exposed Parts of the Building from Material Degradation

The relevant building elements incorporate appropriate design and specification measures to limit material degradation due to environmental factors. The elements will either achieve an appropriate quality or durability standard or a resilience assessment will be carried out on the element.

The available credit is targeted for this issue.

Materials

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Mat 06: Material Efficiency

1 of 1

The design team has confirmed that opportunities will be identified, and appropriate measures investigated and implemented, to optimise the use of materials in building design, procurement, construction, maintenance and end of life.

The above will be carried out by the design team in consultation with the relevant parties at each of the following RIBA stages:

- Preparation and Brief
- Concept Design
- Developed Design
- Technical Design
- Construction.

The available credit is targeted for this issue.

Waste

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Wst 01: Construction Site Waste Management

3 of 4

Construction resource efficiency (three credits)

The design team has confirmed that a BREEAM compliant Site Waste Management Plan will be produced by the contractor and will ensure that non-hazardous waste generated throughout the building's design and construction (excluding demolition and excavation waste) will be less than 7.5m^3 (or 6.5 tonnes) per 100m^2 of gross internal floor area.

Diversion of resources from landfill (one credit)

The contractor will be required to ensure that at least 70% by volume (80% by weight) of non-hazardous waste generated by the project will be diverted from landfill, and 80% by volume (90% by weight) of demolition waste will be diverted from landfill.

Three of four credits are targeted for this issue.

Wst 02: Use of recycled and sustainably sourced aggregates

1 of 1

Project Sustainable Aggregate Points (one credit)

The use and type of aggregates within the development will be identified, as well as the total amount of recycled and/or secondary aggregate, the region the aggregate was sourced, and the distance travelled. The contractor will be required to ensure recycled and secondary aggregates are used to achieve this credit.

The available credit is targeted for this issue.

Waste

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Wst 03: Operational Waste

1 of 1

Mandatory Requirements

One credit is required in order to achieve an Excellent rating.

The design team has confirmed that a dedicated recyclable waste storage area will be provided for each unit. The space will be clearly labelled and accessible. A compactor / baler and composting facilities are not currently thought to be required for the building function, however, there is adequate space within the warehouse areas if this is required by future tenants.

The available credit is targeted for this issue.

Wst 05: Adaptation to climate change

1 of 1

Resilience of structure, fabric, building services and renewables installation (one credit)

The design team has confirmed that a climate change adaptation strategy will be undertaken for the development.

A systematic risk assessment to identify the impact of expected extreme weather conditions arising from climate change on the building over its projected life cycle. The assessment covers the installation of building services and renewable systems, as well as structural and fabric resilience aspects and includes:

1. Hazard identification
2. Hazard assessment
3. Risk estimation
4. Risk evaluation
5. Risk management.

Recommendations based on this strategy will be proposed and the implementation of those recommendations will be carried out where appropriate.

The available credit for this issue is targeted.

Waste

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Wst 06: Designing for disassembly and adaptability

1 of 2

Design for disassembly and functional adaptability recommendations (one credit)

The design team will conduct a study to explore the ease of disassembly and functional adaptation potential of different scenarios before the end of Concept Design. Recommendations and solutions will be developed based on the study that aim to enable and facilitate functional adaptation for any building change of use, ease of maintenance and replacement for singular building elements and disassembly at building end of life and functional adaptation.

Disassembly and functional adaptability implementation (one credit)

The design team will provide an update during Technical Design of how the recommendations of the study have been implemented or developed, however it is not currently clear if an adaptability and disassembly guide will be produced, therefore this credit is not currently included.

One of two credits are targeted for this issue.

Land Use and Ecology

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

LE 01: Site Selection

0 of 2

Previously developed land (one credit)

The development is not situated on previously developed land. This credit cannot be achieved.

Contaminated land (one credit)

The site contamination study has not yet been completed, therefore this credit is not currently targeted.

Zero of two credits are targeted for this issue.

LE 02: Identifying and understanding the risks and opportunities for the project

2 of 2

Prerequisite – Assessment route role

The contractor will be required to confirm that compliance is monitored against all relevant UK and EU legislation relating to the ecology of the site.

Route 2 – Survey and evaluation (two credits)

The design team has confirmed that the ecologist was appointed at an early project stage to ensure early involvement in the project. An appropriate level of survey and evaluation has been carried out (during the preparation and brief) to determine the ecological baseline of the site.

Two of two credits are targeted for this issue.

Land Use and Ecology

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

LE 03: Managing negative impacts on ecology

3 of 3

Pre-requisite – Identification and understanding the risks and opportunities for the site

LE 02 is achieved to meet the pre-requisite requirements.

Planning, liaison, implementation and data (one credit)

The design team has confirmed that individuals are aware of their roles and responsibilities with regards to ecology and biodiversity. The potential impact of site preparation and construction works will be identified by the ecologist to optimise benefits and outputs for biodiversity.

The project team (whilst liaising and collaborating with representative stakeholders and, taking into consideration data collated and shared), has confirmed they will propose solutions and selected measures to be implemented during site preparation and construction works.

One of one credit targeted.

Route 2 – Managing negative impacts of the project (two credits)

The design team has confirmed that negative site impacts from site preparation and construction works will be managed according to the hierarchy in line with recommendations from the ecologist. It is anticipated that there will be no loss in ecological value.

In total, three of three credits are targeted for this issue.

LE 04: Change and enhancement of ecological value.

3 of 4

Prerequisite – Identifying and understanding the risks and opportunities for the project

Roles and responsibilities have been clearly defined by the design team, site preparation and construction works have been planned, and all UK and EU legislation will be complied with.

Route 2 – Liaison, implementation and data collection (one credit)

The design team has confirmed they have liaised and collaborated with representative stakeholders, taking into consideration data collated and shared, and they will implement solutions and measures selected in a way that enhances ecological value on and off site.

One of one credit targeted.

Route 2 – Enhancement of ecology (up to 3 credits)

The project team has confirmed they will liaise and collaborate with representative stakeholders, taking into consideration data collated and shared. They will implement solutions and measures based on recommendations from recognised 'local' ecological expertise, providing solutions and measures which enhance the site.

Data collated will be provided to the local environmental records centres nearest to, or relevant for, the site.

Two of three credits targeted.

In total, two of four credits are targeted for this issue.

Land Use and Ecology

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

LE 05: Long term ecology management and maintenance

2 of 2

Prerequisite – Roles and responsibilities, implementation, statutory obligations

The design team has confirmed that all UK and EU legislation will be complied with.

Planning, liaison, data, monitoring and review management and maintenance (one credit)

The project team has confirmed that they will liaise and collaborate with representative stakeholders, taking into consideration data collated and shared, on solutions and measures implemented.

Monitoring and reporting of outcomes and successes will be completed. One of one credit targeted.

Landscape and ecology management plan (or similar) development (one credit)

The project team has confirmed that the landscape and ecology management plan will be developed in accordance with BS 42020:2013, covering, as a minimum, the first five years after the project completes. One of one credit targeted.

In total, two of two credits are targeted for this issue.

Pollution

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Pol 01: Impact of refrigerants

1 of 3

Pre-requisite

All systems with electronic compressors will comply with the requirements of BS EN 378:2008 (parts 2 and 3) and, where systems containing ammonia are installed, the Institute of Refrigeration Ammonia Refrigeration Systems Code of Practice.

Impact of refrigerants (two credits)

The design team confirmed that the cooling strategy of the scheme will have Direct Effect Life Cycle CO₂ equivalent emissions (DELC CO₂e) of ≤ 1000 kgCO₂e/kW cooling/heating capacity.

One of two credits targeted.

Leak detection (one credit)

Leak detection has not been allowed for in the design due to cost and the small nature of the refrigerant containing equipment.

One of three credits is targeted for this issue.

Pol 02: Local air quality

2 of 2

The design team has confirmed the heating, cooling and hot water will be supplied using electricity, therefore both credits are awarded by default.

Two of two credits are targeted for this issue.

Pollution

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Pol 03: Surface water run-off

3 of 5

Flood risk (two credits)

A site-specific Flood Risk Assessment will be undertaken for the site, confirming the site is situated in a low flood risk area.

Two of two credits targeted.

Surface water run-off (two credits)

The design team has confirmed that measures will be specified to ensure that the peak run off rate for the developed site will have a 30% reduction compared to the pre-developed site. The design team confirmed that the post development run-off volume, over the development lifetime, will not be greater than it would have been prior to the site's development. The design team has not confirmed that flooding of property will not occur in the event of local drainage system failure.

One of two credits targeted.

Minimising watercourse pollution (one credit)

The design team has confirmed that the credit for minimising watercourse pollution will not be targeted at this stage, as there is no scope to include the necessary attenuation measures to ensure there is no discharge from the site for rainfall depths of up to 5 mm. The appointed flood risk consultant will confirm this further.

Zero of one credit targeted.

In total, three of five credits are targeted for this issue.

Pol 04: Reduction of night-time light pollution

1 of 1

The design team has confirmed that external lighting will be designed and installed in compliance with ILP Guidance. All external lighting will have the capacity to be switched off automatically between 11pm and 7am.

One of one credit is targeted for this issue.

Pollution

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Pol 05: Noise attenuation

1 of 1

A Suitably Qualified Acoustic Consultant will conduct a noise impact assessment in compliance with BS 4142:2014. The noise level from the proposed buildings, as measured in the locality of the nearest or most exposed noise-sensitive development, must be at least 5dB lower than the background noise throughout the day and night. Where noise is expected to be greater, attenuation measures will be specified.

One of one credit is targeted for this issue.

Appendix A – Man 03

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Ref	Criteria	Required for two credits plus the exemplary credit
Risk evaluation and implementation		
The principal contractor evaluates the risks (on site and off site), plans and implements actions to minimise the identified risks, covering the following, where appropriate:		
Vehicle movement		
a	Manage the construction site entrance to minimise the impacts (e.g. safety, disruption) arising from vehicles approaching and leaving the development footprint.	X
b	Ensure the development footprint is accessible for delivery vehicles fitted with safety features (e.g. side under run protection) to remove or limit the need for on street loading or unloading. Where on-street loading is unavoidable, this should be appropriately managed.	X
c	Identify access routes to the development footprint, including for heavy vehicles to minimise traffic disruption and safety risks to others.	X
Pollution Management		
d	Minimise the risks of air, land and water pollution.	X
e	Minimise the risks of nuisance from vibration, light and noise pollution.	X
Tidiness		
f	Practices ensure the development footprint is safe, clean and organised at all times. This includes, but is not limited to, facilities, materials and waste storage.	X
g	Ensure clear and safe access in and around the buildings at the point of handover.	X

Ref	Criteria	Required for two credits plus the exemplary credit
Health and Wellbeing		
h	Provide processes and equipment required to respond to medical emergencies.	X
i	The principal contractor identifies and implements initiatives to promote and maintain the health and wellbeing of all site operatives within the development footprint. This can be via site facilities, site management arrangements, staff policies etc.	X
j	Establish management practices and facilities encouraging equality, fair treatment and respect of all site operatives.	X
k	Provide secure, clean and organised facilities (e.g. changing and storage facilities) for site operatives within the development footprint.	X
Security processes		
l	Minimise risks of the site becoming a focus for antisocial behaviour in the local community (e.g. robust perimeter fencing, CCTV, avoid creating dark corners etc.).	X
Training, awareness and feedback		
The principal contractor is responsible for ensuring:		
m	Aspects of the construction process that might impact the community are communicated regularly, ensuring that nuisance and intrusion are minimised.	X
n	Ensure ongoing training is provided, and up to date, for personnel and visitors (covering items a to l above, as appropriate.)	X

Appendix A – Man 03

BREEAM 2018 NC

Unit 502, Dunsbury Park

eight
associates

+44 (0)207 0430 418

www.eightassociates.co.uk
info@eightassociates.co.uk

Continued

Ref	Criteria	Required for two credits plus the exemplary credit
Training, awareness and feedback		
o	The principal contractor ensures that site operatives are trained for the tasks they are undertaking (including any site-specific considerations).	X
p	The fleet operators undertake driver training and awareness to promote safety within the development footprint and off site.	X
Monitoring and reporting		
The principal contractor ensures:		
q	The fleet operator captures and investigates any road accidents, incidents and near misses and reports them back to the principal contractor. The principal contractor analyses these items.	X
r	All visitor, workforce and community accidents, incidents and near misses are recorded and action is taken to reduce the likelihood of them reoccurring.	X
s	Processes are in place to facilitate collecting and recording feedback from the community and to address any concerns related to the development footprint.	X