

HOME SHOPPING

- Existing C&C canopy to be demolished in order for new model spec 3.No lane C&C drive through to be installed with new canopy and all associated works (illuminated fascia and bird netting etc.). Removal of existing surface to allow for new layout and floor markings etc. Allow for removal of existing kerb and bollards.
- Existing van loading area components to be removed as per layout. (Protection and lining)
- New external chiller to be installed under existing van loading canopy (785.7sqft, 73m²) and other associated works (plant, door, protection, lighting, sprinklers, roof and drainage etc.).
- New external freezer to be installed under existing van loading canopy (290.6sqft, 27m²), floor to be 114mm recessed. Link to existing pod made through punching whole through wall and installing freezer door. Other associated works (plant, door, protection, lighting, sprinklers, roof and drainage etc.).
- Demolish existing Chiller and freezer in home shopping pod, in order to increase ambient space.
- Relocate plant to new location. Remove old armo and install new as per layout.
- 7 No. New van loading area to be installed with new canopy and all associated works, lighting, bird netting, protection, sprinklers etc.
- Demolish existing ISO walls and relocate data rack. Allow for all necessary associated works to allow width of corridor to be increased by 1000mm to assist with access and egress to HS pod. Sales floor cases to move up to close off existing access to redundant BOH Area.
- Allow for desk to be relocated to new location in Home shopping pod.
- Allow for removal of existing double door and enlargement of door opening. New steel 2010mm double door to be installed in replacement of old.
- Demolish existing kerb line in order to ease egress from the click and collect canopy. New kerbs and bollards to be installed as per layout.
- Remove 18 standard parking bays to allow egress for vans in and out of the yard.
- Allow for relocation of home shopping yard gate to accompany the new route.
- Allow for widening of opening to accompany model spec double batter thru doors.

CDM / H&S - HAZARD WARNING SCHEDULE				
WCEC would draw attention to possible key residual construction health and safety hazards that have not been eliminated from the designs shown on the drawings in the design process. These hazards, and comment/action are identified below.				
LOCATION	HAZARD	LIKELIHOOD	COMMENTS / ACTION	LIKELIHOOD FOLLOWING ACTION
1	Stripping out of existing materials and finishes - shrapnel objects, existing services, falling materials, asbestos.	MEDIUM	All work to be carried out under supervision of a competent person using safe working procedures and all necessary safety equipment. Care to be taken to monitor for presence of any asbestos. If discovered the material is to be removed in accordance with an approved method statement.	LOW
2	Alterations to prep areas - lifting materials, falls from height, removal of blockwork walls.	MEDIUM	Main Contractor to ensure that all specialist services sub-contractors provide method statements and employ safe working procedures at all times. All operatives to be fully trained and equipped to carry out the works in a safe manner.	LOW
3	Services - electric shock, falls from height.	MEDIUM	Main Contractor to ensure that all work is carried out by fully equipped and trained personnel in accordance with an agreed method statement.	LOW
4	Flooring work - lifting heavy materials, trip hazard.	MEDIUM	Main Contractor to ensure that all work is carried out by fully equipped and trained personnel in accordance with an agreed method statement.	LOW
5	Construction of new suspended ceilings and bulkheads - lifting materials, falls from height, falling materials.	MEDIUM	Main Contractor to ensure that all work is carried out by fully equipped and trained personnel in accordance with an agreed method statement.	LOW
Any construction personnel including operatives intending to construct the designs shown on this drawing should ensure that they have been thoroughly briefed by the Main Contractor on all health and safety matters and have sight of: - the full designers and contractors hazard and risk assessments and risk registers. - the developed construction phase health and safety plan. - the contractors construction method statements. REFER TO ASBESTOS REPORT				

© Whittam Cox Architects - Disclaimer:

This drawing is copyright of WCEC Group Ltd trading as Whittam Cox Architects, and shall not be reproduced nor used for any other purpose without the written permission of the Architects. This drawing must be read in conjunction with all other related drawings and documentation. It is the contractors responsibility to ensure full compliance with the Building Regulations. Do not scale from this drawing, use figured dimensions only. It is the contractors responsibility to check and verify all dimensions on site. Any discrepancies to be reported immediately. Materials not in conformity with relevant British or European Standards/Codes of practice or materials known to be deleterious to health & safety must not be used or specified on this project.

NOTES :

This drawing is to be read in conjunction with the following Whittam Cox Architects and ASDA documentation :

- Project specific Scope Of Works

Any discrepancies between this drawing and the above should be reported to the contract administrator.

C.D.M :

There are **NO SIGNIFICANT** risks associated with the works on this drawing that a competent contractor would not foresee

AREAS SCHEDULE:

EXISTING:

Ambient Area = 1883.7sq.ft (175m²)

Frozen Area = 269sq.ft (25m²)

Chilled Area = 452sq.ft (42m²)

Van Canopy Loading = 5No. Vans

PROPOSED:

Ambient Area (usable) = 2325sq.ft (216m²)

Frozen Area = 290.6sq.ft (27m²)

Chilled Area = 785.7sq.ft (73m²)

Van Canopy Loading = 6No. Vans

LEGEND:


HATCH FOR FROZEN COLD ROOM

HATCH FOR CHILLED COLD ROOM

1810mm S/D BATTER THRU FOR EXTERNAL ACCESS OR SINGLE (both with shutter)

NEW AIRACO

NEW CANOPY TO HOME SHOPPING & CLICK AND COLLECT

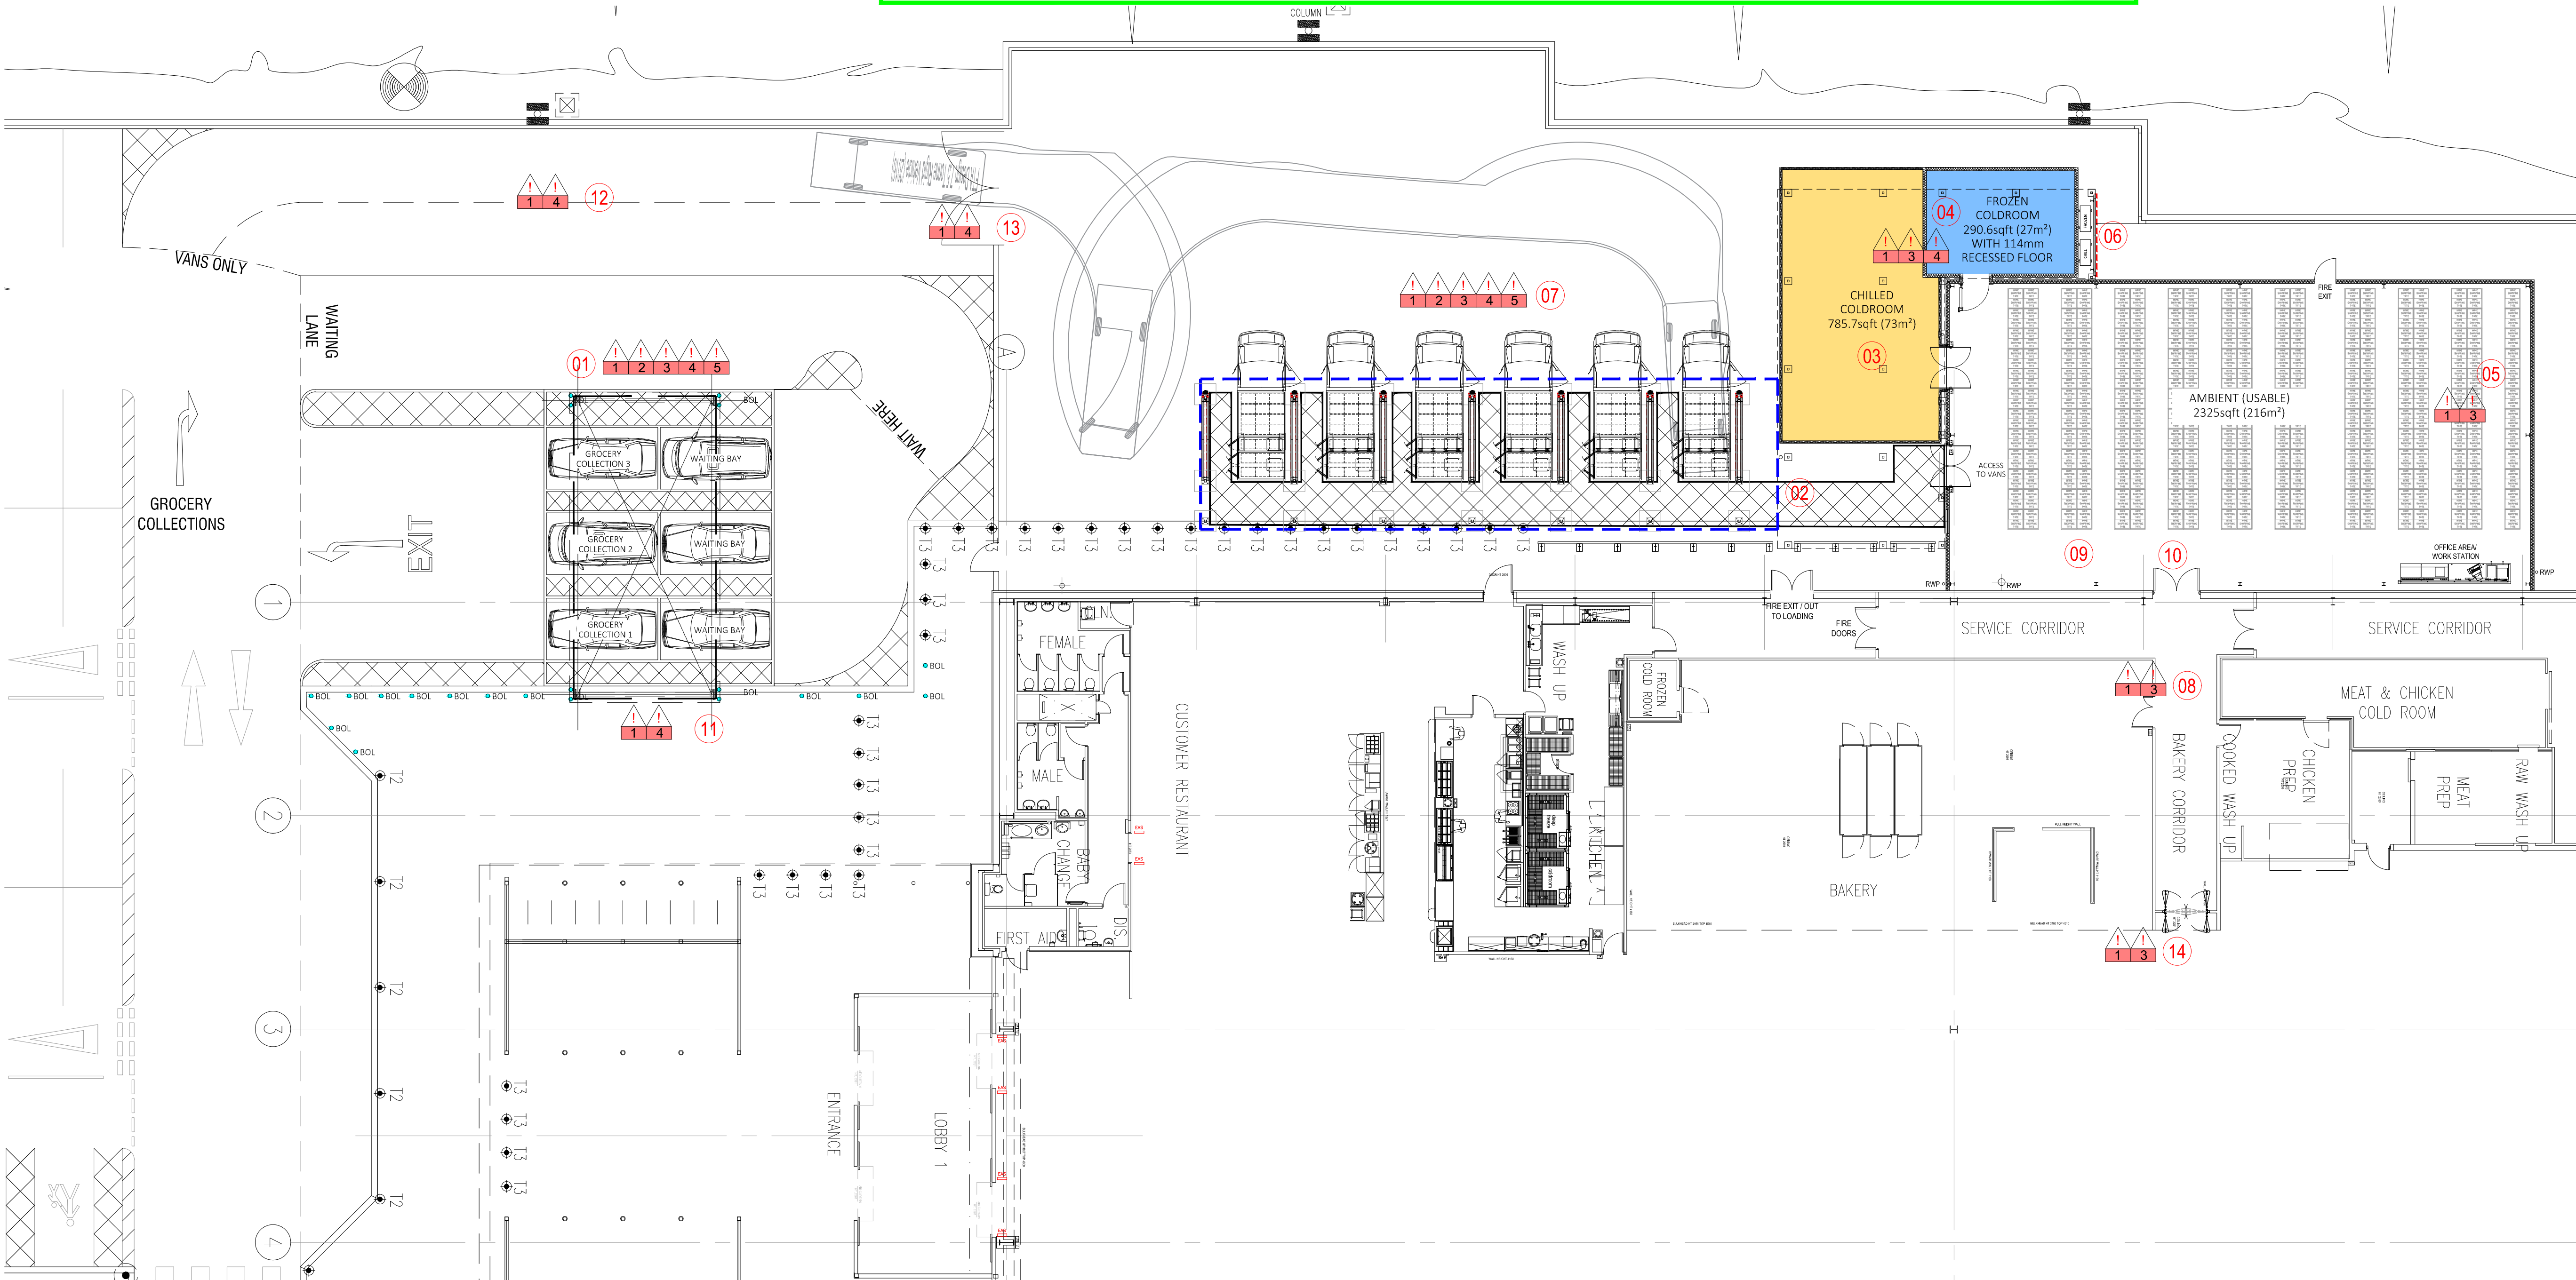

1 PROPOSED HOME SHOPPING LAYOUT
PL-06 Scale 1:150 @ A1



A 14/06/21 / Second Issue, Additional van loading bay MS / SJS
17/05/21 / First Issue MS/SJS

PLANNING

No. Total / Description / Drawn / Checked / By
CLIENT

ASDA

PROJECT
PROPOSED HOME SHOPPING
ASDA HAVANT

TITLE
PROPOSED HOME
SHOPPING LAYOUT

DRAWING STATUS
PLANNING

DRAWN MS CHECKED SJS

SCALE 1:150 @ A1

DATE MAY 2021

Whittam Cox ARCHITECTS
Chesterfield / 01246 260261
London / 020 3388 0019
Leeds / 0113 3566018
whittamcox.com

JOB NO. 200486
DRAWING NO. PL-06
REV A