

LANGSTONE PARK

Batch 1 signage

May 2021

Indent.




TOTEMS

A (4m)



B (4m)

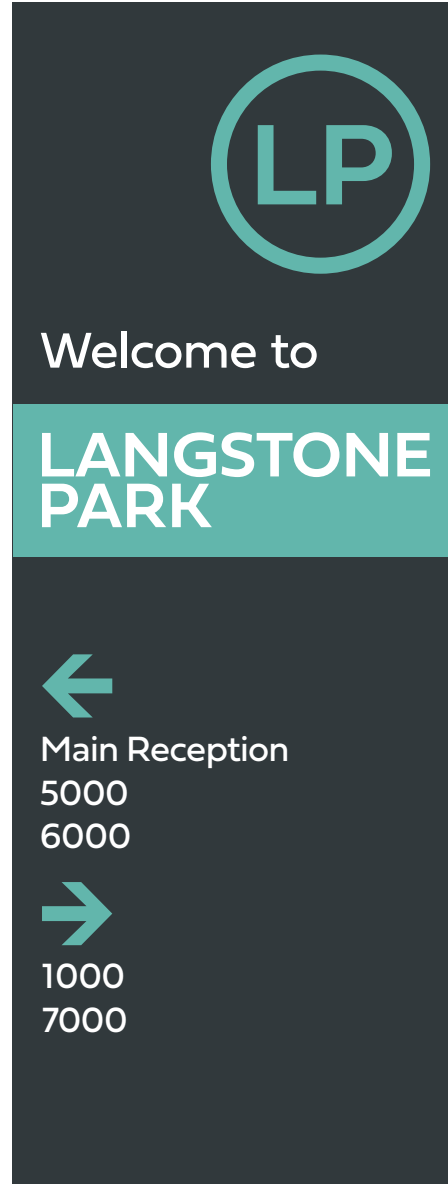

C (4m)



D (3m)



LETTING BOARD

M1 & M2



**LANGSTONE
PARK**

**ALL
ENQUIRIES**

**Lambert
Smith
Hampton**


01489 579 579



020 7493 4933

www.langstonepark.com

BUILDING 1000 NORTH FRONTAGE

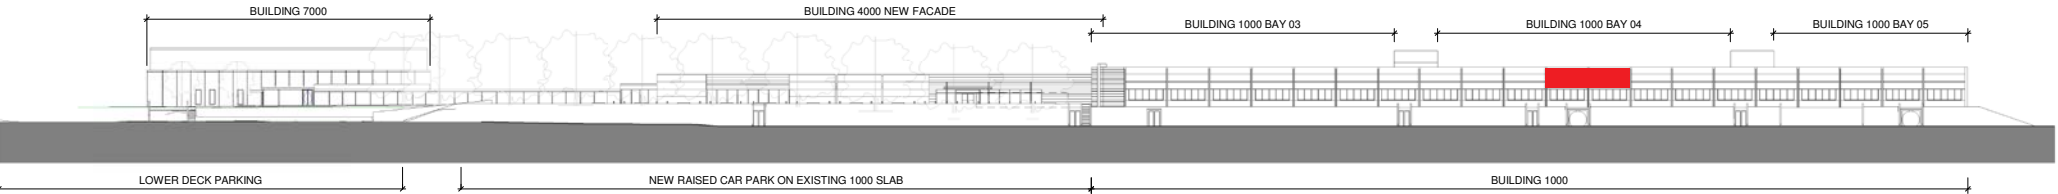




CGI: FLEX SIGN WITH ONLY LOGO AND LETTERS BACK LIT



CGI: FLEX SIGN WITH WHOLE FACE BACK LIT



SIGNAGE SURVEY + BATCH 1 SIGN POSITIONS

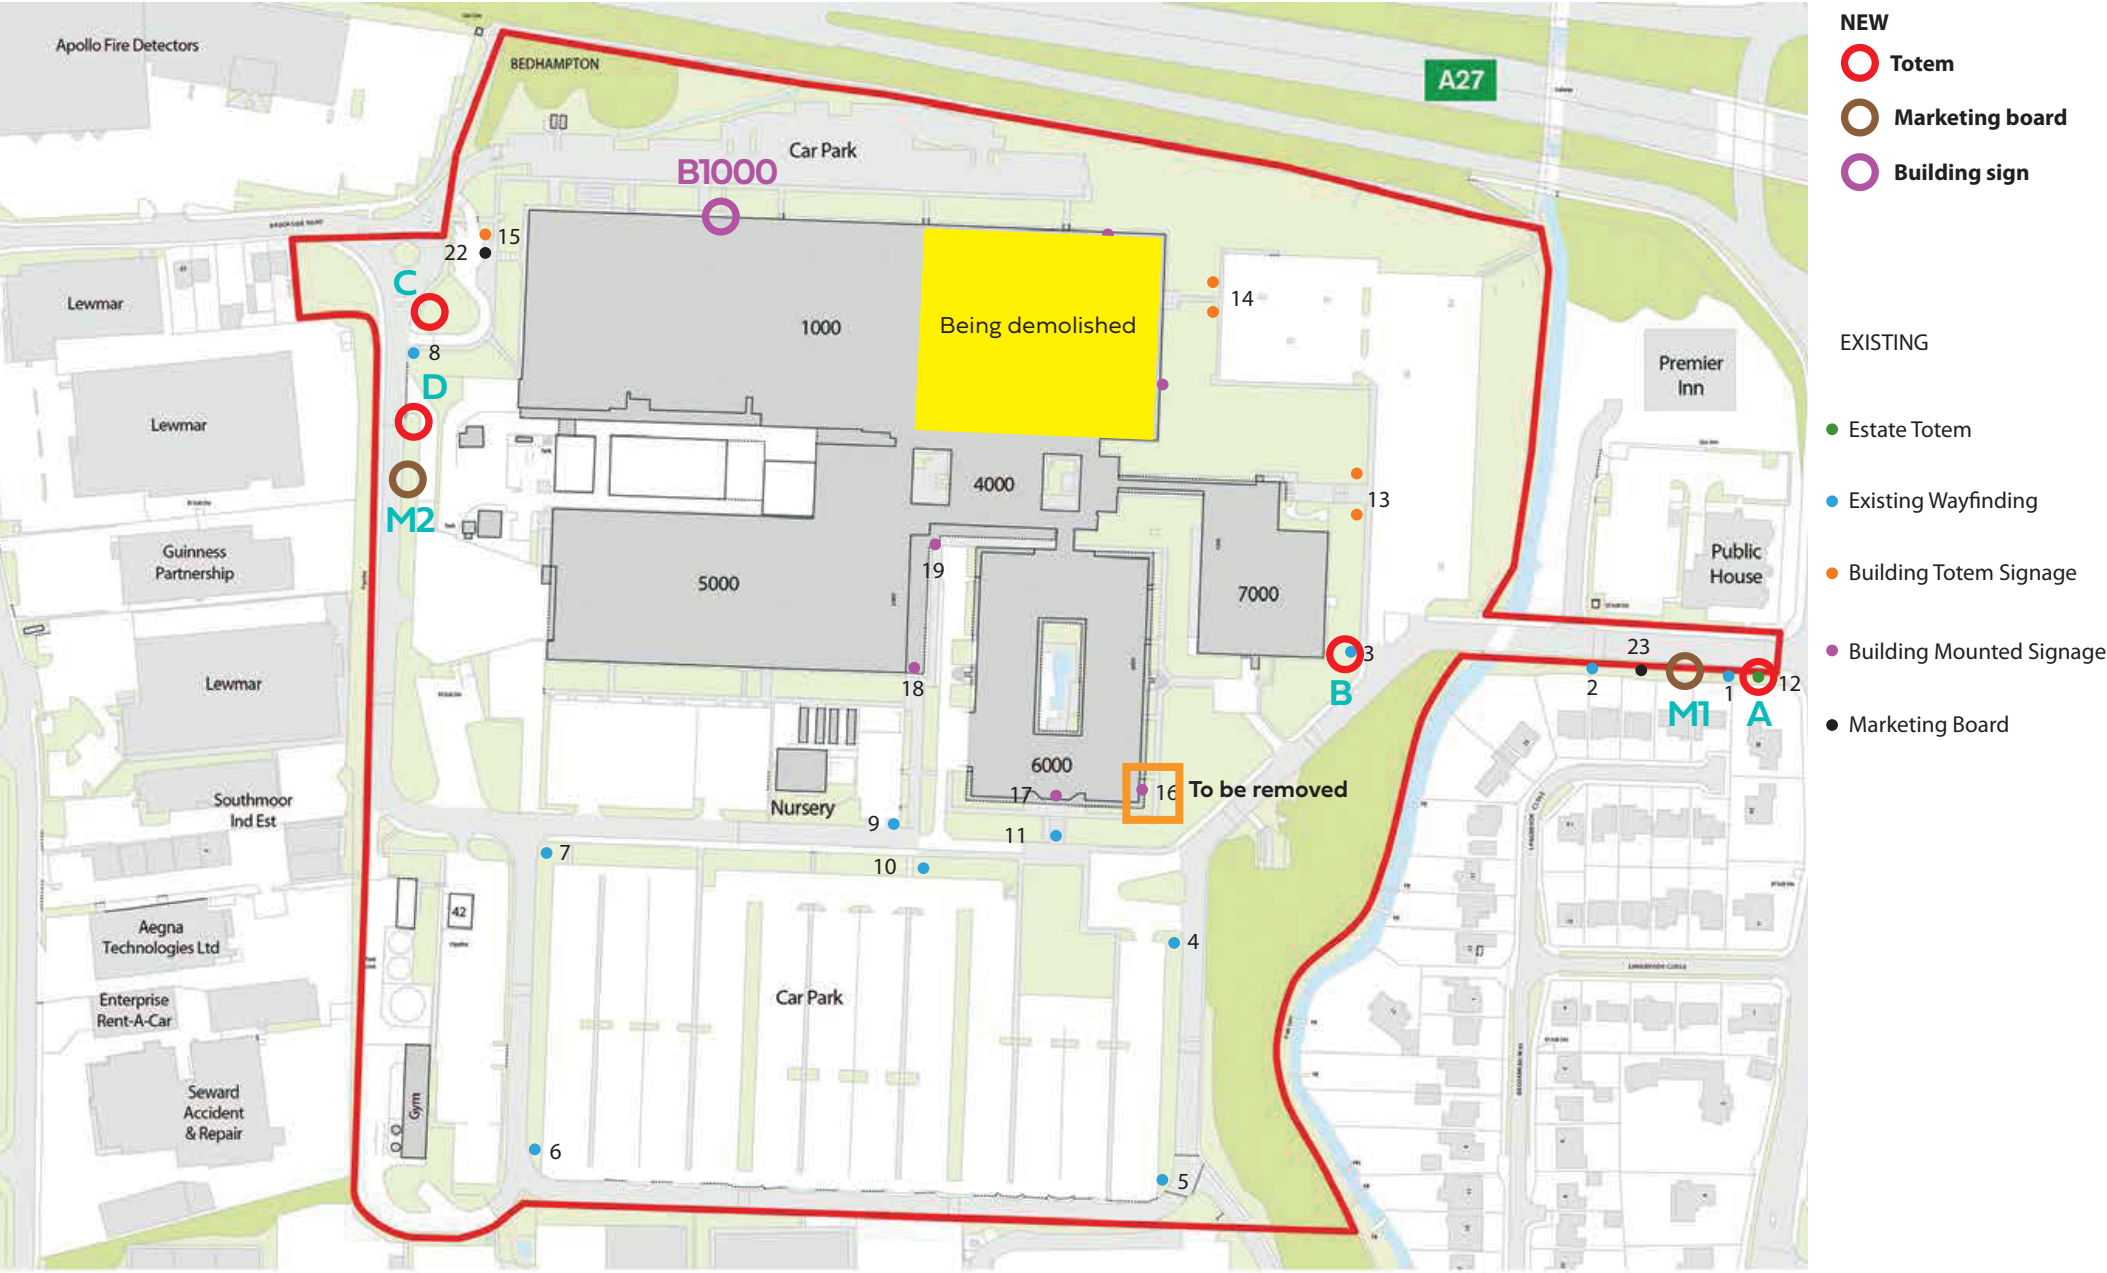



  LANGSTONE
PARK

A

LANGSTONE
PARK
OFFICES
LABORATORIES
WAREHOUSES

MI

LANGSTONE PARK





LANGSTONE
PARK



Goods inward
Loading bay



Parking

D



LANGSTONE
PARK
OFFICES
LABORATORIES
WAREHOUSES

M2

SIGNAGE BATCH 1 PRODUCTION ESTIMATE

MAIN ENTRANCE

Estate totem A

Internal mild steel frame with baseplates. Oxide coated and bolted down to a pre-formed concrete foundation.
3mm aluminium sign panels with folded inverted returns, finished to RAL colour and fitted to steel frame.
20mm detail logo finished to RAL colour bonded to sign face with VHB tape and face applied self adhesive vinyl detail
1500mm x 4000mm
Groundworks, waste and signage disposal, hiab and installation
£6200

New marketing board M1

Full colour digitally printed ACM panels. Fitted to white coated side mounted steel posts. Posts concreted into position. Inc installation
2440mm x 3000mm
£1400

Wayfinding totem B

Internal mild steel frame with baseplates. Oxide coated and bolted down to a pre-formed concrete foundation.
3mm aluminium sign panels with folded inverted returns, finished to RAL colour and fitted to steel frame.
20mm detail logo finished to RAL colour bonded to sign face with VHB tape and face applied self adhesive vinyl detail
1500mm x 4000mm
Groundworks, waste and signage disposal, hiab and installation
£6200

Building 6000

To remove and dispose of building 6000 logo
£720

Total £14520 plus VAT

HARTS FARM WAY

Estate Totem C

Internal mild steel frame with baseplates. Oxide coated and bolted down to a pre-formed concrete foundation.
3mm aluminium sign panels with folded inverted returns, finished to RAL colour and fitted to steel frame.
20mm detail logo finished to RAL colour bonded to sign face with VHB tape and face applied self adhesive vinyl detail
1500mm x 4000mm
Groundworks, waste and signage disposal, hiab and installation
£6200

New marketing board M2

Full colour digitally printed ACM panels. Fitted to white coated side mounted steel posts. Posts concreted into position. Incs installation
2440mm x 3000mm
£1400

Wayfinding totem D

Internal mild steel frame with baseplates. Oxide coated and bolted down to a pre-formed concrete foundation.
3mm aluminium sign panels with folded inverted returns, finished to RAL colour and fitted to steel frame.
20mm detail logo finished to RAL colour bonded to sign face with VHB tape and face applied self adhesive vinyl detail
1500mm x 3000mm
Groundworks, waste and signage disposal, hiab and installation
£5150

Building 1000 Flex specifciation illuminated

13160 x 3525
Powder coated extruded aluminum banner frame system fixed to building. Digitally printed liquid laminated pvc banner fixed to profile using tension clips. Inc installation

The P10 drawing shows the illuminated version.
Photographic examples follow


(Power supply would be client's responsibility to provide).

£13200


Total £25950 plus VAT

TOTAL BOTH ENTRANCES £40470 plus VAT


DO NOT SCALE
IF IN DOUBT ASK

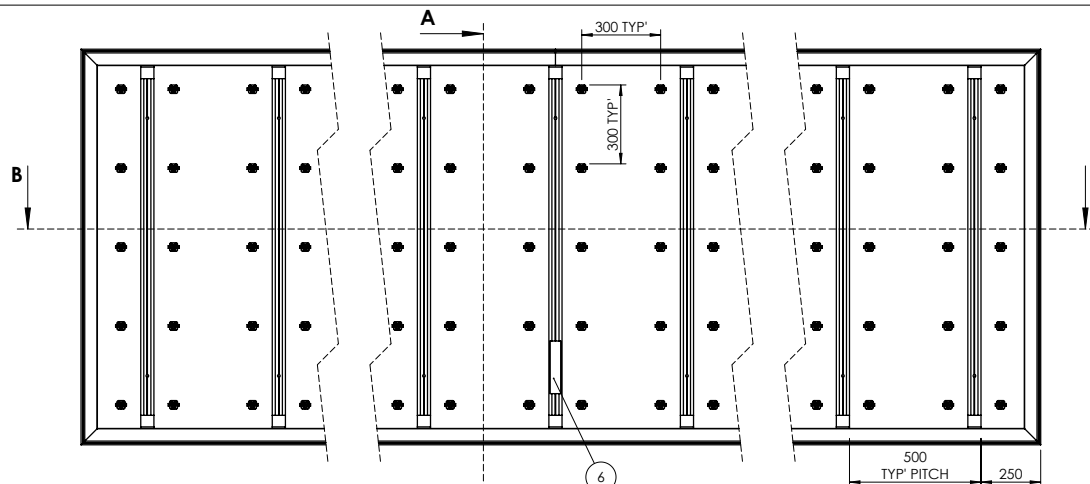


FRONT VIEW
(FACE MATERIAL REMOVED FOR CLARITY)
SCALE 1:20

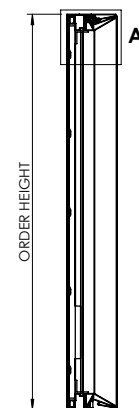


SECTION A-A

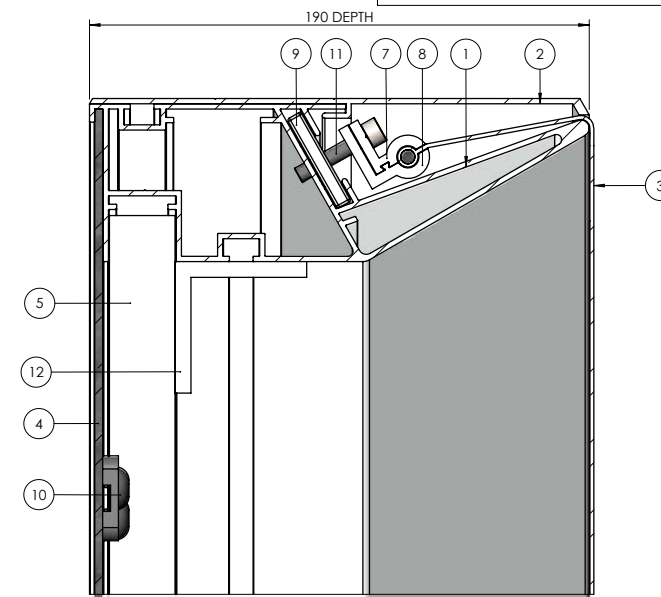


DETAIL A
SCALE 1:2

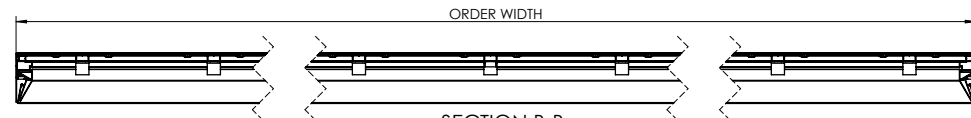


SECTION B-B

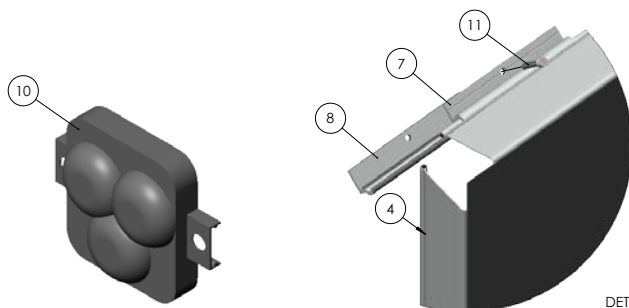

DETAIL B
SCALE 1:1

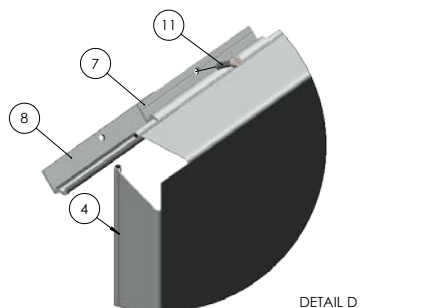


DETAIL D
SHOWING SLIDING SPLIT CLAMP
SCALE 1:2

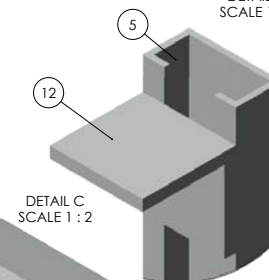

DETAIL C
SCALE 1:2

BILL OF MATERIALS SPRINGFLEX 190				
ITEM NO.	DRAWING No/REF	QTY	FINISH	NOTES
1	BODY SF2415M	1		
2	COVER SF1552	1		
3	FACE MATERIAL	1		C/W TENSION BAR
4	BACKPLATE	1		1-3mm THICKNESS RANGE
5	WALL BAR SF1577M	AS REQ'		500mm PITCH TYPICALLY
6	LED CONVERTER	1		
7	SPLIT CLAMP A	AS REQ'		TWO SIZES 150 & 295mm
8	SPLIT CLAMP B	AS REQ'		TWO SIZES 150 & 295mm
9	TENSION BAR	AS REQ'		
10	LED MODULE	AS REQ'		300mm GRID FORMATION
11	M6 TORX CAP SCREW	AS REQ'		
12	50x50x6 ANGLE	2 PER WALL BAR		

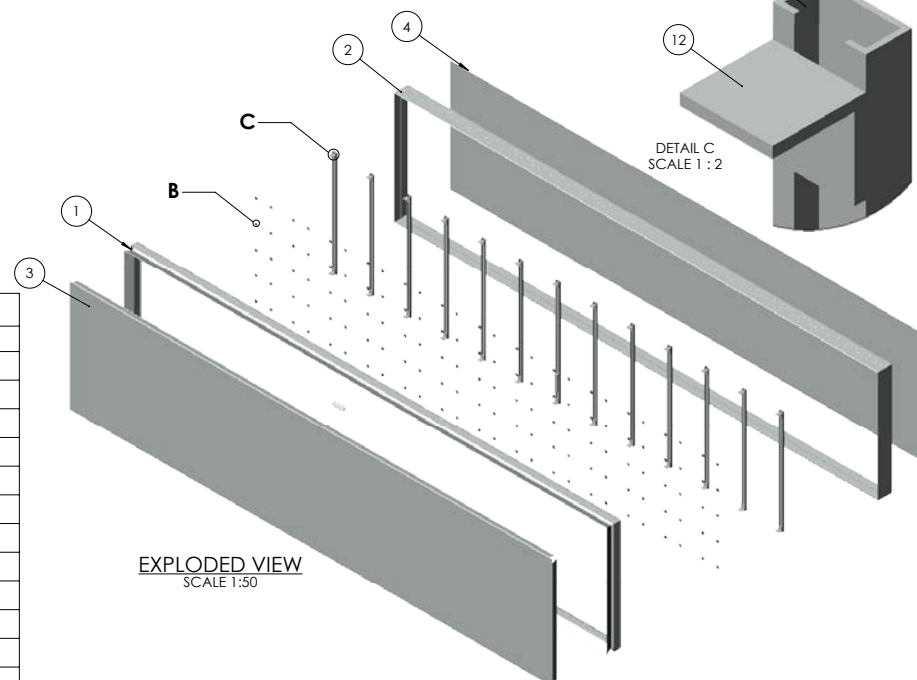

EXPLODED VIEW
SCALE 1:50

REV.	DATE	DESCRIPTION	BY
A	01-01-19	HD SLIDE CLAMP DETAIL D ADDED	R.L
THIS DRAWING IS THE PROPERTY OF ISUK LTD. AND MAY NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART OR FOR ANY OTHER PURPOSE THAN THAT FOR WHICH IT IS SUPPLIED.			
GENERAL TOLERANCES UNLESS OTHERWISE STATED 0 DECIMAL PLACES +/- 1mm 1 DECIMAL PLACES +/- 0.5mm 2 DECIMAL PLACES +/- 0.15mm ANGULAR DIMENSIONS +/- 1/2°			
DRAWING TITLE: SPRINGFLEX HD 190			
PRODUCT RANGE: SPRINGFLEX			
PROJECT No: IDS-236		DATE: 04-12-18	
PAPER: A3	DRAWN: R.L	CHKD: -	
SCALE: N.T.S	DWG No: IDS-236-005	REV: A	



INDENT
THANKS YOU



Indent Design Limited

2 Denmark Road
Reading RG1 5PA

0118 9861672