


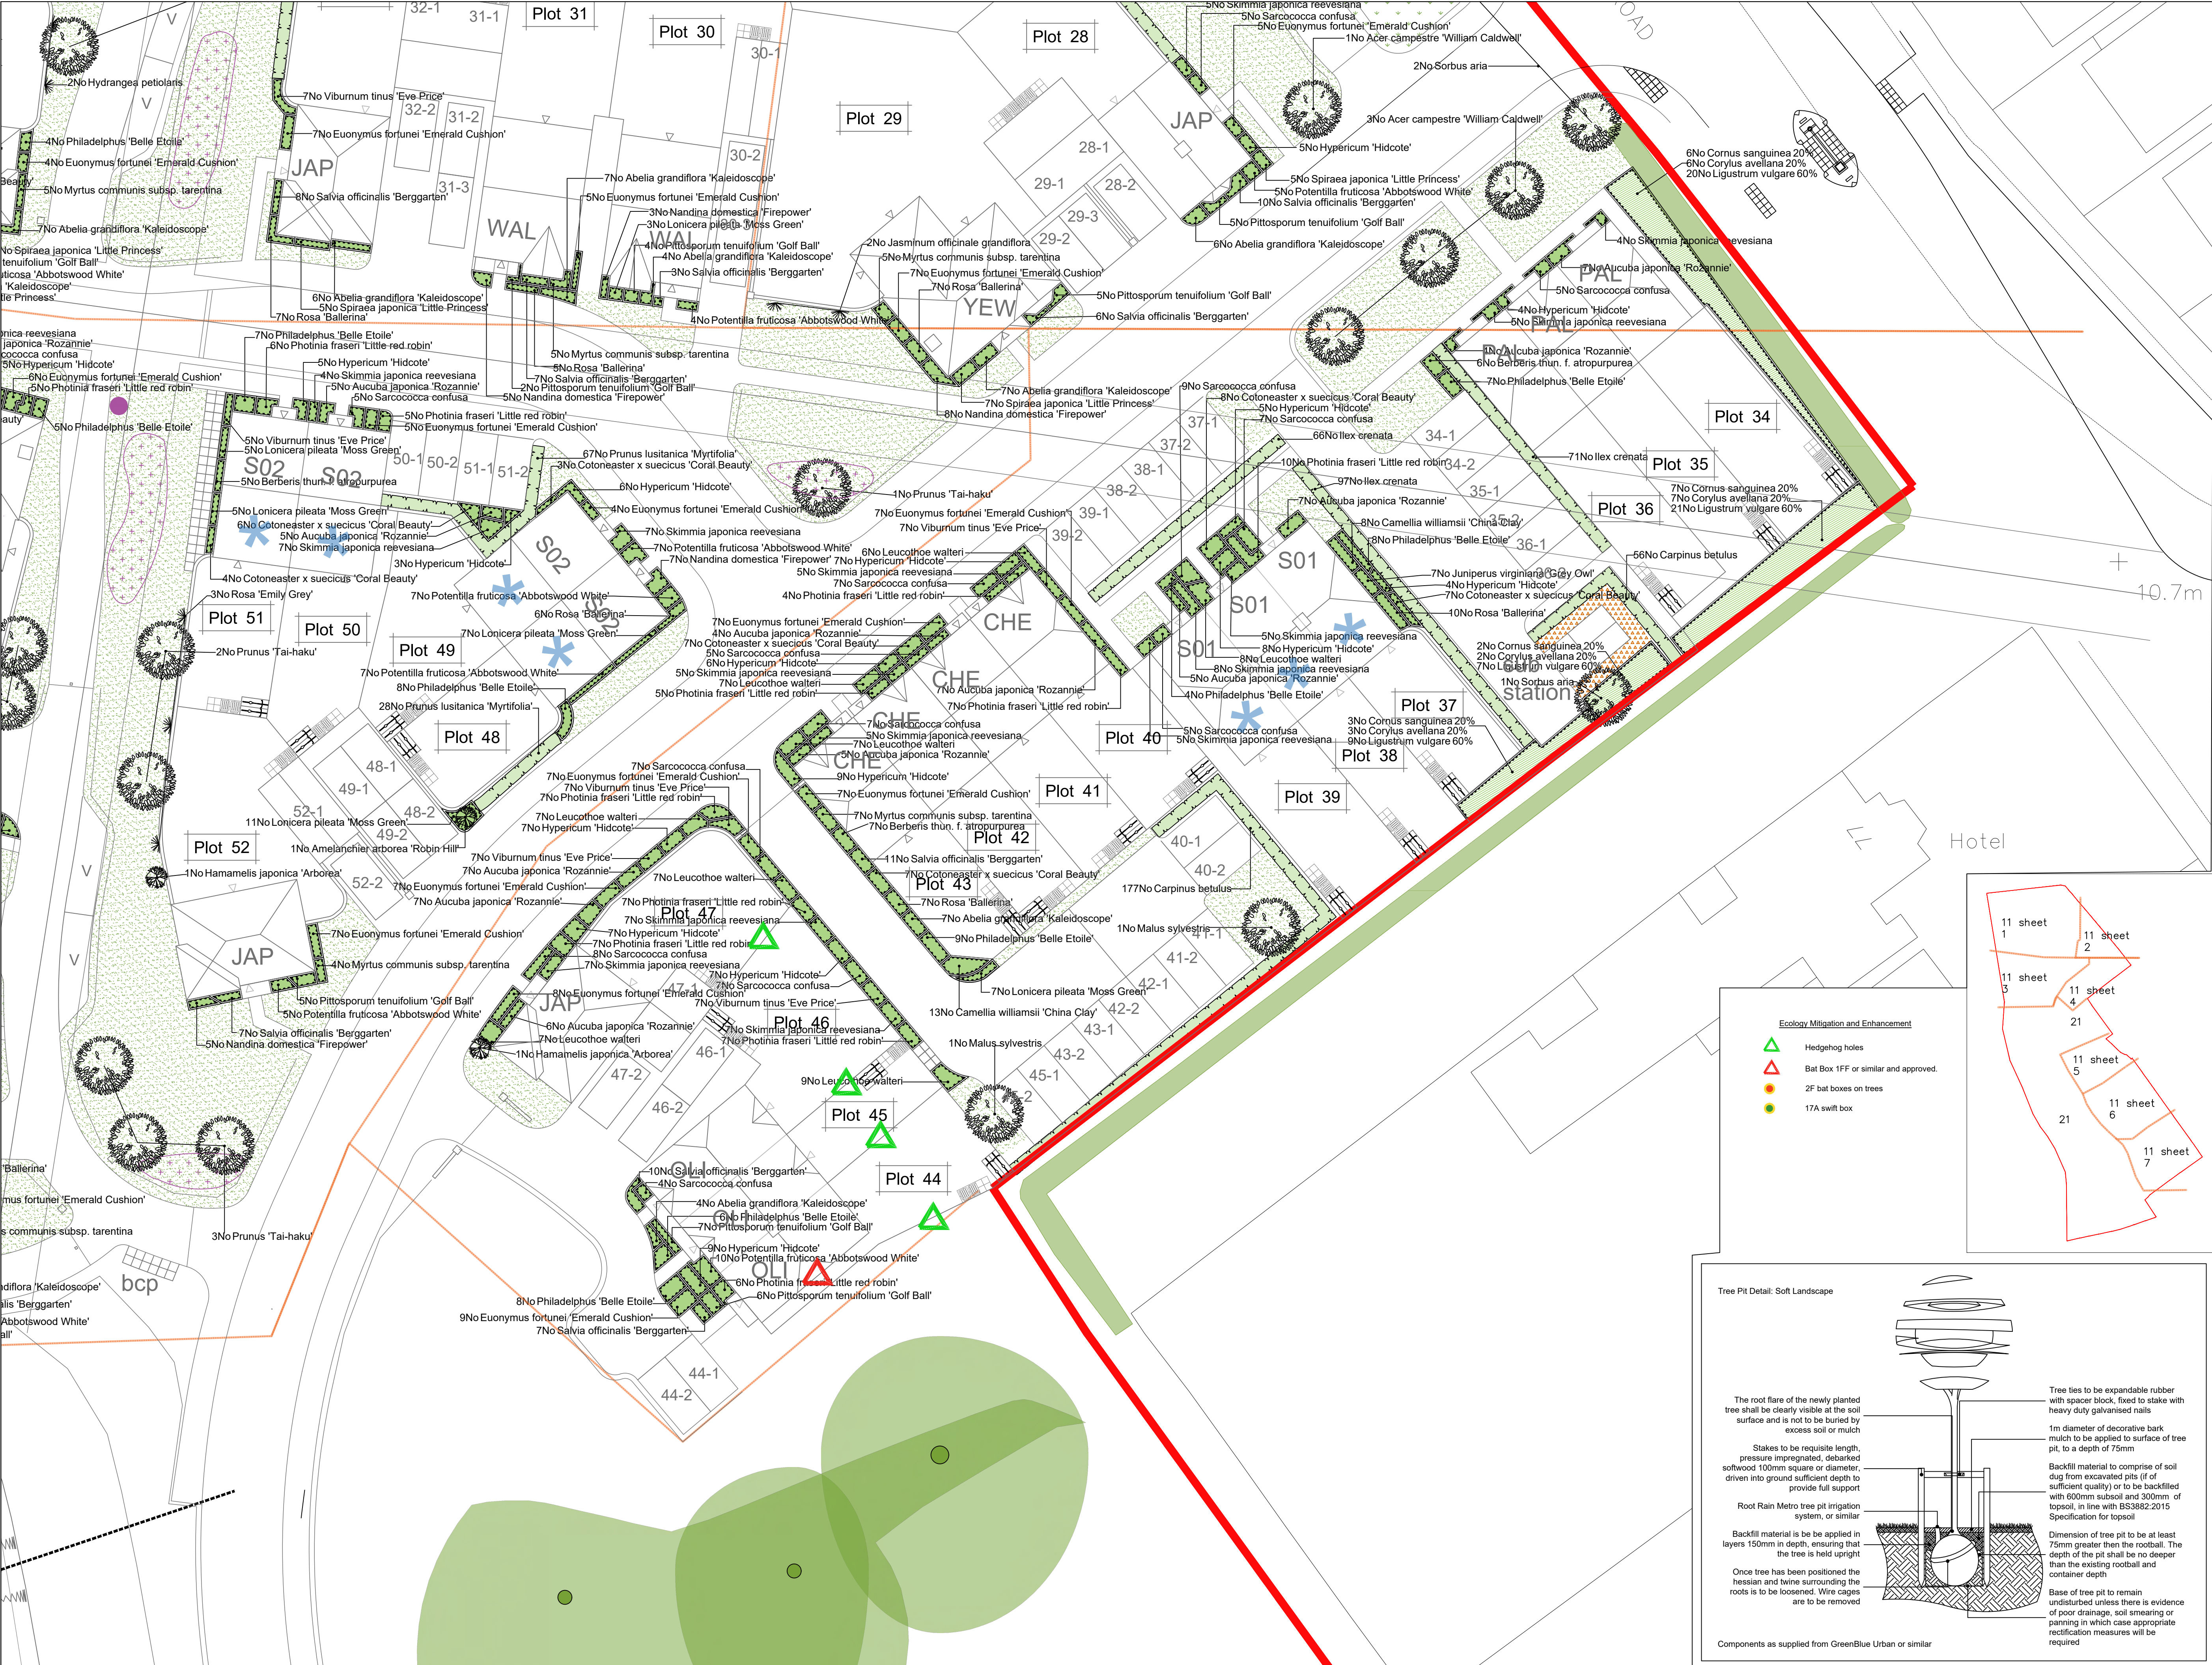

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTE: DO NOT SCALE FROM DRAWING

Legend

- Existing trees to be retained and protected during construction
- Proposed tree planting within soft landscape. See detail on sheet 4
- Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties. Irrigation tubing to root system of *Amelanchier*, *Laurus* and *Osmanthus* specimens as required
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed *Carpinus* (hornbeam) hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height
- Proposed mixed native hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height and 1.5m height adjacent to site boundaries
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed decorative mix shrub planting to be planted in groups of 5-7no. of each species and as above
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed grassland areas, to be seeded with EMG grass seed mix as supplied by Emorsgate and sown at 5 grams per msq, or similar and approved
- Tree root barrier, ReRoot 1000 from GreenBlue Urban or similar
- Proposed narrow areas of angular shippings for top dressing. Laid over a weed proof membrane.
- Proposed area to be planted with a bulb mix of fritillaria, galanthus, narcissus, allium
- Cycle route signage bollard indicating shared footpath and cycle route
- Cut lines

Planting Schedule on Sheet 2

Ecology Mitigation and Enhancement

- Hedgehog holes
- Bat Box 1FF or similar and approved.
- 2F bat boxes on trees
- 17A swift box

Tree Pit Detail: Soft Landscape

The root flare of the newly planted tree shall be clearly visible at the soil surface and is not to be buried by excess soil or mulch

Stakes to be requisite length, pressure impregnated, debarked softwood 100mm square or diameter, driven into ground sufficient depth to provide full support

Root Rain Metro tree pit irrigation system, or similar

Backfill material is to be applied in layers 150mm in depth, ensuring that the tree is held upright

Once tree has been positioned the hessian and twine surrounding the roots is to be loosened. Wire cages are to be removed

Tree ties to be expandable rubber with spacer block, fixed to stake with heavy duty galvanised nails

1m diameter of decorative bark mulch to be applied to surface of tree pit, to a depth of 75mm

Backfill material to comprise of soil dug from excavated pits (if of sufficient quality) or to be backfilled with 600mm subsoil and 300mm of topsoil, in line with BS3882:2015 Specification for topsoil

Dimension of tree pit to be at least 75mm greater than the rootball. The depth of the pit shall be no deeper than the existing rootball and container depth

Base of tree pit to remain undisturbed unless there is evidence of poor drainage, soil smearing or panning in which case appropriate rectification measures will be required

Components as supplied from GreenBlue Urban or similar

11 sheet 1

11 sheet 2

11 sheet 3

11 sheet 4

11 sheet 5

11 sheet 6

11 sheet 7

E	02.06.21	Eco mitigation updated	JH
D	21.8.18	Comments	LS
C	7.8.17	Revised planting	LS
B	4.8.17	Updated Layout	LS
A	7.7.17	Updated Layout	LS
Rev	Date	Details	Drawn

ACD ENVIRONMENTAL

HEAD OFFICE
Rodbourse Rail Business Centre, Grange Lane,
Malmesbury, SN16 0ES
Tel: 01666 825646

Courtyard House, Mill Lane, Codralling, GU7 1EY
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 9SX
Tel: 02382 026300

9 Brownlow Road, Cambridge, CB4 3NG
Tel: 07825 868654

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

Bellway

scheme: Horndean Road Emsworth

client: Bellway Wessex

drawing: Landscape Proposals


date: March 2017

scale: 1:200@A1

drawing no: BELL21129 11E - sheet 4

drawn: LS checked: AE

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2011. Copyright of this plan remains with ACD until all fees have been paid in full.

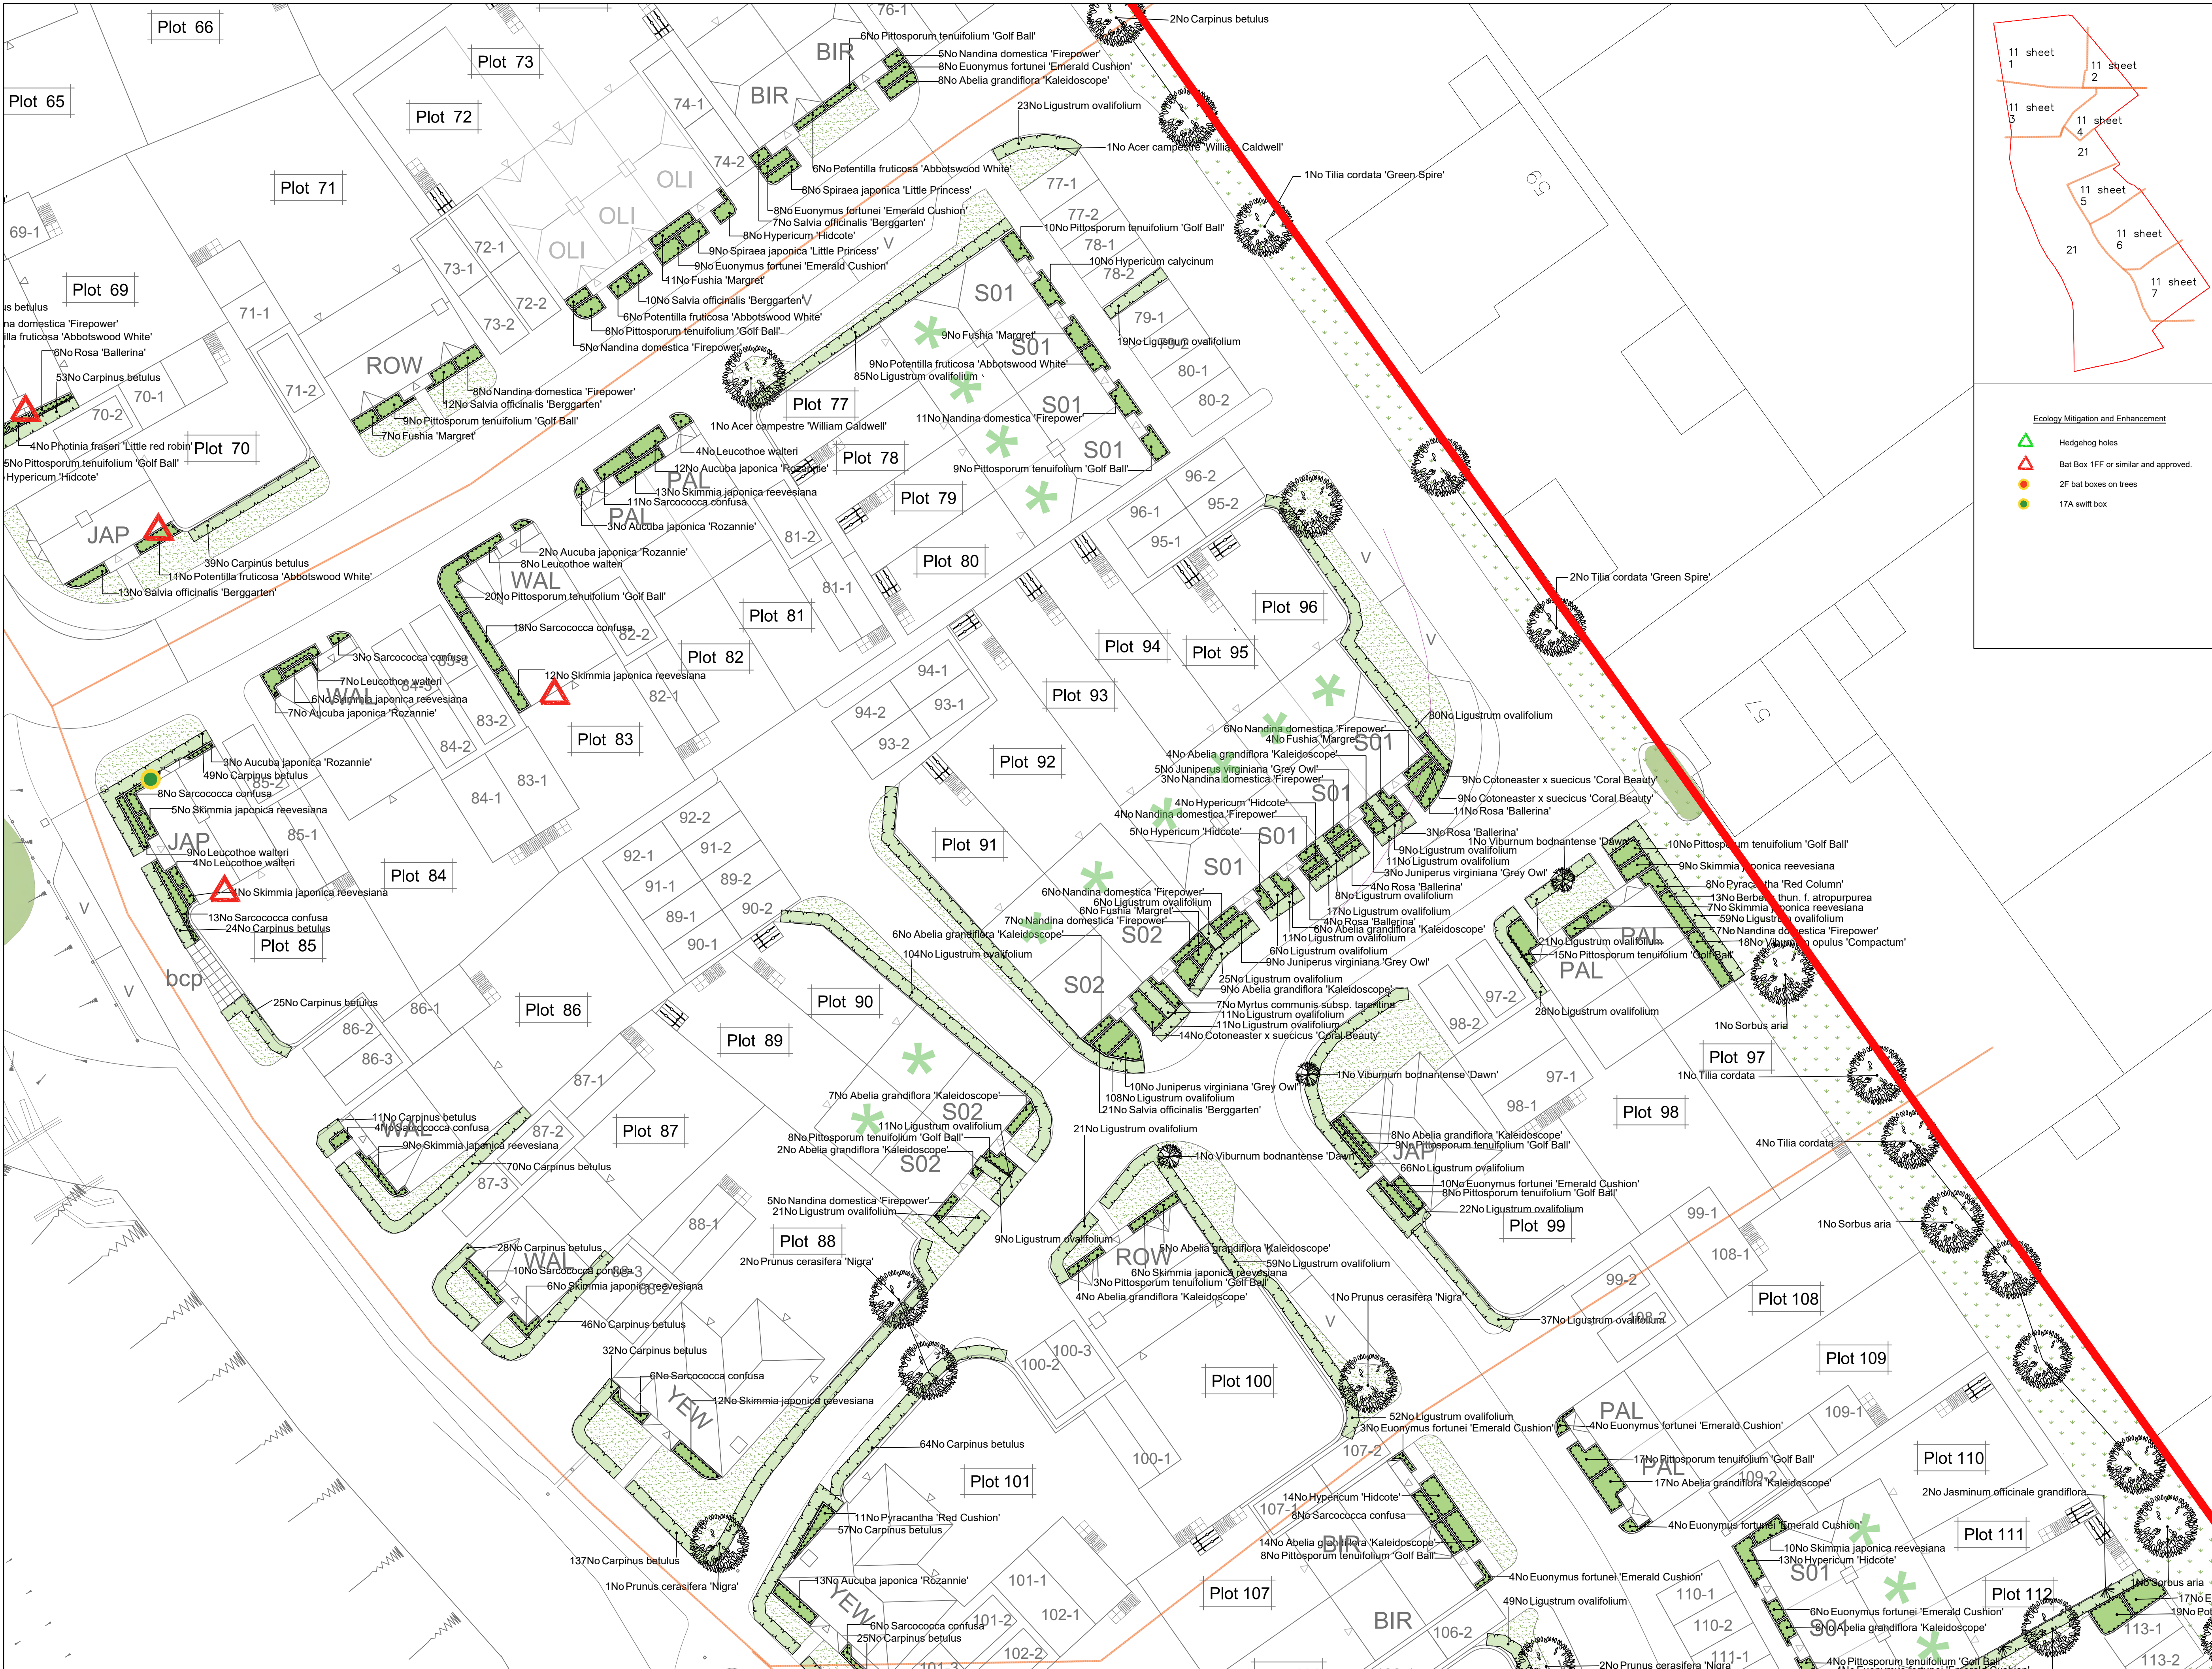

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTE: DO NOT SCALE FROM DRAWING

Legend

- Existing trees to be retained and protected during construction
- Proposed tree planting within soft landscape. See detail on sheet 4
- Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties. Irrigation tubing to root system of *Amelanchier*, *Laurus* and *Osmanthus* specimens as required
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed *Carpinus* (hornbeam) hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height
- Proposed mixed native hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height and 1.5m height adjacent to site boundaries
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed decorative mix shrub planting to be planted in groups of 5-7no. of each species and as above
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed grassland areas, to be seeded with EM grass seed mix as supplied by Emorsgate and sown at 5 grams per msq, or similar and approved
- Tree root barrier, ReRoot 1000 from GreenBlue Urban or similar
- Proposed narrow areas of angular shippings for top dressing. Laid over a weed proof membrane.
- Proposed area to be planted with a bulb mix of fritillaria, galanthus, narcissus, allium
- Cycle route signage bollard indicating shared footpath and cycle route
- Cut lines

Ecology Mitigation and Enhancement

- Hedgehog holes
- Bat Box 1FF or similar and approved.
- 2F bat boxes on trees
- 17A swift box

Planting Schedule on Sheet 2

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200

E	02.06.21	Eco mitigation updated	JH
D	21.8.18	Comments	LS
C	7.8.17	Revised planting	LS
B	4.8.17	Updated Layout	LS
A	7.7.17	Updated Layout	LS
Rev	Date	Details	Drawn

ACD ENVIRONMENTAL

HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane,
Malmesbury, SN16 0ES
Tel: 01666 825646

Courtyard House, Mill Lane, Codrington, GU7 1EY
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 9SX
Tel: 02382 026300

9 Brownlow Road, Cambridge, CB4 3NG
Tel: 07825 868654

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

Bellway

scheme: Horndean Road
Emsworth

client: Bellway Wessex

drawing: Landscape Proposals

date: March 2017

scale: 1:200@A1

drawing no: BELL21129 11E - sheet 6

drawn: LS checked: AE

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2011. Copyright of this plan remains with ACD until all fees have been paid in full.