
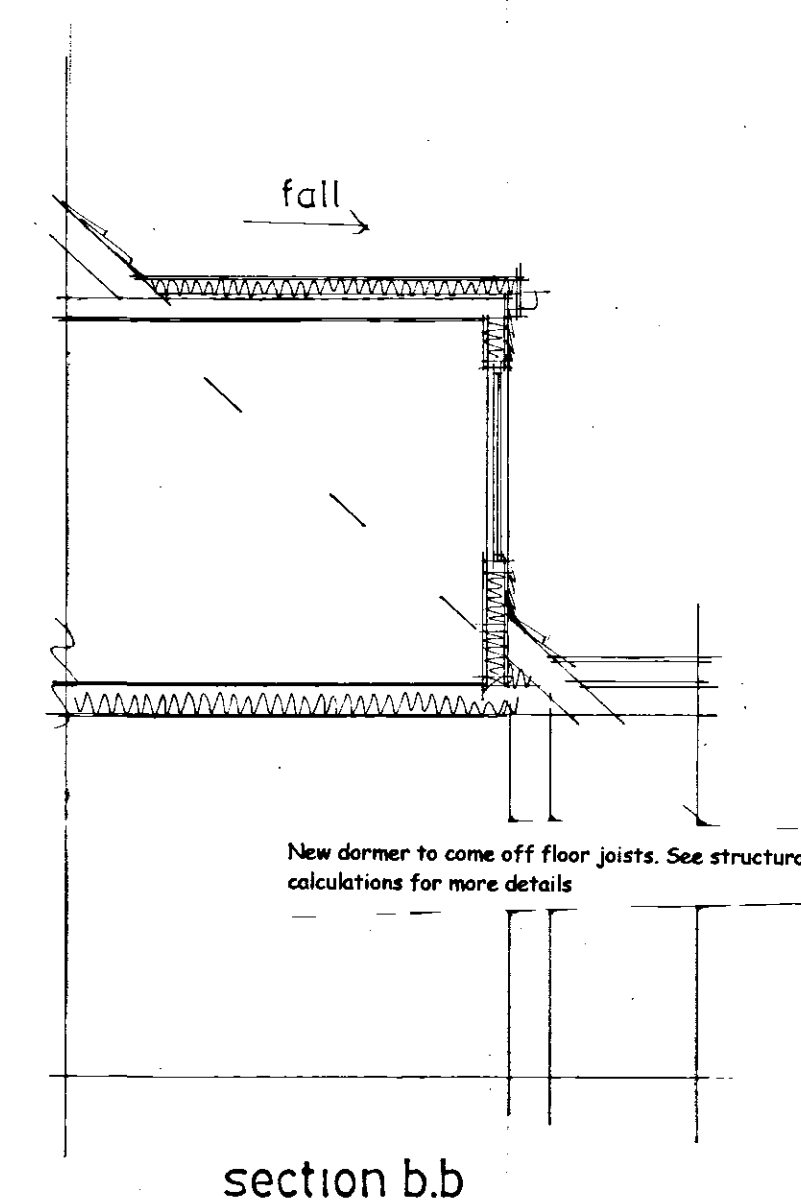
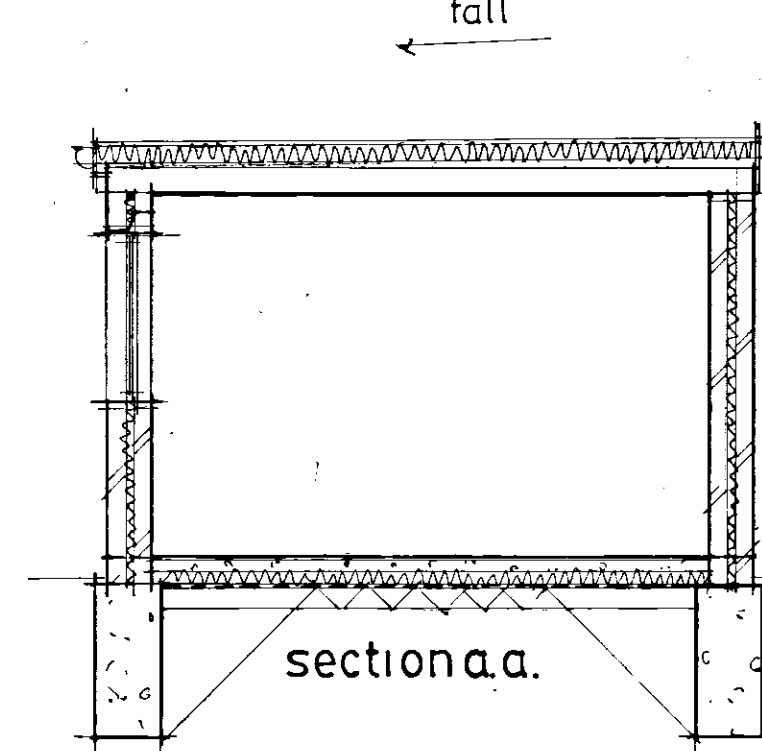
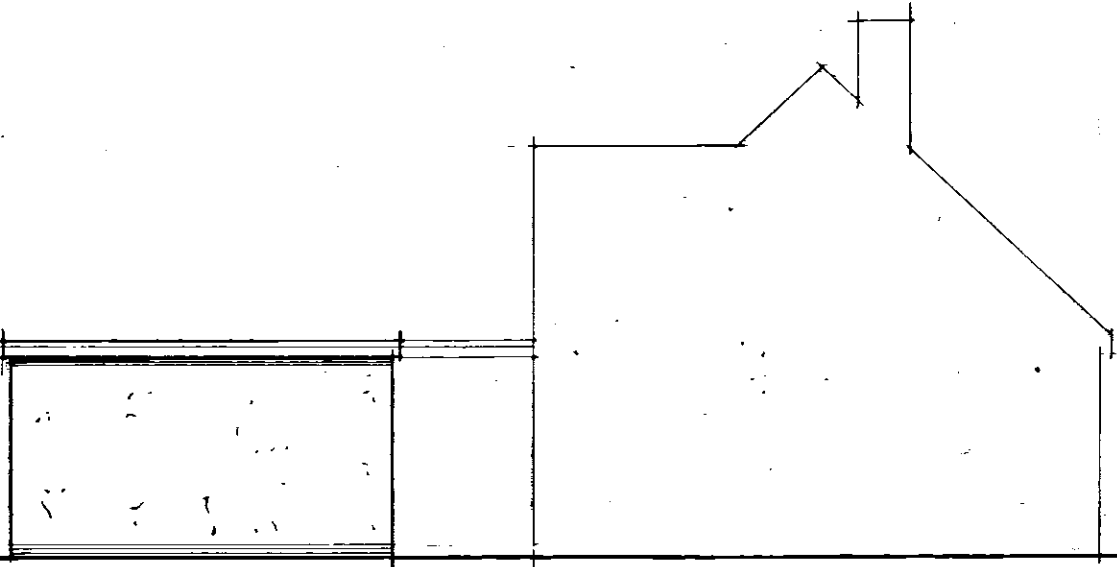
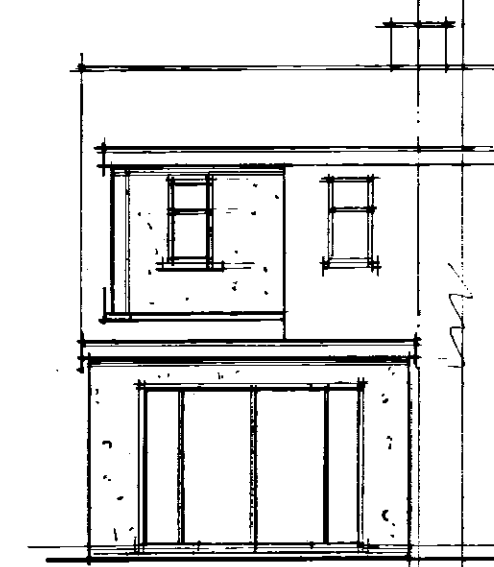
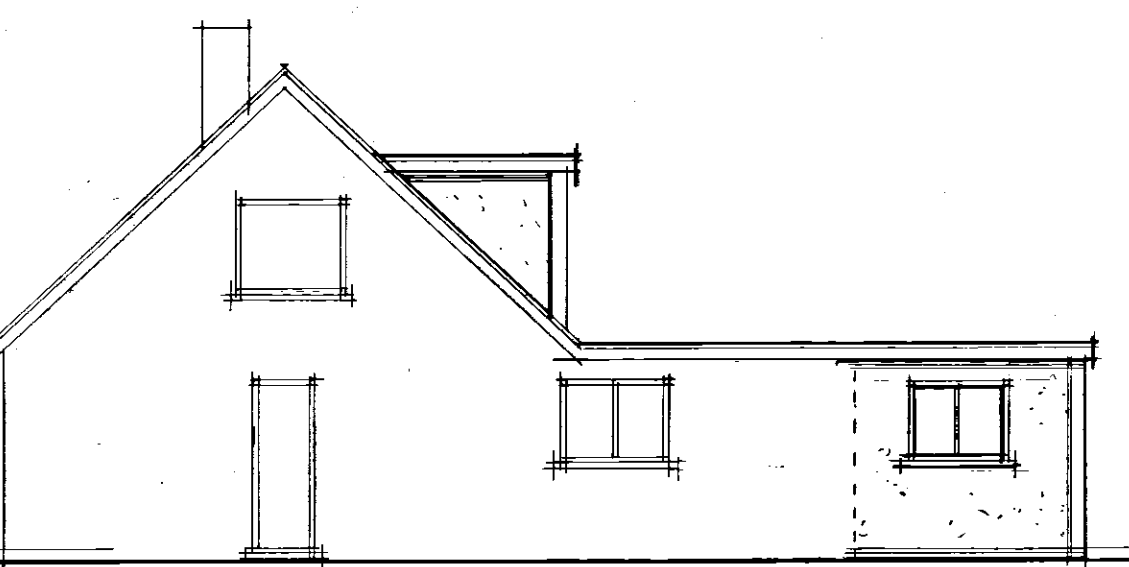
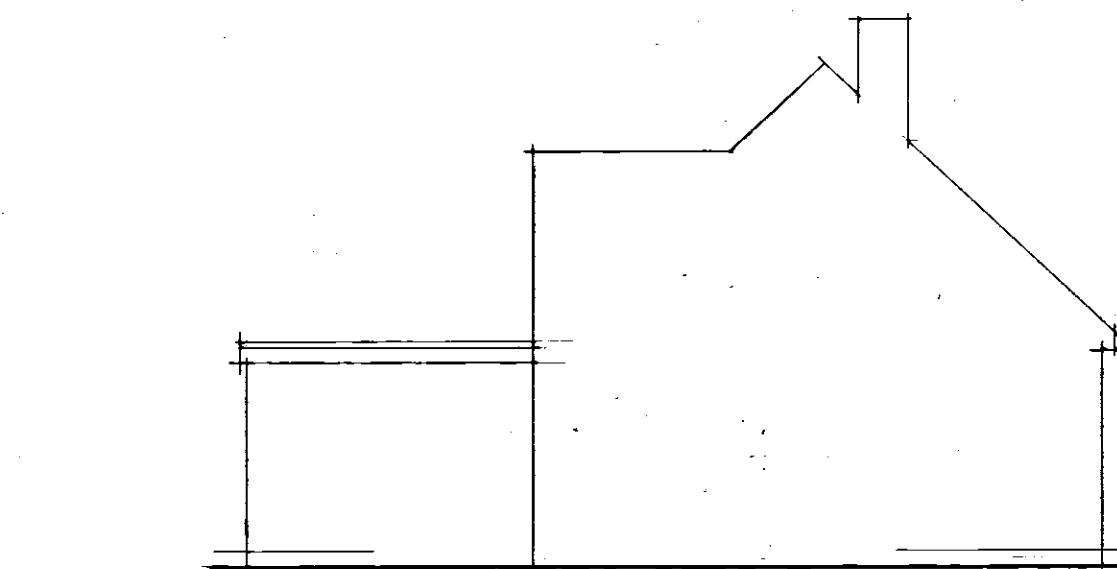
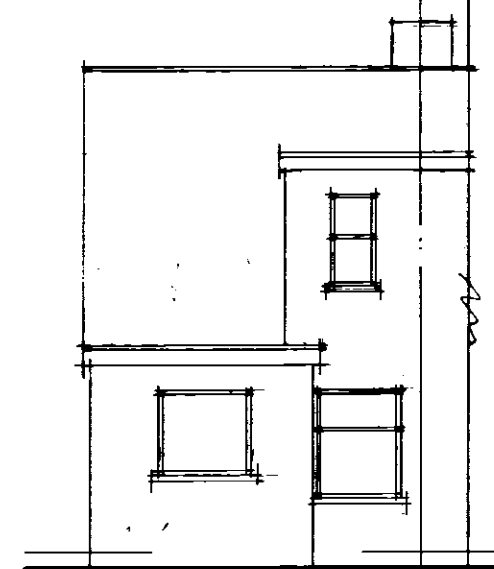
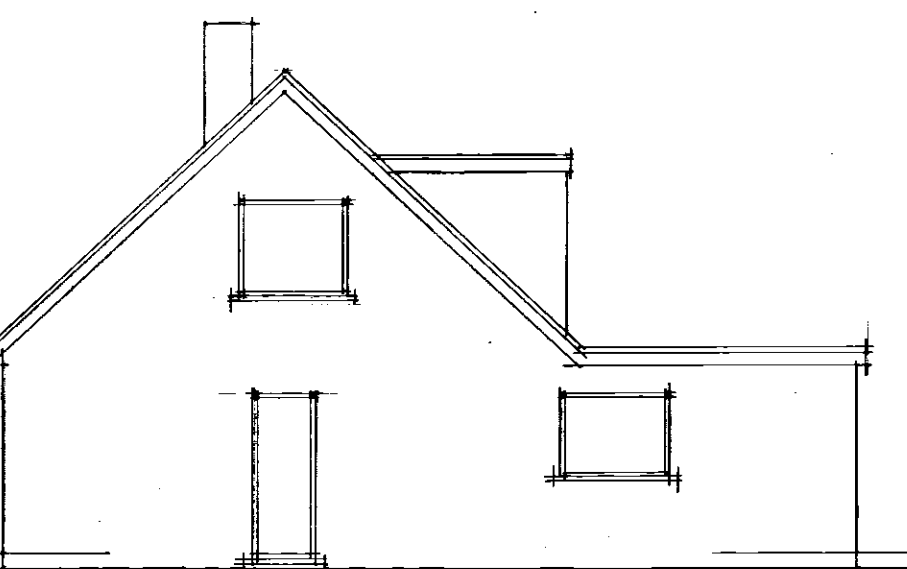
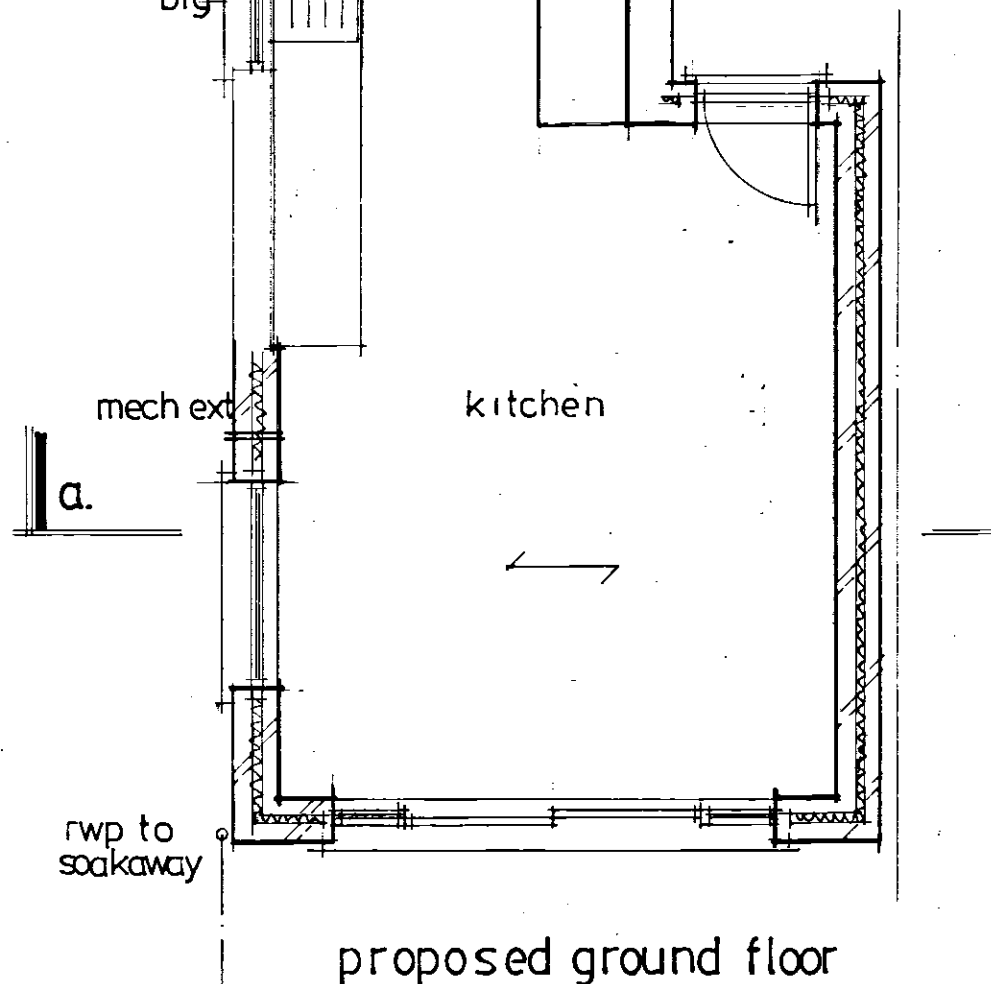
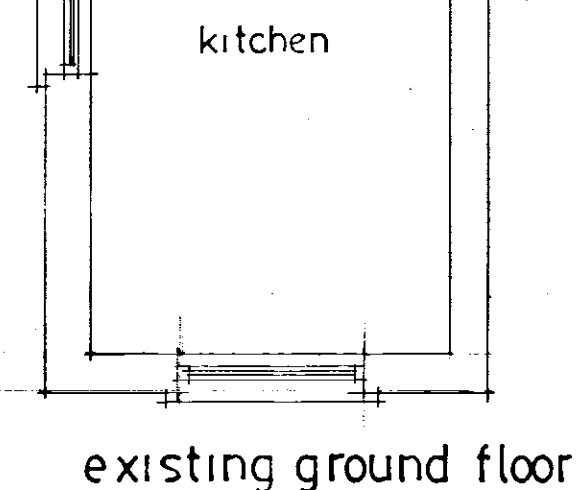
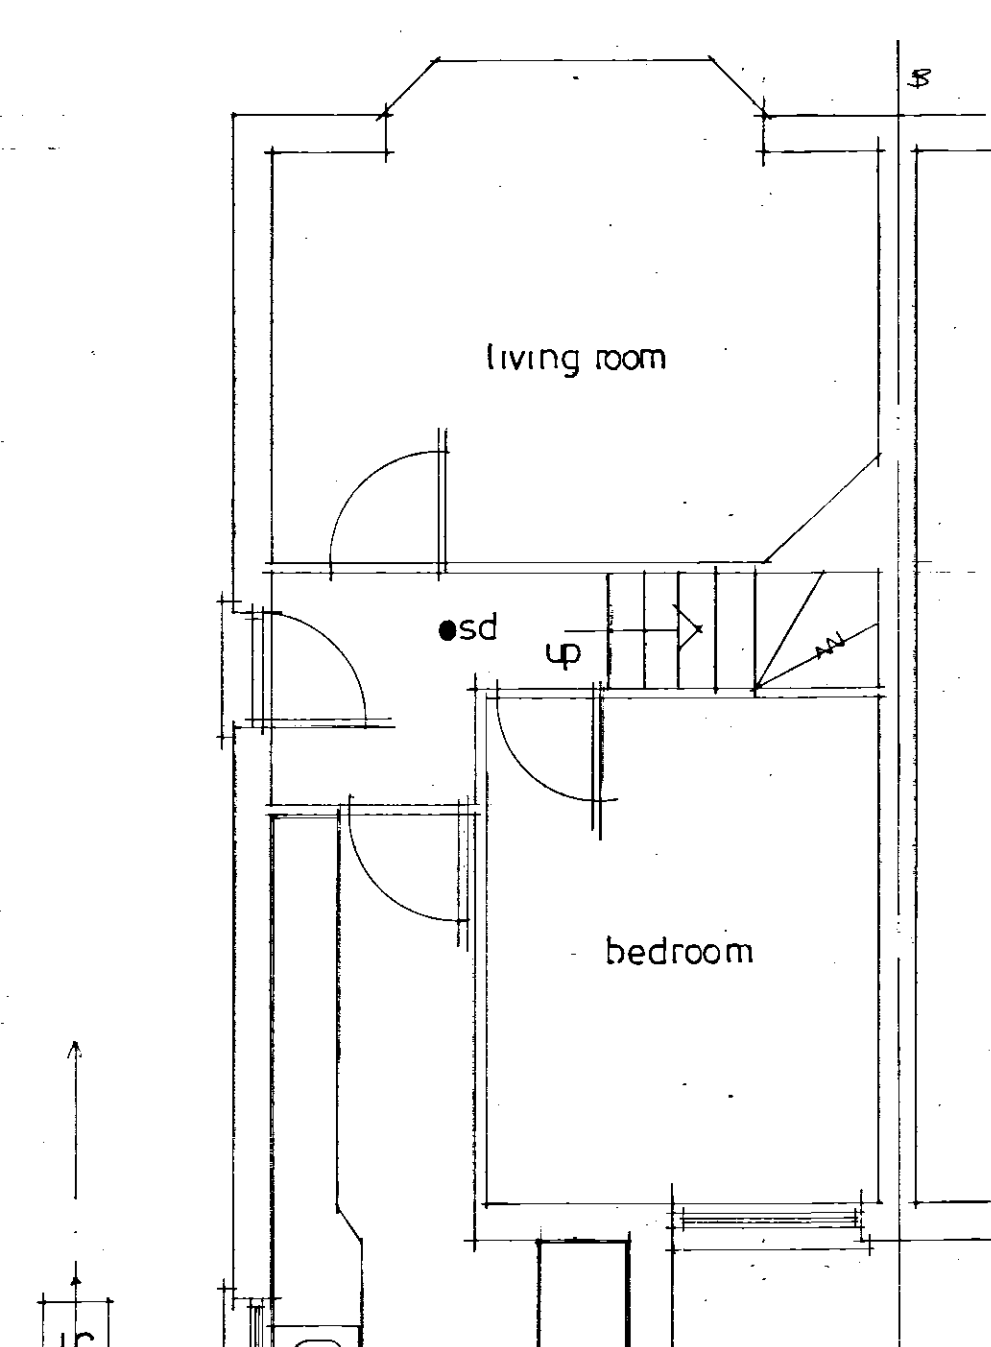


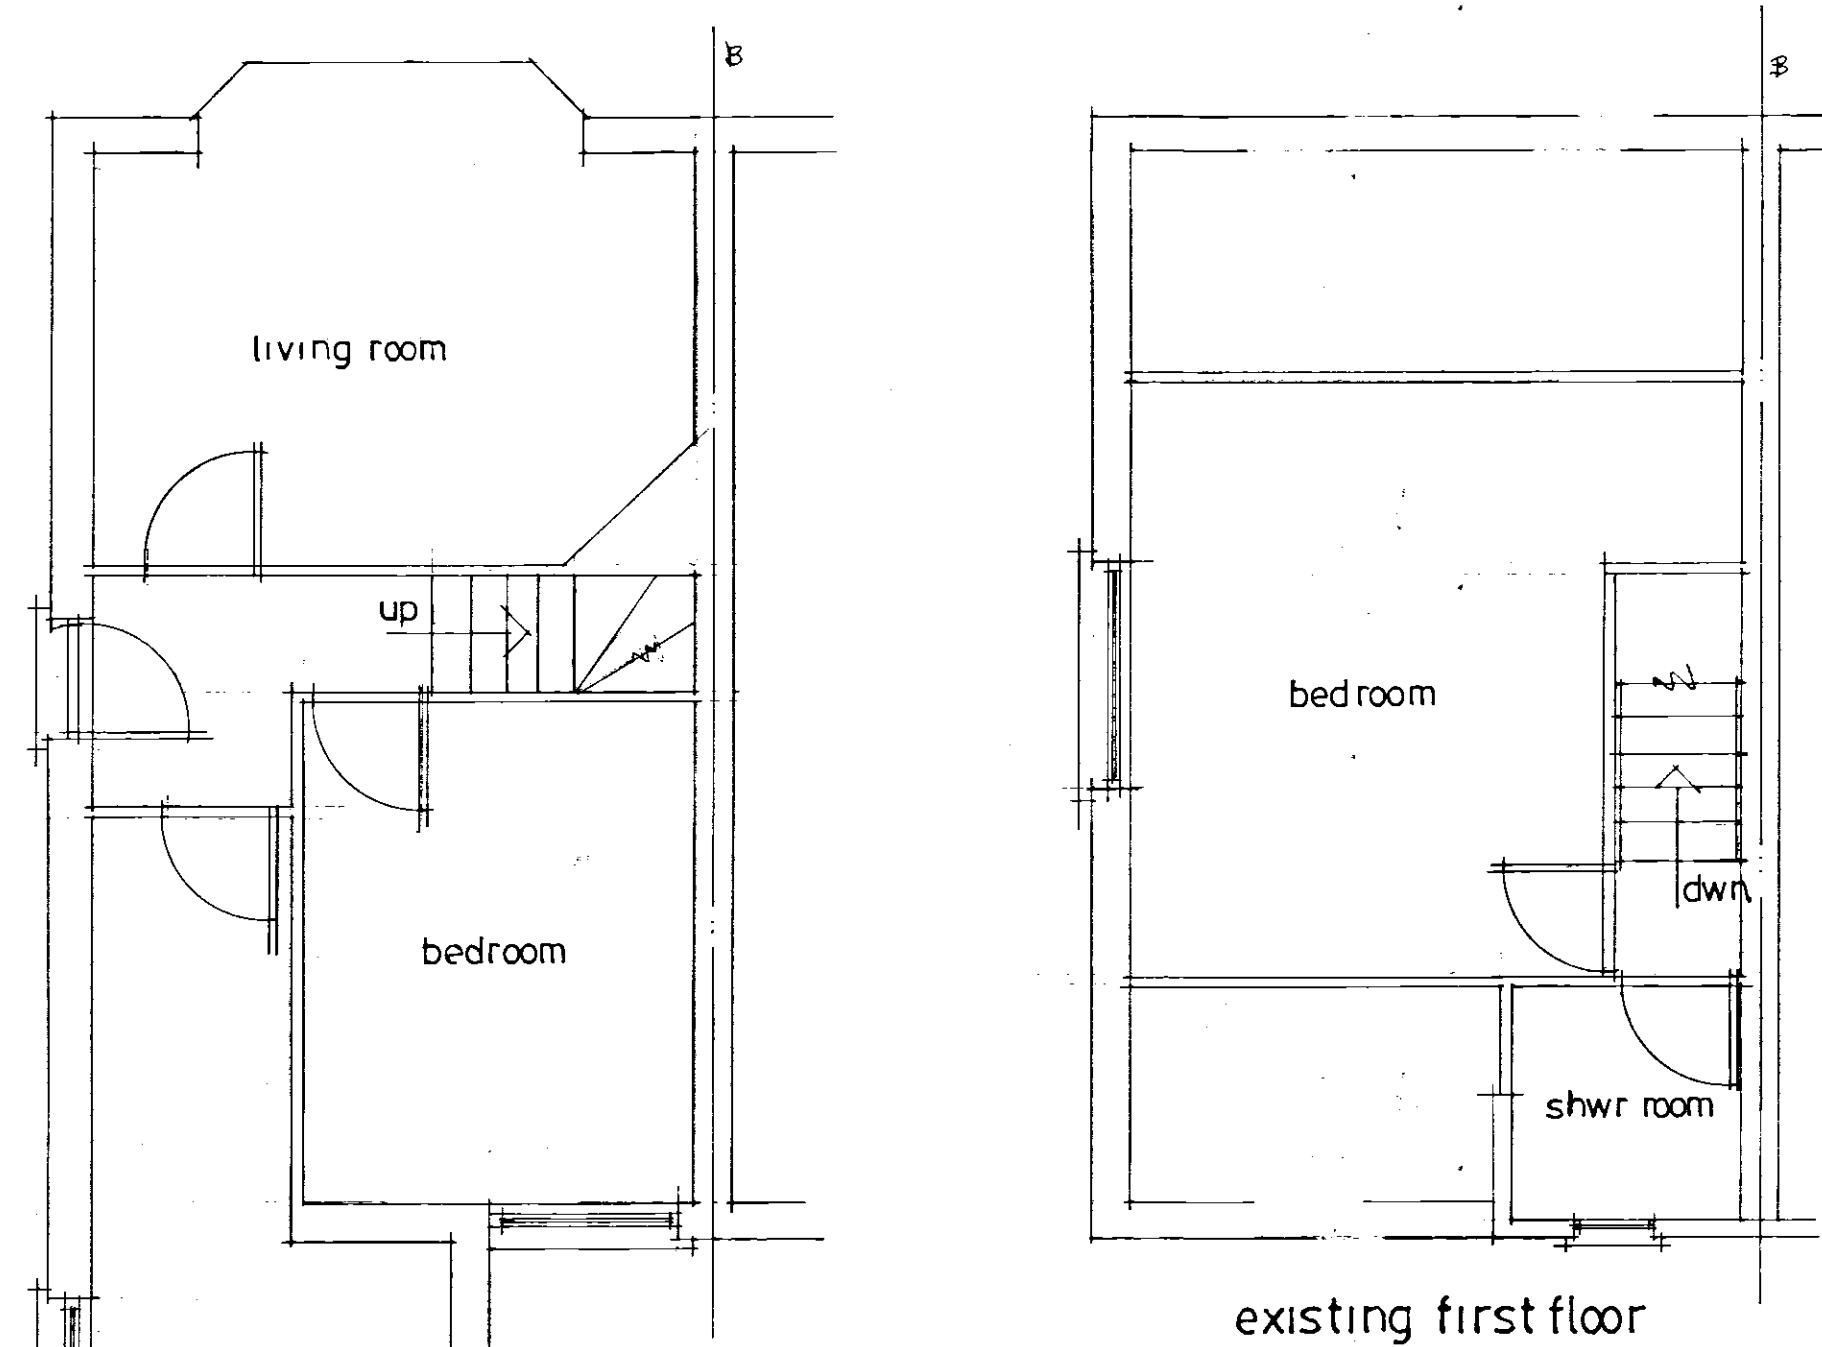

Opening window areas to be minimum 1/20th of enclosed floor areas. All new windows to be fitted with minimum 8000sqmm trickle vents per room. Maximum area of double glazed window not to exceed 20% of floor areas.

New windows: new double glazed windows to have minimum U value of 1.6w/m²k. Doors to have a min U value of 1.80w/m²k. Toughened glass in glazed doors and windows in critical locations, i.e.: alongside doors. Seal around window-wall joint with mastic sealant. Double rafters as roof light trimmers if applicable.

Minimum full opening size of escape window 0.33sqm. min clear dimension of edge 450mm with sill below 1.10m from floor and above 800mm.

Fit mechanical extract fan from kitchen rated at min 60lit/sec. If cooker hood installed, to be rated at 45lit/sec. Utility room if applicable to be rated at 30lit/sec.

Dormer walls: 2 coat waterproof render on chicken wire on battens on roofing felt on 12.5mm external ply on 100x50mm studwork with Celotex GA4070 batts between studs, flush with outer face of studwork and Celotex TB4012 across inner face of studs, tape and mastic joints. 12.5mm foilbacked plasterboard and set internally. Fit 6mm masterboard within dormer cheeks where within 1m of boundary.

Dormer warm flat roof: Three layer built up felt to BS747 cp144 pt3 on Celotex TD4126 decking on firings and 50mm x 170mm joists at 400mm ctrs. 12.5mm foil back plasterboard ceiling. Seal warm roof from existing vented roof space at join if applicable.

Foundation concrete trench fill, 450mm wide to min depth of 1 metre or to suit local ground conditions. (in clay soils min depth 1.2 metres) or to below invert level. Floor 50mm screed on 100mm concrete slab on Celotex GA4070 insulation batts on 1,200G damp proof membrane continuous with new and existing damp proof course, on minimum 100mm well consolidated hardcore with 50mm sand blinding. Fit 100mm diam pvc ducts under slab terminating in 225x75mm airbricks to vent existing timber subfloors when required.

External walls: two skins 100mm lightweight concrete blockwork (Calson Solar, Thermatite Turbo or similar rated) 100mm rockwall batt filled cavity. Render and set internal, two coat render external. Insulated 'carnic' lintols over new openings, tooth into existing walls and maintain all cavities. Close cavities at eaves with non-combustible material. Wall ties to be at 900mm ctrs vertically and 450mm ctrs horizontally and staggered. 'carnic' or similar vertical cavity thermal closers at openings. External perimeter of door and window openings to be sealed with a suitable airtight sealant.

Flat roof, 13mm spar chippings on 3 layer high performance torch on felt to BS747 cp144 part 3 1977 on Celotex TD4126 insulated roof decking on firings on 50mm x 170mm roof joists at 400mm centres. 12.5mm foil back plaster board ceiling. Strap down new roof with 1000 x 32mm galvanised mild steel straps at 1200mm centres. Ensure that wall insulation is taken up to meet underside of Celotex to ensure warm roof construction.

Drainage all drainage to BS EN752 plus approved doc H 100mm diam. PVC drain ware minimum fall 1:40 in 150mm concrete surround to new or existing inspection chamber on existing run. Bridge with concrete lintols over where passing beneath new walls and flexible packing surround. Exact position, invert and direction of all existing drains to be determined and agreed on site PRIOR to commencement of works.

Plumbing all to BS EN 2056 plus approved doc H 38mm diam. wastes from sink, bath and shower. 32mm diam. Waste from wash hand basins, all with rodding access on changes of direction and with deep seal traps. Run to existing/new 100mm diam pvc svp terminating min 900mm above nearest window head and with rodding access at the base.

Rain water goods: run new 100mm diam pvc rain water guttering and 70mm diam downpipes to 1.0cu.m. soakaways formed min 5m from building via big and 100mm diam drainage.

Rain water goods: run new 100mm diam pvc rain water guttering and 70mm diam downpipes to existing drainage system.

All new electrical works to be designed, installed, inspected and tested in accordance with BS7671 (IEE:17th Ed) the works are to be undertaken by an installer registered under a suitable self certification scheme or by a suitably qualified person with a certificate of compliance produced to building control upon completion of the works.

Lighting: Fit high efficacy light fittings minimum three per four new fittings. Any recessed ceiling lights to be 30minute fire resisting.

SB smoke detectors: fit smoke detector system wired to mains supply and to each other with battery back up system. One per floor minimum. All installed to BS 5839-6:2004 To be over 300mm from doors, walls and light fittings

Party walls to be lined with 12.5mm foil back plasterboard over Celotex GA4050 insulation batts on 25x50mm battens at 600mm ctrs. (25mm air gap) Tape joints before plasterboarding

All new radiators to be fitted with TRVs

ALL DIMENSIONS TO BE CHECKED ON SITE. ANY DISCREPANCIES ARE TO BE MADE KNOWN TO THE SURVEYOR AS SOON AS POSSIBLE.

SEE STRUCTURAL CALCULATIONS FOR STEEL OR TIMBER DETAILS. THE CONTRACTOR IS TO SITE MEASURE ALL STRUCTURAL MEMBERS AND/OR STAIRCASE, BEFORE ORDERING.

THE PROPERTY OWNERS ARE TO ENSURE THAT ANY/ALL REQUIREMENTS OF THE PARTY WALL ACT ARE COMPLIED WITH. ADVICE CAN BE OBTAINED FROM THE SURVEYOR.

EXISTING LINTOLS AND FOUNDATIONS TO LOADBEARING WALLS TO BE EXPOSED FOR LOCAL AUTHORITY INSPECTION AND APPROVAL AS REQUIRED. NORMALLY AT THE START OF WORKS WHEN DRAINAGE RUNS ARE CHECKED.

CONTRACTOR IS TO CONFIRM THAT ALL NECESSARY LOCAL AUTHORITY APPROVALS HAVE BEEN OBTAINED BEFORE COMMENCING WORKS. COMMENCEMENT OF ANY WORKS PRIOR TO THIS IS ENTIRELY AT THE CLIENTS OR CONTRACTORS RISK. CHANGES TO THE SCHEME CARRIED OUT WITHOUT THE SURVEYORS APPROVAL MAY INVALIDATE THEIR LIABILITY.

A		Revision
Date		
© copyright		
THORNS YOUNG ARCHITECTURAL		
THORNS-YOUNG LTD CHARTERED BUILDING CONSULTANTS Website: www.thornsyoun.co.uk		
Fareham 21 Middle Road Park Gate SO31 7GH Tel: (01329) 888 322		Portsmouth 232 London Road North End PO2 9JQ Tel: (02392) 672 883

Client
Mr & Mrs T Munro

Job Title
17 North Crescent
Hayling Island

Drawing Title
Dormer & extension

Scale 1:100, 1:50 at A1

Date OCT 2016 Drawn by RN

Drg. No. 9204.16 Rev.