


BS5837 Preliminary Management Recommendations

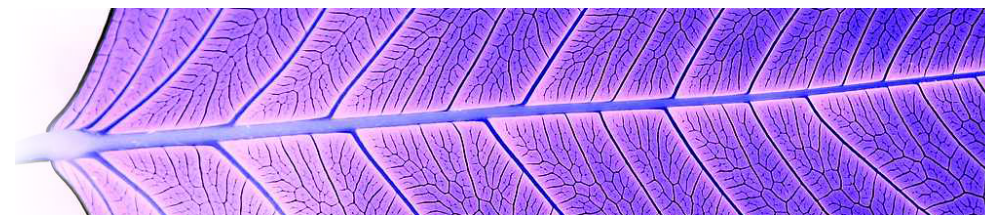

Ref.	Species	Measurements	Preliminary Management Recommendations	Timescale	Category
G1	Mixed species (Mixed species)	10 stems Life Stage: Mature	No action required.	Pre Construction	NotRecorded RPA none - no Retention Category specified.
T001	Oak, pedunculate (Quercus robur)	Height (m): 17 Stem Diam (mm): 800 Branch Spread(m): 2(N), 8(S), 4(E), 4(W) Crown Clearance (m): 3 Lowest Branch (m): 3(S) Life Stage: Mature	Dead wood (major greater than 25mm). Sever ivy at base.	Pre Construction	B2 RPA Radius: 9.6m. Area: 290 sq m.
T002	Oak, pedunculate (Quercus robur)	Height (m): 19 Stem Diam (mm): 1000 Branch Spread(m): 10(N), 10(S), 10(E), 10(W) Crown Clearance (m): 4 Lowest Branch (m): 3(S) Life Stage: Mature	No action required.	Pre Construction	A1 RPA Radius: 12.0m. Area: 452 sq m.

Ref.	Species	Measurements	Preliminary Management Recommendations	Timescale	Category
T003	Oak, pedunculate (<i>Quercus robur</i>)	Height (m): 19 Stem Diam (mm): 1200 Branch Spread(m): 6(N), 8(S), 5(E), 5(W) Crown Clearance (m): 3 Lowest Branch (m): 2.5(S) Life Stage: Mature	No action required.	Pre Construction	A1 RPA Radius: 14.4m. Area: 651 sq m.
T004	Maple, Field (<i>Acer campestre</i>)	Height (m): 10 2 stems, avg.(mm): 250 Branch Spread(m): 4(N), 4(S), 4(E), 4(W) Crown Clearance (m): 2 Lowest Branch (m): 2 Life Stage: Semi Mature	No action required.	Pre Construction	C2 RPA Radius: 4.2m. Area: 55 sq m.
T005	Poplar, Lombardy (<i>Populus nigra italica</i>)	Height (m): 25 Stem Diam (mm): 600 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	No action required.	Pre Construction	B2 RPA Radius: 7.2m. Area: 163 sq m.
T006	Poplar, White (<i>Populus alba</i>)	Height (m): 25 Stem Diam (mm): 600 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	No action required.	Pre Construction	B2 RPA Radius: 7.2m. Area: 163 sq m.
T007	Poplar, Lombardy (<i>Populus nigra italica</i>)	Height (m): 25 Stem Diam (mm): 600 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	No action required.	Pre Construction	B2 RPA Radius: 7.2m. Area: 163 sq m.

Ref.	Species	Measurements	Preliminary Management Recommendations	Timescale	Category
T008	Poplar, Lombardy (Populus nigra italica)	Height (m): 25 Stem Diam (mm): 600 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	No action required.	Pre Construction	B2 RPA Radius: 7.2m. Area: 163 sq m.
T009	Poplar, Lombardy (Populus nigra italica)	Height (m): 25 Stem Diam (mm): 1000 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	No action required.	Pre Construction	B2 RPA Radius: 12.0m. Area: 452 sq m.
T010	Poplar, Lombardy (Populus nigra italica)	Height (m): 25 Stem Diam (mm): 1000 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	No action required.	Pre Construction	B2 RPA Radius: 12.0m. Area: 452 sq m.
G1	Mixed species (Mixed species)	10 stems Life Stage: Mature	Protect trees with protective barriers - as shown on plans.	During Construction	NotRecorded RPA none - no Retention Category specified.
T001	Oak, pedunculate (Quercus robur)	Height (m): 17 Stem Diam (mm): 800 Branch Spread(m): 2(N), 8(S), 4(E), 4(W) Crown Clearance (m): 3 Lowest Branch (m): 3(S) Life Stage: Mature	Protect trees with protective barriers - as shown on plans.	During Construction	B2 RPA Radius: 9.6m. Area: 290 sq m.

Ref.	Species	Measurements	Preliminary Management Recommendations	Timescale	Category
T002	Oak, pedunculate (<i>Quercus robur</i>)	Height (m): 19 Stem Diam (mm): 1000 Branch Spread(m): 10(N), 10(S), 10(E), 10(W) Crown Clearance (m): 4 Lowest Branch (m): 3(S) Life Stage: Mature	Protect trees with protective barriers - as shown on plans.	During Construction	A1 RPA Radius: 12.0m. Area: 452 sq m.
T003	Oak, pedunculate (<i>Quercus robur</i>)	Height (m): 19 Stem Diam (mm): 1200 Branch Spread(m): 6(N), 8(S), 5(E), 5(W) Crown Clearance (m): 3 Lowest Branch (m): 2.5(S) Life Stage: Mature	Protect trees with protective barriers - as shown on plans.	During Construction	A1 RPA Radius: 14.4m. Area: 651 sq m.
T004	Maple, Field (<i>Acer campestre</i>)	Height (m): 10 2 stems, avg.(mm): 250 Branch Spread(m): 4(N), 4(S), 4(E), 4(W) Crown Clearance (m): 2 Lowest Branch (m): 2 Life Stage: Semi Mature	Protect trees with protective barriers - as shown on plans.	During Construction	C2 RPA Radius: 4.2m. Area: 55 sq m.
T005	Poplar, Lombardy (<i>Populus nigra italica</i>)	Height (m): 25 Stem Diam (mm): 600 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	Protect trees with protective barriers - as shown on plans.	During Construction	B2 RPA Radius: 7.2m. Area: 163 sq m.
T006	Poplar, White (<i>Populus alba</i>)	Height (m): 25 Stem Diam (mm): 600 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	Protect trees with protective barriers - as shown on plans.	During Construction	B2 RPA Radius: 7.2m. Area: 163 sq m.

Ref.	Species	Measurements	Preliminary Management Recommendations	Timescale	Category
T007	Poplar, Lombardy (<i>Populus nigra italica</i>)	Height (m): 25 Stem Diam (mm): 600 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	Protect trees with protective barriers - as shown on plans.	During Construction	B2 RPA Radius: 7.2m. Area: 163 sq m.
T008	Poplar, Lombardy (<i>Populus nigra italica</i>)	Height (m): 25 Stem Diam (mm): 600 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	Protect trees with protective barriers - as shown on plans.	During Construction	B2 RPA Radius: 7.2m. Area: 163 sq m.
T009	Poplar, Lombardy (<i>Populus nigra italica</i>)	Height (m): 25 Stem Diam (mm): 1000 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	Protect trees with protective barriers - as shown on plans.	During Construction	B2 RPA Radius: 12.0m. Area: 452 sq m.
T010	Poplar, Lombardy (<i>Populus nigra italica</i>)	Height (m): 25 Stem Diam (mm): 1000 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	Protect trees with protective barriers - as shown on plans.	During Construction	B2 RPA Radius: 12.0m. Area: 452 sq m.
G1	Mixed species (Mixed species)	10 stems Life Stage: Mature	No action required.	Post Construction	NotRecorded RPA none - no Retention Category specified.

Ref.	Species	Measurements	Preliminary Management Recommendations	Timescale	Category
T001	Oak, pedunculate (<i>Quercus robur</i>)	Height (m): 17 Stem Diam (mm): 800 Branch Spread(m): 2(N), 8(S), 4(E), 4(W) Crown Clearance (m): 3 Lowest Branch (m): 3(S) Life Stage: Mature	No action required.	Post Construction	B2 RPA Radius: 9.6m. Area: 290 sq m.
T002	Oak, pedunculate (<i>Quercus robur</i>)	Height (m): 19 Stem Diam (mm): 1000 Branch Spread(m): 10(N), 10(S), 10(E), 10(W) Crown Clearance (m): 4 Lowest Branch (m): 3(S) Life Stage: Mature	Protect trees with protective barriers - as shown on plans.	Post Construction	A1 RPA Radius: 12.0m. Area: 452 sq m.
T003	Oak, pedunculate (<i>Quercus robur</i>)	Height (m): 19 Stem Diam (mm): 1200 Branch Spread(m): 6(N), 8(S), 5(E), 5(W) Crown Clearance (m): 3 Lowest Branch (m): 2.5(S) Life Stage: Mature	No action required.	Post Construction	A1 RPA Radius: 14.4m. Area: 651 sq m.
T004	Maple, Field (<i>Acer campestre</i>)	Height (m): 10 2 stems, avg.(mm): 250 Branch Spread(m): 4(N), 4(S), 4(E), 4(W) Crown Clearance (m): 2 Lowest Branch (m): 2 Life Stage: Semi Mature	No action required.	Post Construction	C2 RPA Radius: 4.2m. Area: 55 sq m.
T005	Poplar, Lombardy (<i>Populus nigra italica</i>)	Height (m): 25 Stem Diam (mm): 600 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	No action required.	Post Construction	B2 RPA Radius: 7.2m. Area: 163 sq m.

Ref.	Species	Measurements	Preliminary Management Recommendations	Timescale	Category
T006	Poplar, White (Populus alba)	Height (m): 25 Stem Diam (mm): 600 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	No action required.	Post Construction	B2 RPA Radius: 7.2m. Area: 163 sq m.
T007	Poplar, Lombardy (Populus nigra italica)	Height (m): 25 Stem Diam (mm): 600 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	No action required.	Post Construction	B2 RPA Radius: 7.2m. Area: 163 sq m.
T008	Poplar, Lombardy (Populus nigra italica)	Height (m): 25 Stem Diam (mm): 600 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	No action required.	Post Construction	B2 RPA Radius: 7.2m. Area: 163 sq m.
T009	Poplar, Lombardy (Populus nigra italica)	Height (m): 25 Stem Diam (mm): 1000 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	No action required.	Post Construction	B2 RPA Radius: 12.0m. Area: 452 sq m.
T010	Poplar, Lombardy (Populus nigra italica)	Height (m): 25 Stem Diam (mm): 1000 Branch Spread(m): 3(N), 3(S), 3(E), 3(W) Crown Clearance (m): 5 Life Stage: Mature	No action required.	Post Construction	B2 RPA Radius: 12.0m. Area: 452 sq m.