




300 mm
200
100
50
10 mm
0

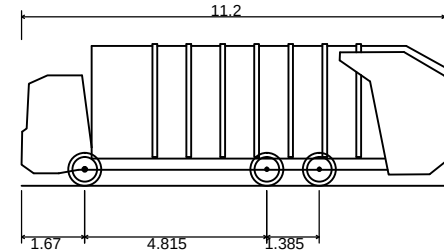


REFUSE VEHICLE



Phoenix 2 Duo (P2-15W with Elite 6x4 chassis)
Overall Length 11.200m
Overall Width 2.530m
Overall Body Height 3.751m
Min Body Ground Clearance 0.304m
Track Width 2.500m
Lock to Lock Time 4.00s
Kerb to Kerb Turning Radius 9.500m

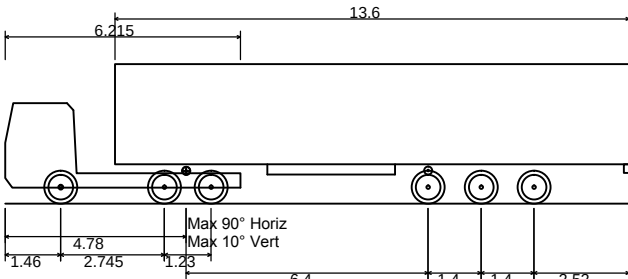

Articulated Vehicle with Twin Steered Tractor
Overall Length 16.500m
Overall Width 2.550m
Overall Body Height 3.691m
Min Body Ground Clearance 0.426m
Max Track Width 2.500m
Lock to Lock Time 6.00s
Kerb to Kerb Turning Radius 6.987m



Dennis Sabre Fire Tender (LWB)
Overall Length 7.700m
Overall Width 2.430m
Overall Body Height 3.512m
Min Body Ground Clearance 0.397m
Track Width 2.380m
Lock to Lock Time 5.00s
Kerb to Kerb Turning Radius 7.400m

STANDARD NOTES:

- This drawing is to be read in conjunction with all other OPUS drawings, and with all relevant Architect's and Engineer's drawings and specification.
- No dimensions are to be scaled from this drawing. Unless noted otherwise all dimensions are in millimeters and all levels are in metres from the site datum. All dimensions to be checked on site. All details and dimensions relating to sub-Contractors work must be checked and agreed between the sub-Contractor or supplier and the general Contractor.
- The electronic information from this drawing cannot be guaranteed as dimensionally drawn exact. Figure dimensions must be used for setting out and detailing. CPUS logos and company information must be removed from copies if information is re-used.
- The main Contractor is responsible for the design of all temporary works, and is also responsible for the safe maintenance and stability of existing buildings at all times.
- The main Contractor is responsible for the mitigation of all occurrences of ground water during the construction period.
- Any information given regarding existing underground services is given in good faith after consultation with the relevant authority, however accuracy is not guaranteed. The main Contractor is responsible for checking all information on site prior to work commencing and taking due care and attention whilst undertaking the works.
- The contractor must comply with all current legislation relating to Health & Safety.

1:1 @ A1
1:2 @ A3
0 10 20 30 40 50 60 70 80 90 100 mm



16.5m HGV



FIRE TENDER

TENDER

Revision	Amendment	Approved	Revision Date
P1	ISSUE FOR INFORMATION	CAA	18-03-2016
T2	ISSUED FOR TENDER	APT	30.03.2016
T3	UPDATED FOR NEW LAYOUT	CAA	05.10.2016



Modulus House,
Salterns Lane, Fareham
Hampshire PO16 0QS

Drawn	Designed	Approved	Revision Date
CAA	CAA	APT	18.03.2016
Project No.	Scale	Drawing No.	Sheet No.
FA E-F1846.00	1:200	350	1 of 1

Project
EAST LEIGH HOUSE
BARTONS ROAD

Sheet
SWEPT PATH

Drawing No.	Sheet No.	Revision
350	1 of 1	T3