




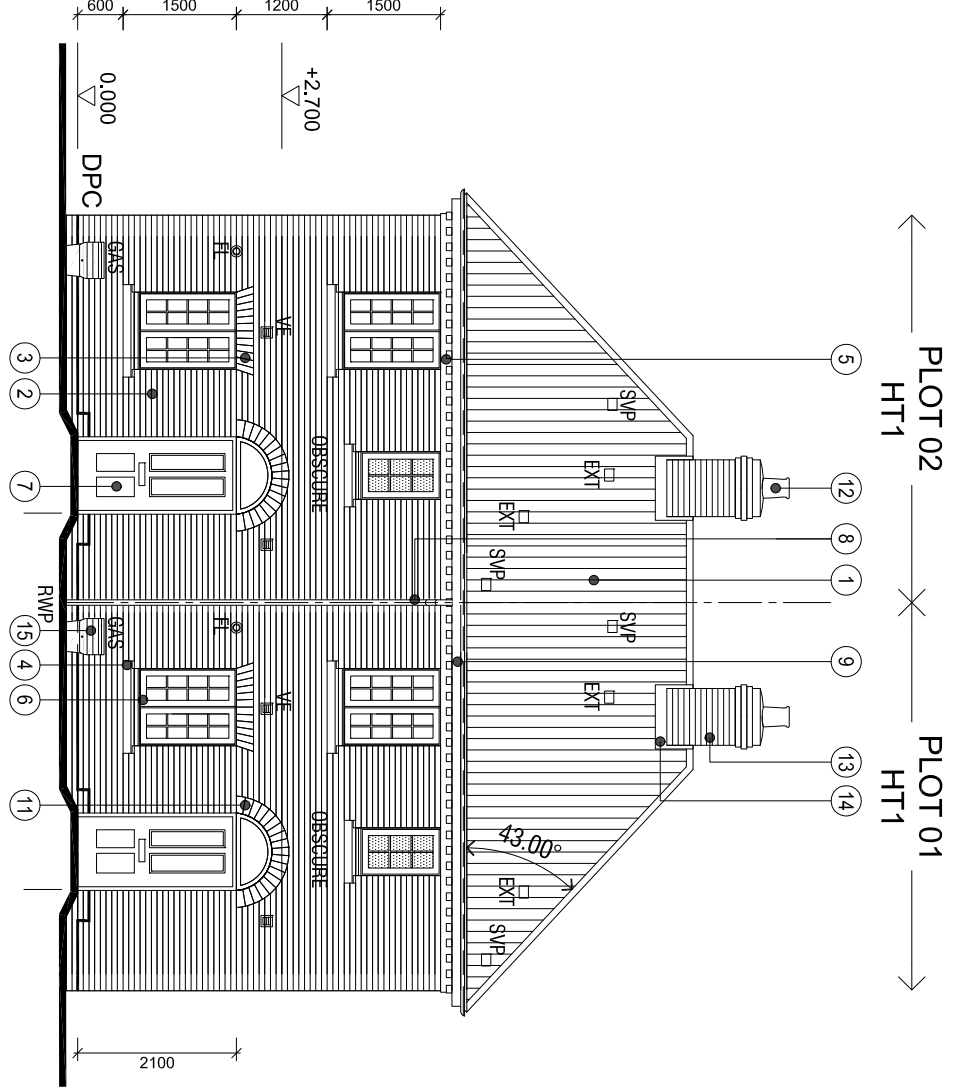


NORTH (WEST STREET) ELEVATION

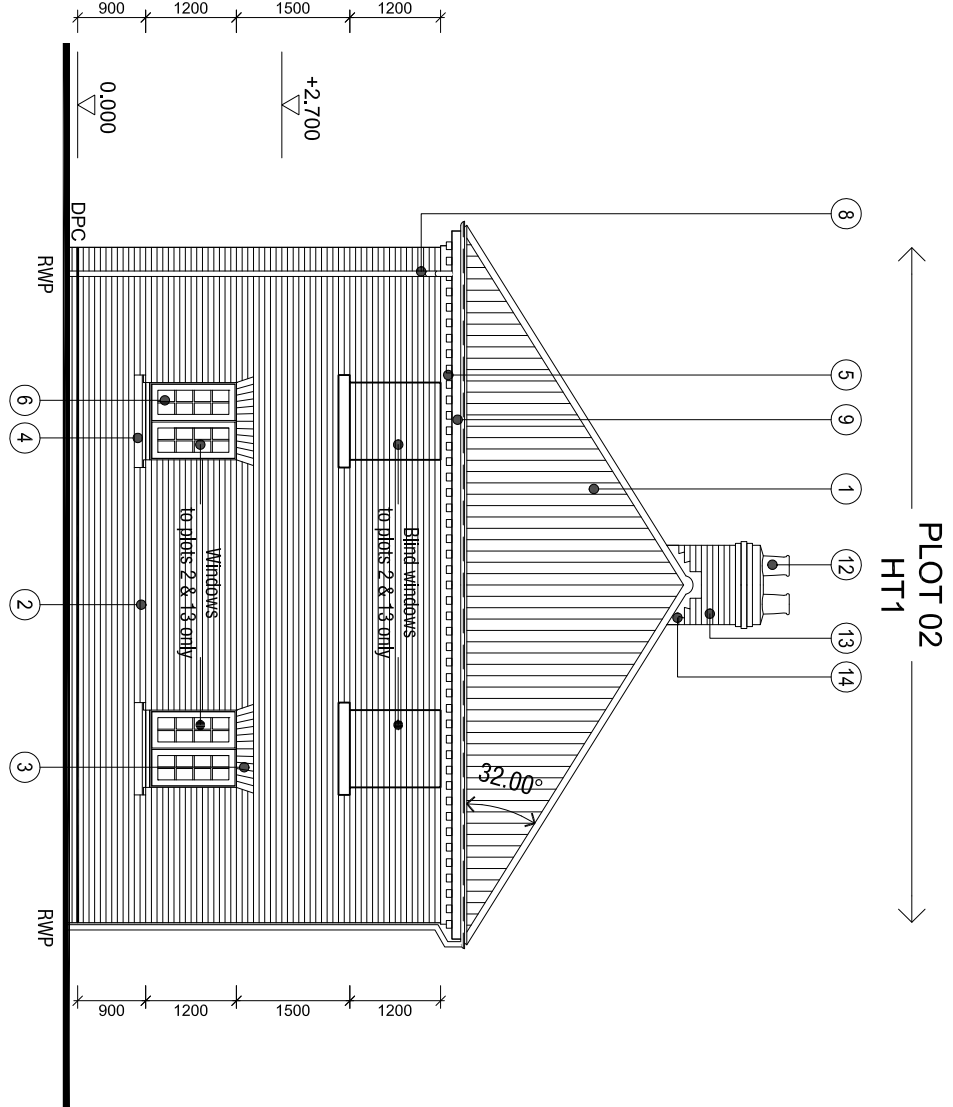

EAST (SITE ENTRANCE) ELEVATION

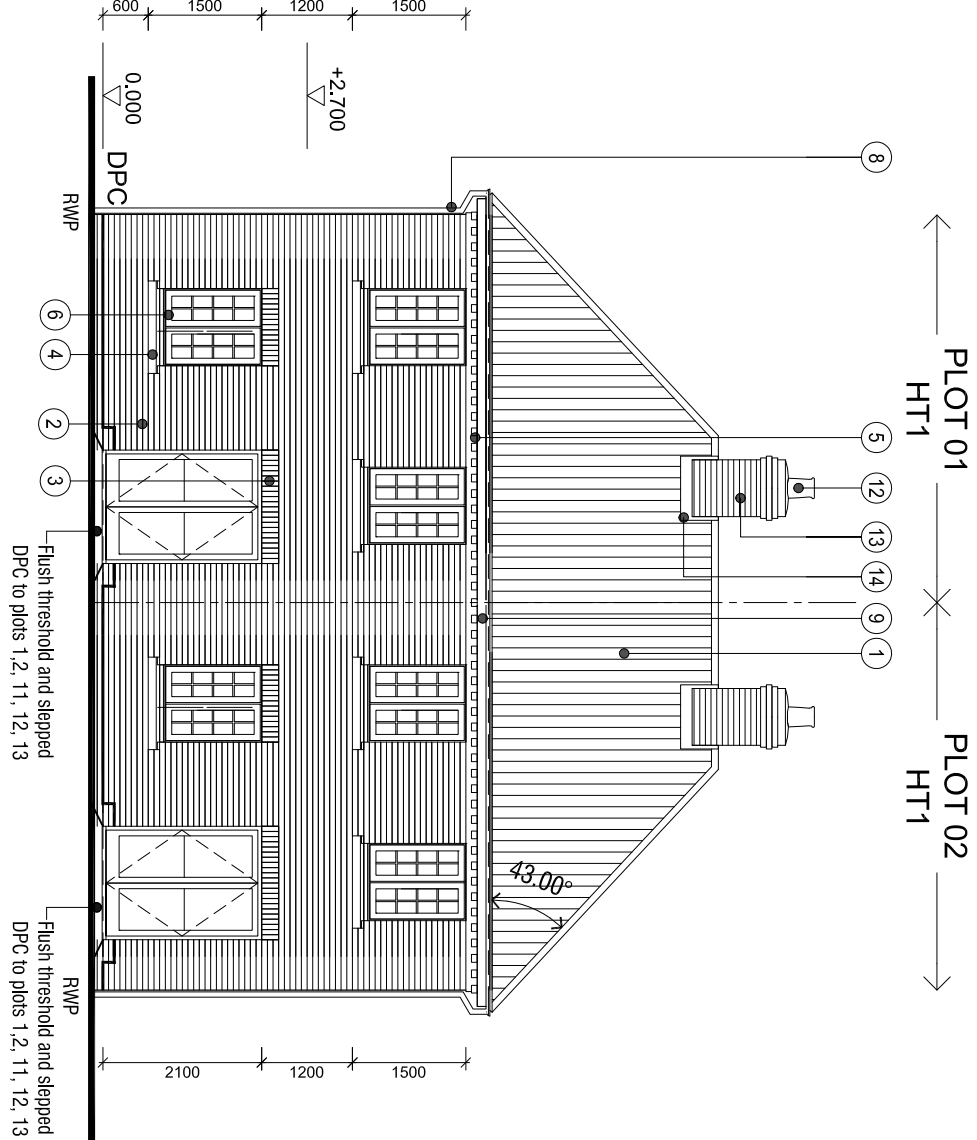

SOUTH (GARDEN) ELEVATION

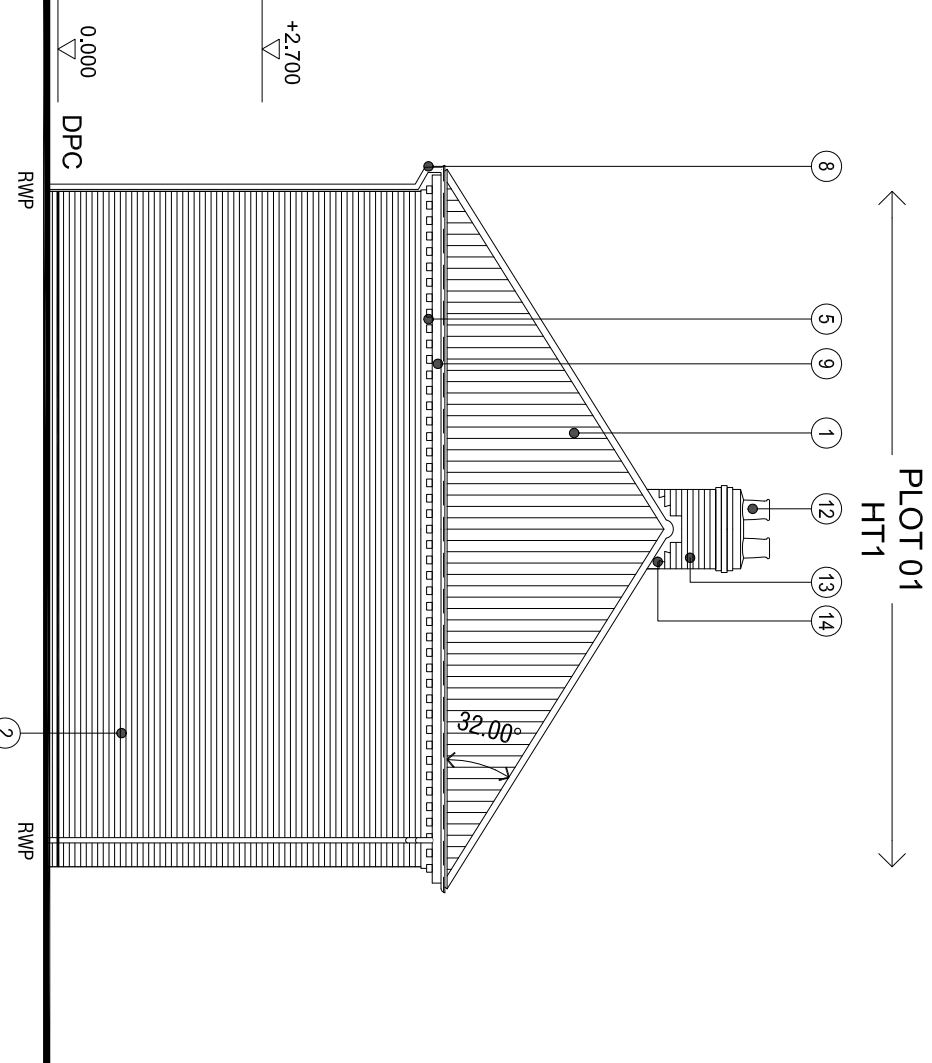

WEST ELEVATION

MATERIALS SCHEDULE:

1. Clay plain tiles
2. Facing brickwork
3. Stained brickwork
4. Stained brickwork
5. Dentil brick course of regular pattern of projecting headers cut to project 25mm
6. White prefinished timber doors and windows
7. Steel front/rear door - white glass
8. UPVC (unplasticized polyvinyl chloride) 100mm gutters & downpipes - black
9. UPVC (unplasticized polyvinyl chloride) - white
10. Code 4 lead flashing
11. Round brick arch
12. Chimney pot red top - plain red
13. Cream-colored lightweight chimney with black slip finish
14. Ground level gas meter box
15. Ground level gas meter box

ALL materials to be confirmed by Client, Extent & type of lead joint reinforcement to be confirmed by Structural Engineer.

ALL ground floor glazing to be laminated to conform the Part 2 of the SSI requirements. On other floors, laminated glazing is indicated with a 'V'.

Movement joint positions to be confirmed by Structural Engineer.

REVISIONS		Rev	Date	Drawn By	Checked By	Scale	Project No.	Sheet No.	Client	Architect	Head Office
P3	06.07.15	Windows openings adjusted to suit new consent windows of elevations	HR	SCP					Balfour Beatty	HGP ARCHITECTS	HEAD OFFICE
P2	26.06.15	Windows in east (site entrance) elevation revised.	HR	SCP							FRANKLIN, MANCHESTER, 0161 270 1111
P1	26.04.15	Re-based as P1 status	HR	SCP							T: 01329 293 225
Preliminary											LEDS OFFICE
											2 THE PALLS, LEEDS, LS2 2JU
											T: 01132 372 750
											HGP ARCHITECTS Ltd
											Check dates on file.

