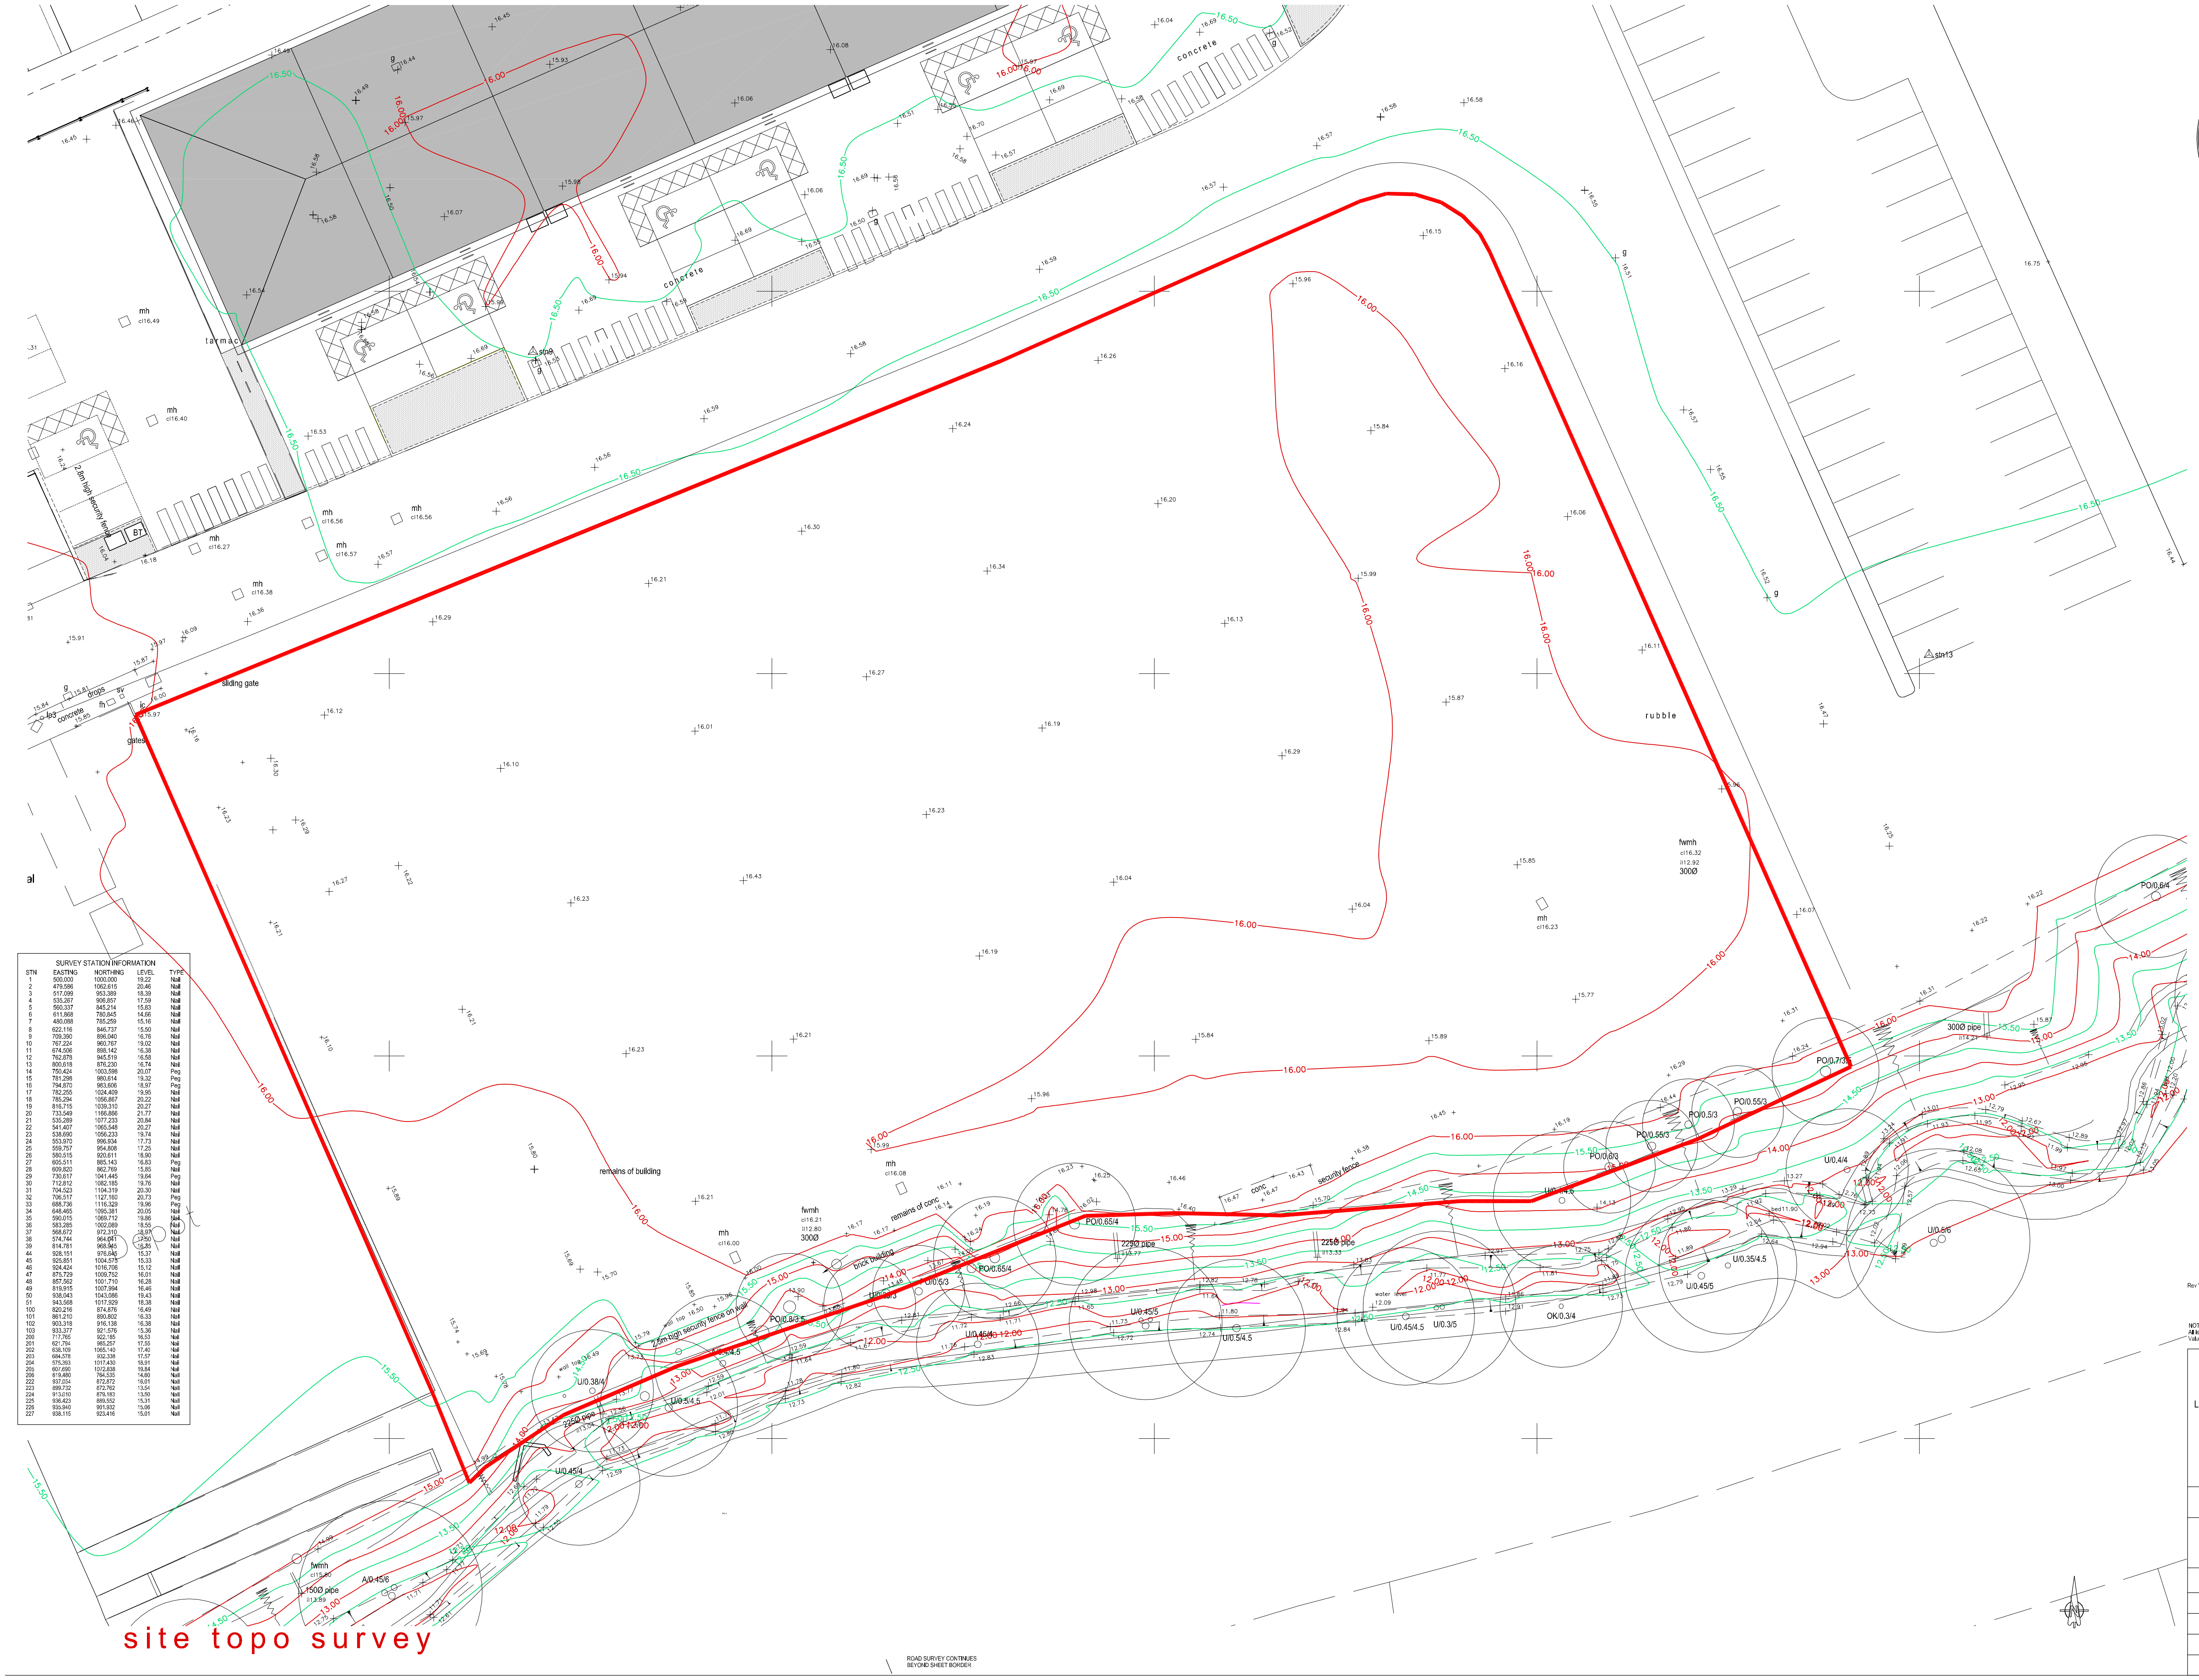

SURVEY STATION INFORMATION

STN	EASTING	NORTHING	LEVEL	TYPE
1	500.000	1000.000	19.22	Nail
2	479.586	1062.615	20.46	Nail
3	517.099	953.389	18.39	Nail
4	535.267	906.857	17.59	Nail
5	560.337	845.214	15.83	Nail
6	611.868	780.845	14.66	Nail
7	480.088	785.259	15.16	Nail
8	622.116	846.737	15.50	Nail
9	709.390	896.040	16.76	Nail
10	767.224	960.767	19.02	Nail
11	674.506	898.142	16.38	Nail
12	762.878	945.519	16.58	Nail
13	800.618	876.230	16.74	Nail
14	750.424	1003.598	20.07	Peg
15	781.298	980.614	19.32	Peg
16	794.870	983.606	18.97	Peg
17	782.255	1024.409	19.95	Nail
18	785.294	1056.867	20.22	Nail
19	816.715	1039.310	20.27	Nail
20	733.549	1166.866	21.77	Nail
21	535.289	1077.233	20.84	Nail
22	541.407	1065.548	20.27	Nail
23	538.690	1056.233	19.74	Nail
24	553.970	996.934	17.73	Nail
25	559.757	954.808	17.25	Nail
26	580.515	920.611	18.90	Nail
27	605.511	885.143	16.83	Peg
28	609.820	862.769	15.85	Nail
29	730.617	1041.445	19.64	Peg
30	712.812	1082.185	19.76	Nail
31	704.523	1104.319	20.30	Nail
32	706.517	1127.160	20.73	Peg
33	688.736	1116.329	19.96	Peg
34	648.465	1095.381	20.05	Nail
35	590.015	1069.712	19.86	Nail
36	583.285	1002.089	18.55	Nail
37	568.672	972.310	18.97	Nail
38	574.744	964.041	17.50	Nail
39	814.781	968.945	16.35	Nail
44	928.151	976.645	15.37	Nail
45	925.851	1004.575	15.33	Nail
46	924.424	1016.706	15.12	Nail
47	875.729	1009.752	16.01	Nail
48	857.562	1001.710	16.28	Nail
49	819.915	1007.994	16.46	Nail
50	938.043	1043.086	19.43	Nail
51	943.568	1017.929	18.38	Nail
100	820.216	874.876	16.49	Nail
101	861.210	890.802	16.33	Nail
102	903.318	916.138	16.38	Nail
103	933.377	921.576	15.36	Nail
200	717.765	922.185	16.53	Nail
201	621.794	985.257	17.55	Nail
202	638.109	1065.140	17.40	Nail
203	684.578	932.338	17.57	Nail
204	575.393	1017.430	18.91	Nail
205	607.690	1072.838	19.84	Nail
206	619.480	764.535	14.60	Nail
222	937.054	872.872	16.01	Nail
223	899.732	872.762	13.54	Nail
224	913.010	879.183	13.50	Nail
225	936.423	889.552	15.31	Nail
226	935.940	901.932	15.06	Nail
227	938.115	923.416	15.01	Nail

TREES

a	Ash
al	Alder
ap	Apple
b	Beech
c	Cedar
cb	Copper Beech
ch	Cherry
cy	Cypress
e	Elm
el	Elder
eu	Eucalyptus
f	Fir
fr	Fruit
hz	Hazel
hc	Horse Chestnut
ho	Holm Oak
hw	Hawthorn
hy	Holly
la	Larch
lb	Laburnum
lm	Lime
lr	Laurel
m	Maple
mg	Magnolia
ok	Oak
p	Pine
po	Poplar
pr	Pear
r	Redwood
rh	Rhododendron
ro	Rowan
sb	Silver Birch
sc	Sweet Chestnut
sp	Scots Pine
su	Spruce
sy	Sycamore
u	Unidentified
w	Willow
y	Yew

Species / Dia / Spread (max) / Ht
e.g. OK / 0.6 / 8 / 15

KEY

BT	British Telecom
CB	Control Box
CL	Cover Level
CTV	Cable Television
EL	Electric
EP	Electricity Pole
FH	Fire Hydrant
GSV	Gas Stop Valve
HT	Height
HVC	High Voltage Cable
IC	Inspection Cover
IL	Invert Level
LP	Lamp Post
MH	Man-Hole
MKR	Marker
O/H	Overhead
G	Road Gully
PB	Post Box
RNP	Road Name Plate
RS	Road Sign
S/A	Soakaway
ST	Stay / Strut
SV	Stop Valve (Unidentified)
TB	Telephone Box
TH	Trial Hole
TL	Traffic Light
TP	Telegraph Pole
UTL	Unable to Lift
VP	Vent pipe
WM	Water Meter
WSV	Water Stop Valve

FENCES

BWF	Barbed Wire Fence
CBF	Closed Board Fence
CLF	Chain Link Fence
CP	Concrete Post
CPF	Chestnut Paling Fence
CWF	Chicken Wire Fence
PKF	Picket Fence
PRF	Post & Rail Fence
PWF	Post & Wire Fence
SP	Steel Post
WMF	Wire Mesh Fence
WPF	Wood Panel Fence

Ditch to South of Site surveyed.
Extra Manholes surveyed and lifted.

Rev 'A' - OCT 2005 - Post-demolition levels surveyed

NOTES
All levels are related to OSBM situated on No. 72 Bramdean Drive.
Value 15.74m.

Land Surveyors & Engineers

siteline

No.1 Shelley Farm
Ower
Hampshire
S051 6AS

Tel: 023 80 811081
Fax: 023 80 811012
E-mail: siteline.co.uk

BARRATT SOUTHAMPTON	Client
DUNSBURY WAY HAVANT HAMPSHIRE	Contract
SITE SURVEY	Title
36HV002A	Drawing No.
SEPTEMBER 2005	Date
A1 1:200 A3 1:400	Scale
AB	Surveyor