


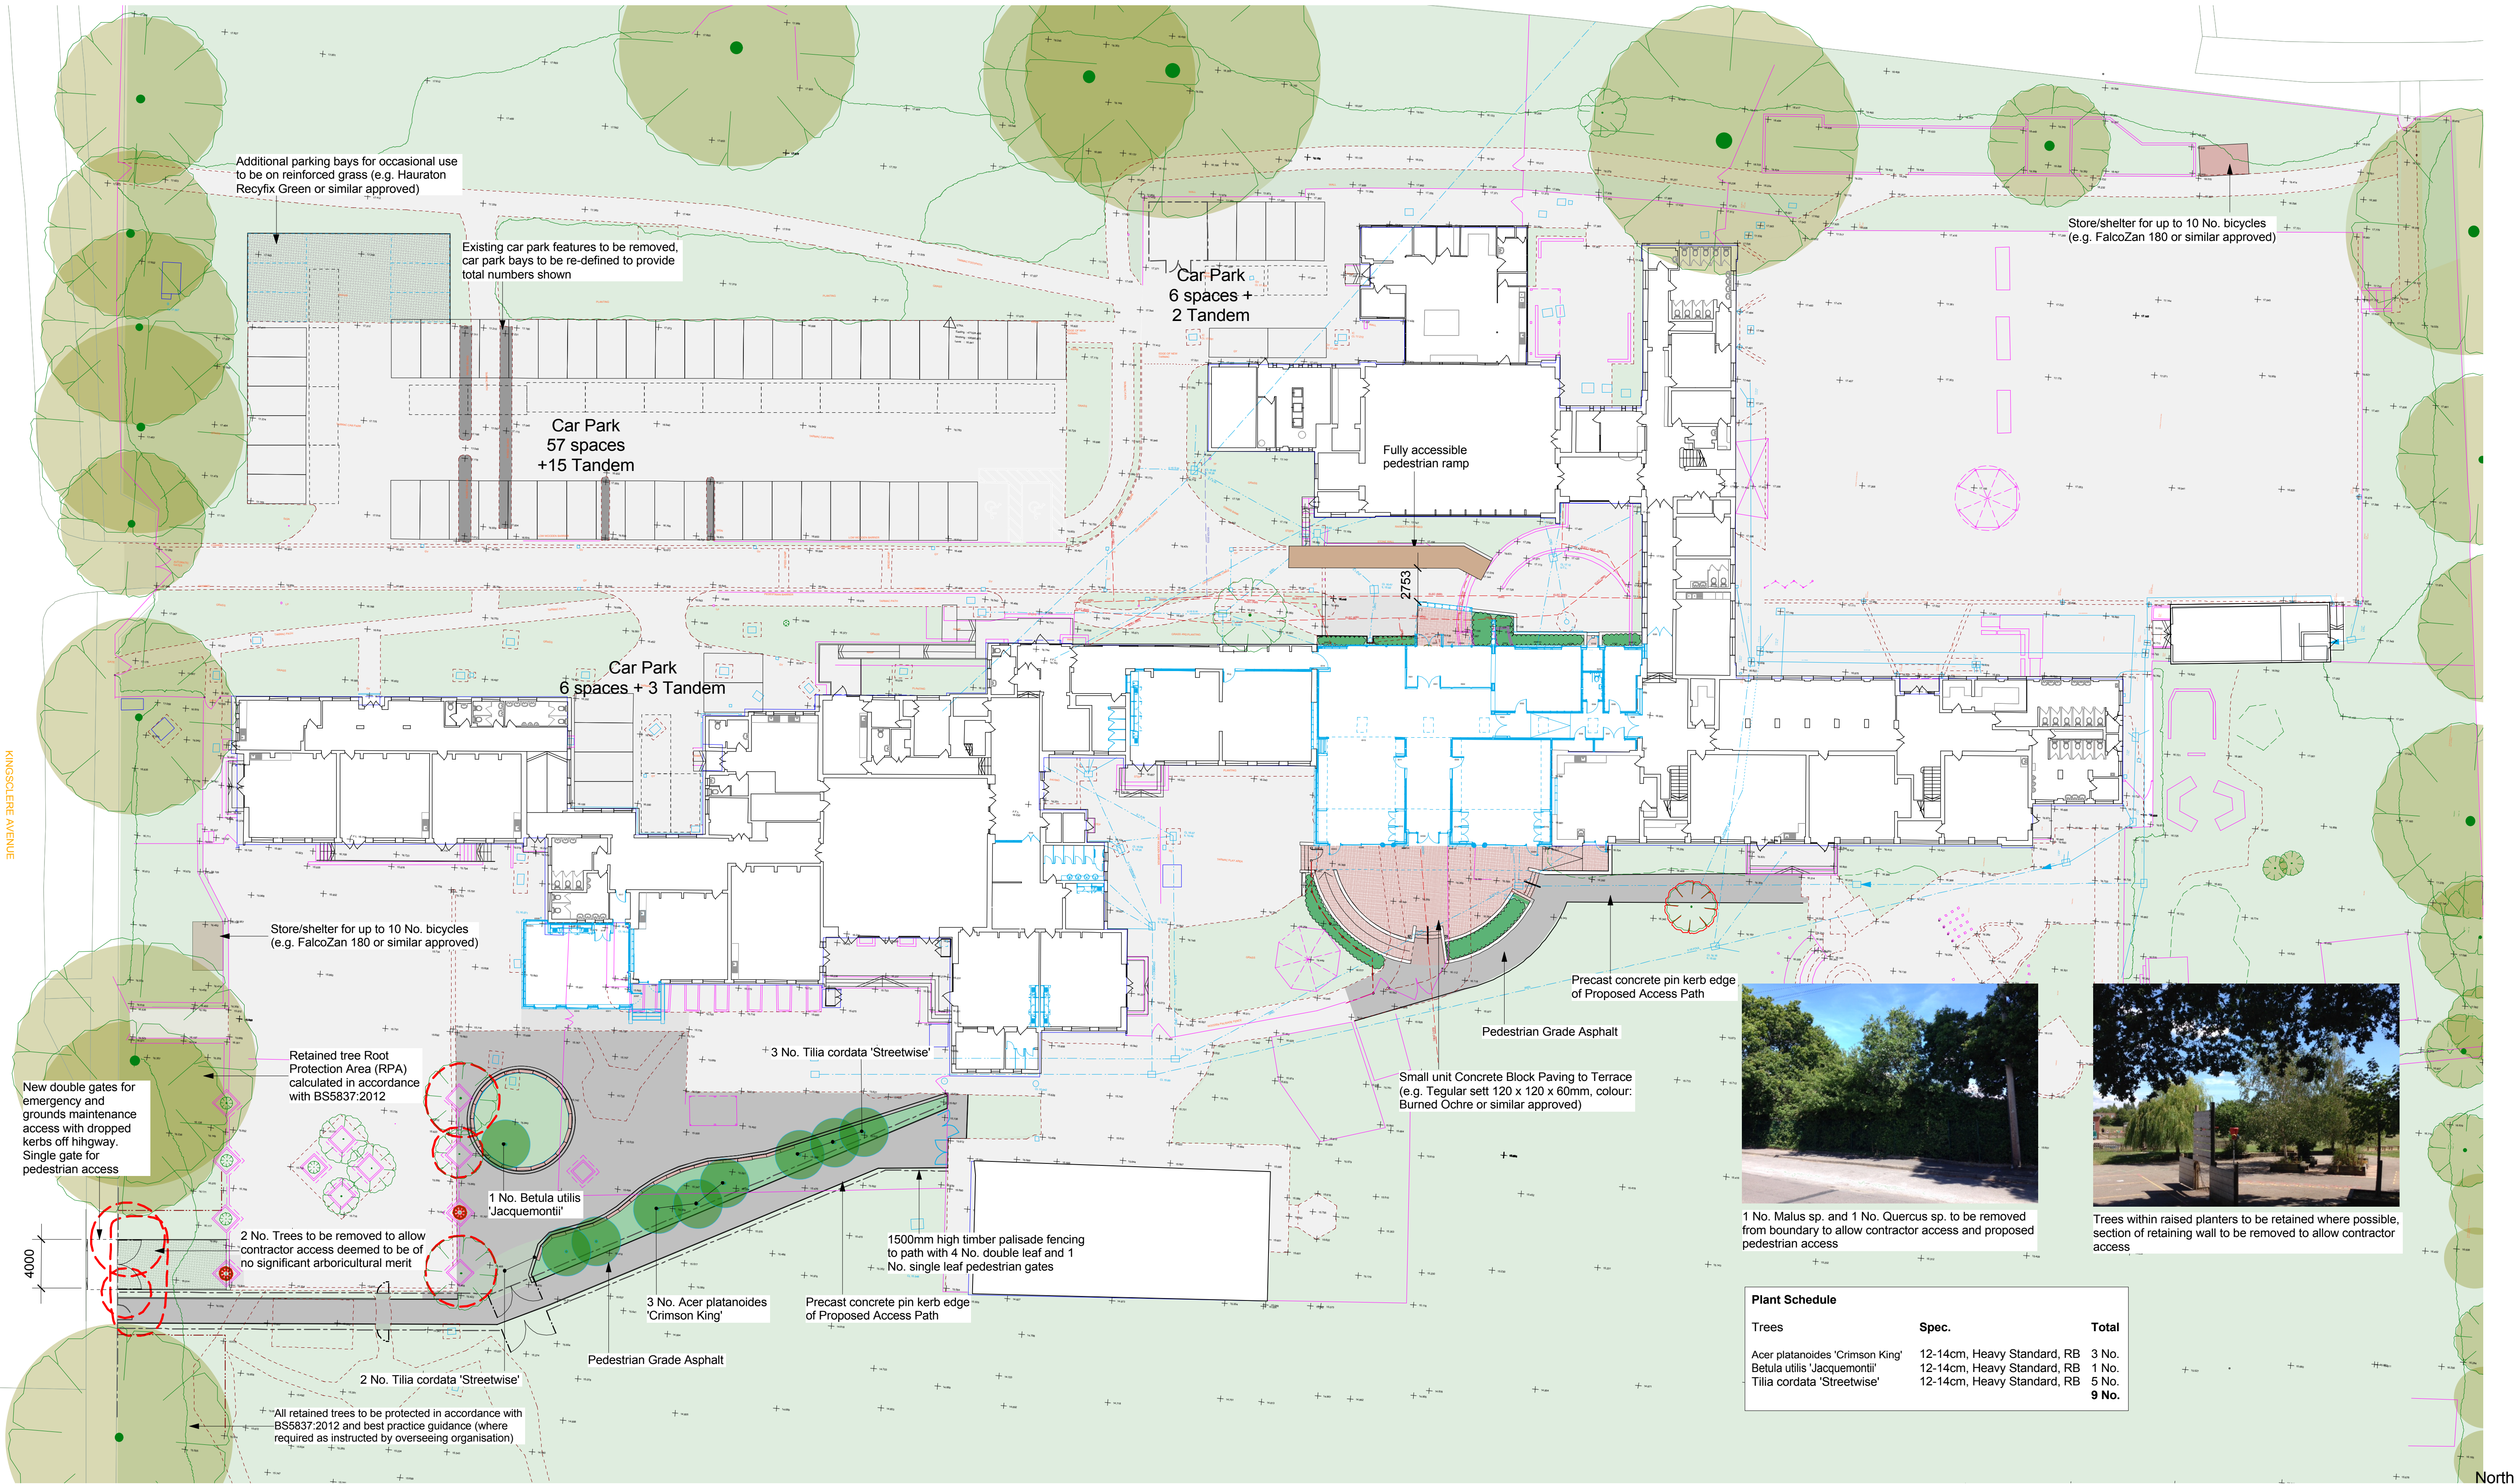

KINGSCLERE AVENUE

4000

Key:

Proposed Hardworks

- Existing Footway and Hard Play Surfacing Retained
- Pedestrian Grade Asphalt
- Trees and shrubs to be removed

Proposed Softworks

- Small unit Concrete Block Paving to Terrace (e.g. Tegular sett 120 x 120 x 60mm, colour: Burned Ochre or similar approved)
- Synthetic Grass (Tigerturf 'Finesse' or Equal Approved) Surfacing for Soft Play
- Existing Site Features to be Removed

Proposed Trees

- Proposed Trees (12-14cm, heavy standard, rootballed / double staked)
- Existing Grass Retained
- Existing Trees to be Retained
- Existing Trees to be Removed for Arboricultural Management / Development Purposes

Fencing

- 1500mm high timber palisade fencing to path with 4 No. double leaf and 1 No. single leaf pedestrian gates
- 2000mm high galvanized tube and welded mesh infill panels installed and maintained in accordance to BS5837:2012 (where required as instructed by overseeing organisation)

Note:
Total number of car parking spaces provided is 84 (including 2 No. accessible bays and 13 doubled parked)



Plant Schedule		
Trees	Spec.	Total
Acer platanoides 'Crimson King'	12-14cm, Heavy Standard, RB	3 No.
Betula utilis 'Jacquemontii'	12-14cm, Heavy Standard, RB	1 No.
Tilia cordata 'Streetwise'	12-14cm, Heavy Standard, RB	5 No.
		9 No.



1 No. Malus sp. and 1 No. Quercus sp. to be removed from boundary to allow contractor access and proposed pedestrian access



Trees within raised planters to be retained where possible, section of retaining wall to be removed to allow contractor access

0 20 m

PLANNING

Hampshire County Council

PROJECT
**Riders Infant and Junior School
2FE - 3FE Expansion**

SCALE
1:250@ A1
1:500@ A3

DATE
03.07.14

DRAWN
GL

CHKD.
MR

DRAWING No.
P10292 - L - 701

FILE REF.
File name

REVISION
A

HCC Property Services,
Three Minsters House,
76 High Street, Winchester SO23 8UL.
tel: (01962) 847801

SHEET CONTENTS
**Proposed Site Works
Landscape Poposals**