


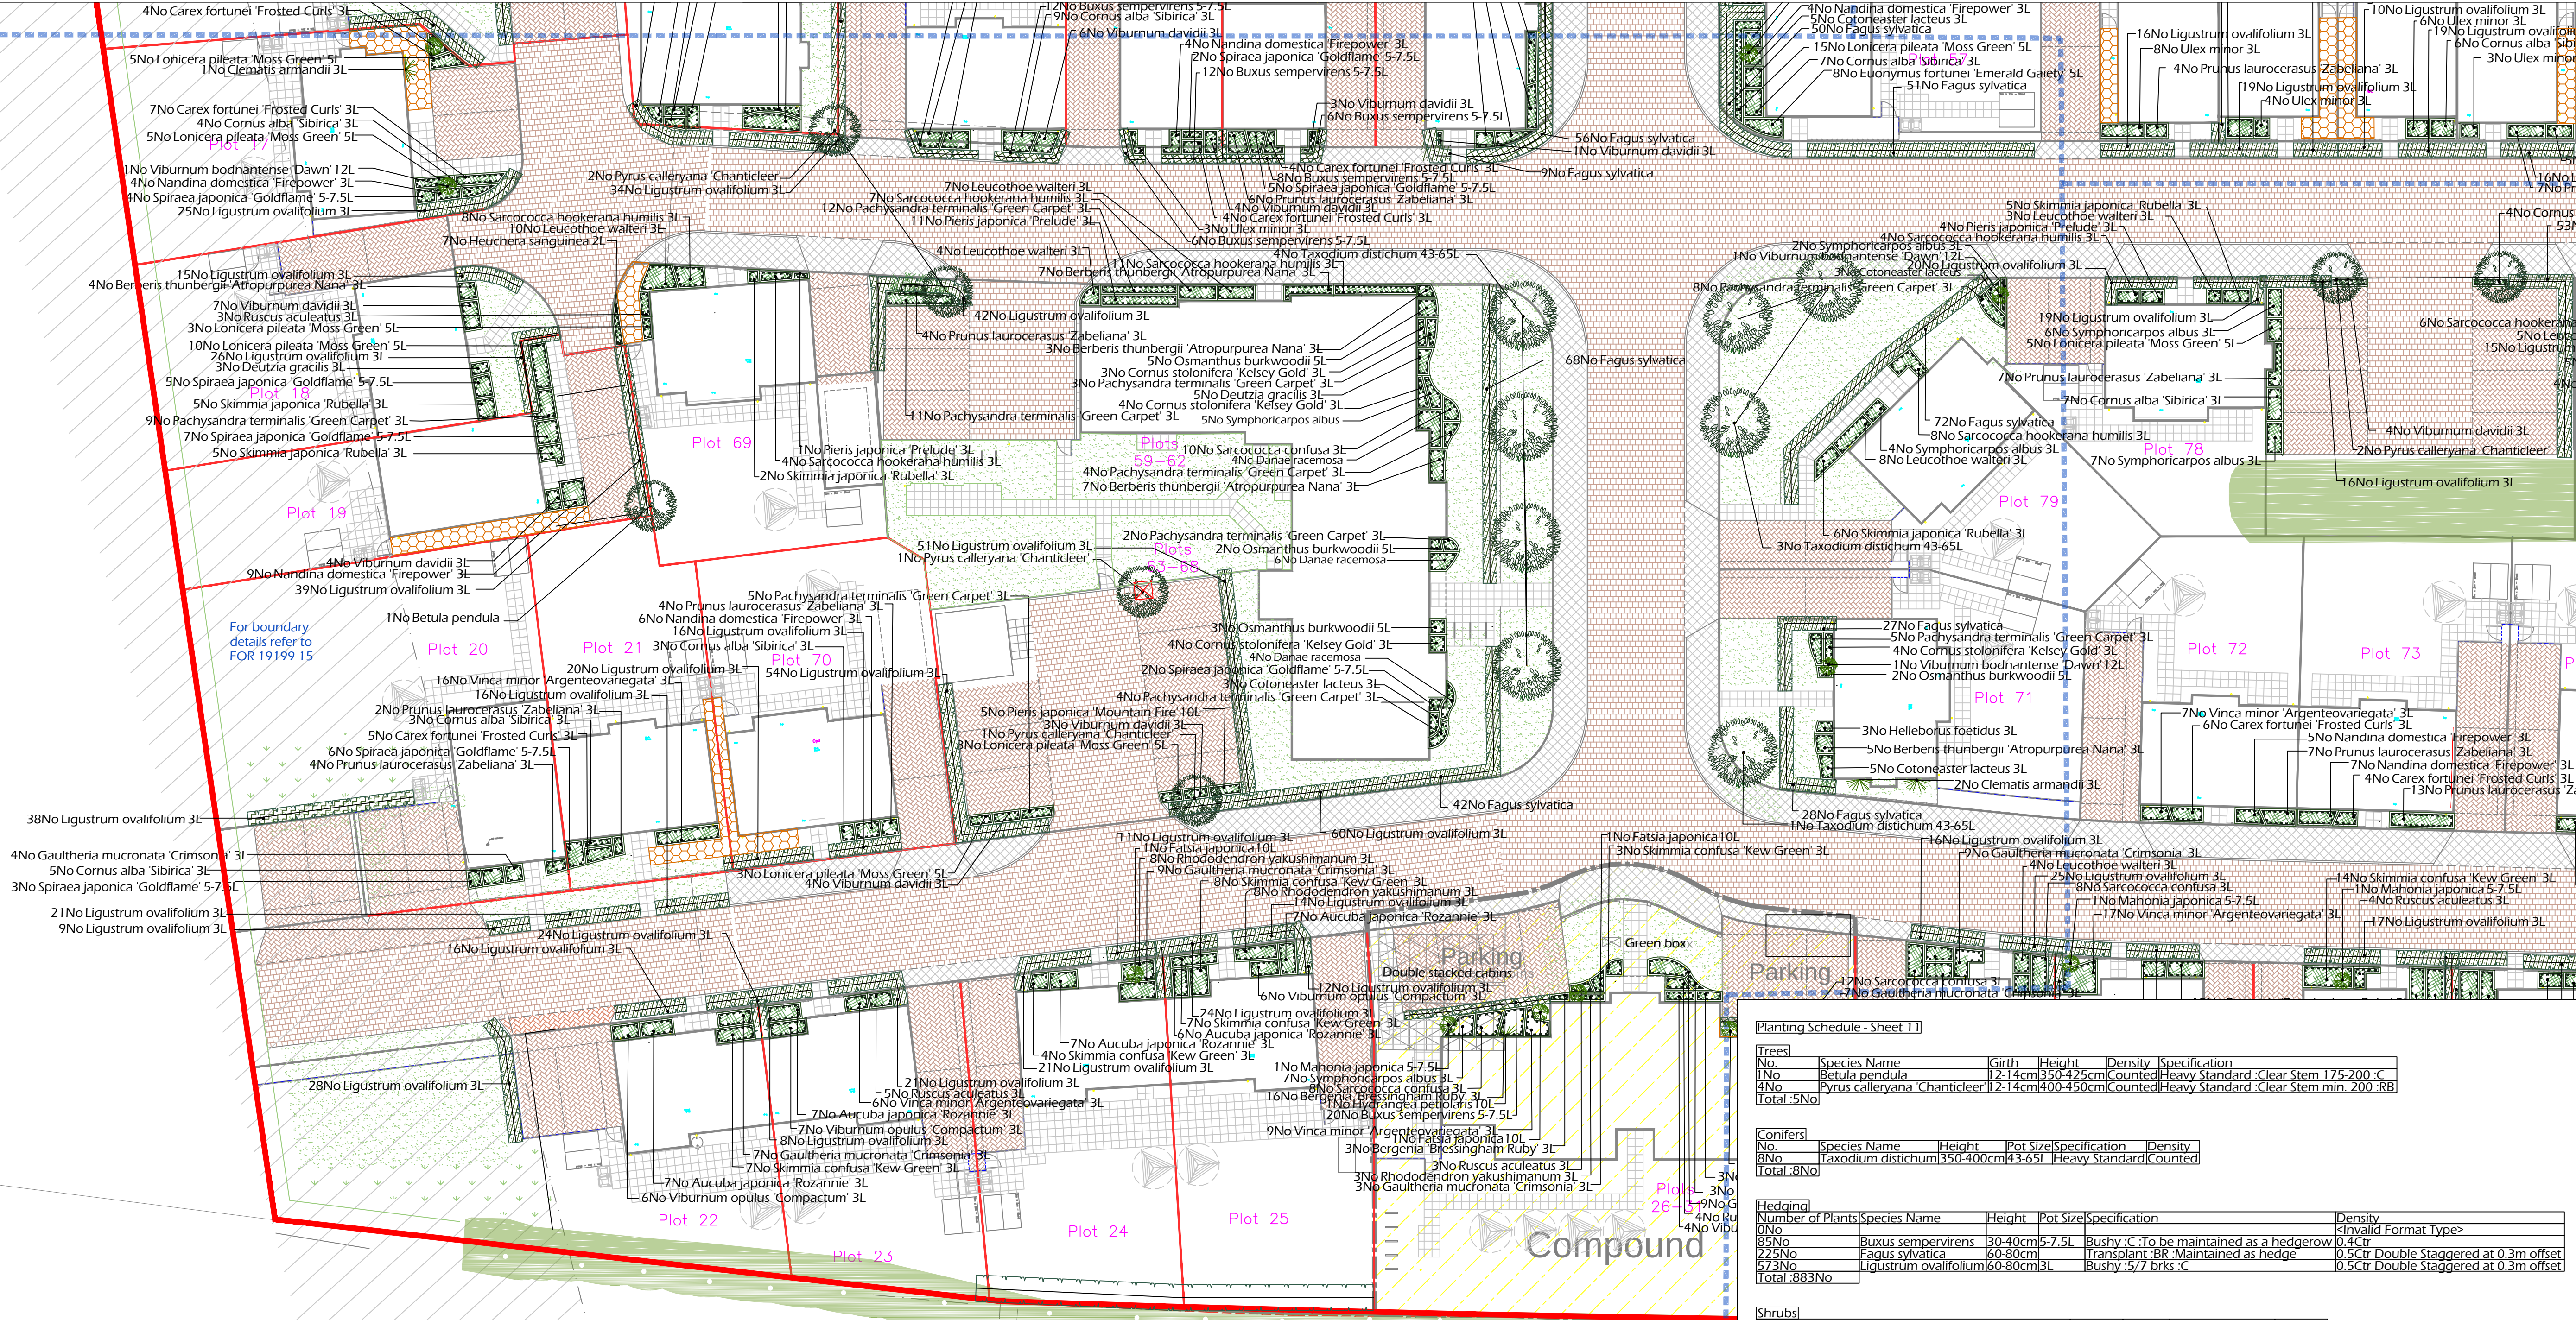


SPECIFICATION
Forestry Commission Practice note 8.
All native species should be of local stock. Native trees and shrubs certified as British Native plant stock.
All planting stock should comply with the Horticultural Trade Association National Plant specification.
All planting preparation, handling, planting & maintenance should be in accordance with CPSE Code for Handling and Establishing plants.
All trees and shrubs to comply with BS 3936 Part 1 1992, planted to BS 4043:1989 and BS 4428:1989.
All works generally, to comply with the written Soft Landscape Specification.
Topsoil incorporated into planting beds to be gently mulched towards the centre of each bed to allow for settlement.
On completion of planting the whole area of the shrub bed shall be mulched with 75mm consolidated thickness of medium textured decorative grade natural pine bark having first been prepared in accordance with the specification.
Free standing hedges shall have a 3 strand galvanised wire and tanalised softwood timber post fence, to BS 1722 Part 3:2000, erected along a line between the two rows of hedge plants.
All existing trees and hedges to be protected in accordance with BS5837:2012 for the duration of the construction period.

NOTE: DO NOT SCALE FROM DRAWING

Legend

- Existing trees and vegetation to be retained and protected during construction
- Proposed tree planting within hard landscape. See detail on sheet
- Proposed tree planting within soft landscape. See detail on sheet
- Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties.
- Proposed climbing plants to be trained up adjacent wall/fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed low hedge to be planted in a single row at 400mm centres. Hedge to be maintained at 500mm high.
- Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height and 1.8m height adjacent to site boundaries
- Proposed mixed native hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. To be maintained at a 1.8m height.
- Proposed shrub planting to receive 75mm bark mulch.
- Proposed amenity grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Retain existing grasslands and seed where damaged with RE3 Coastal Reclamation (MG12 Grassland). Refer to details on sheet
- Wildflower mix of WFG18 Butterfly and Honey bee mix. Refer to details on sheet
- Proposed narrow areas of angular chippings for top dressing. Laid over a weed proof membrane.
- Approximate position of Bat boxes (1F1D 1FF 1FS) by Schweigler or similar approved
- Tarmac
- Textured flags in buff from Tobermore or similar and approved.
- Proposed block paving in brindle from Tobermore or similar and approved.



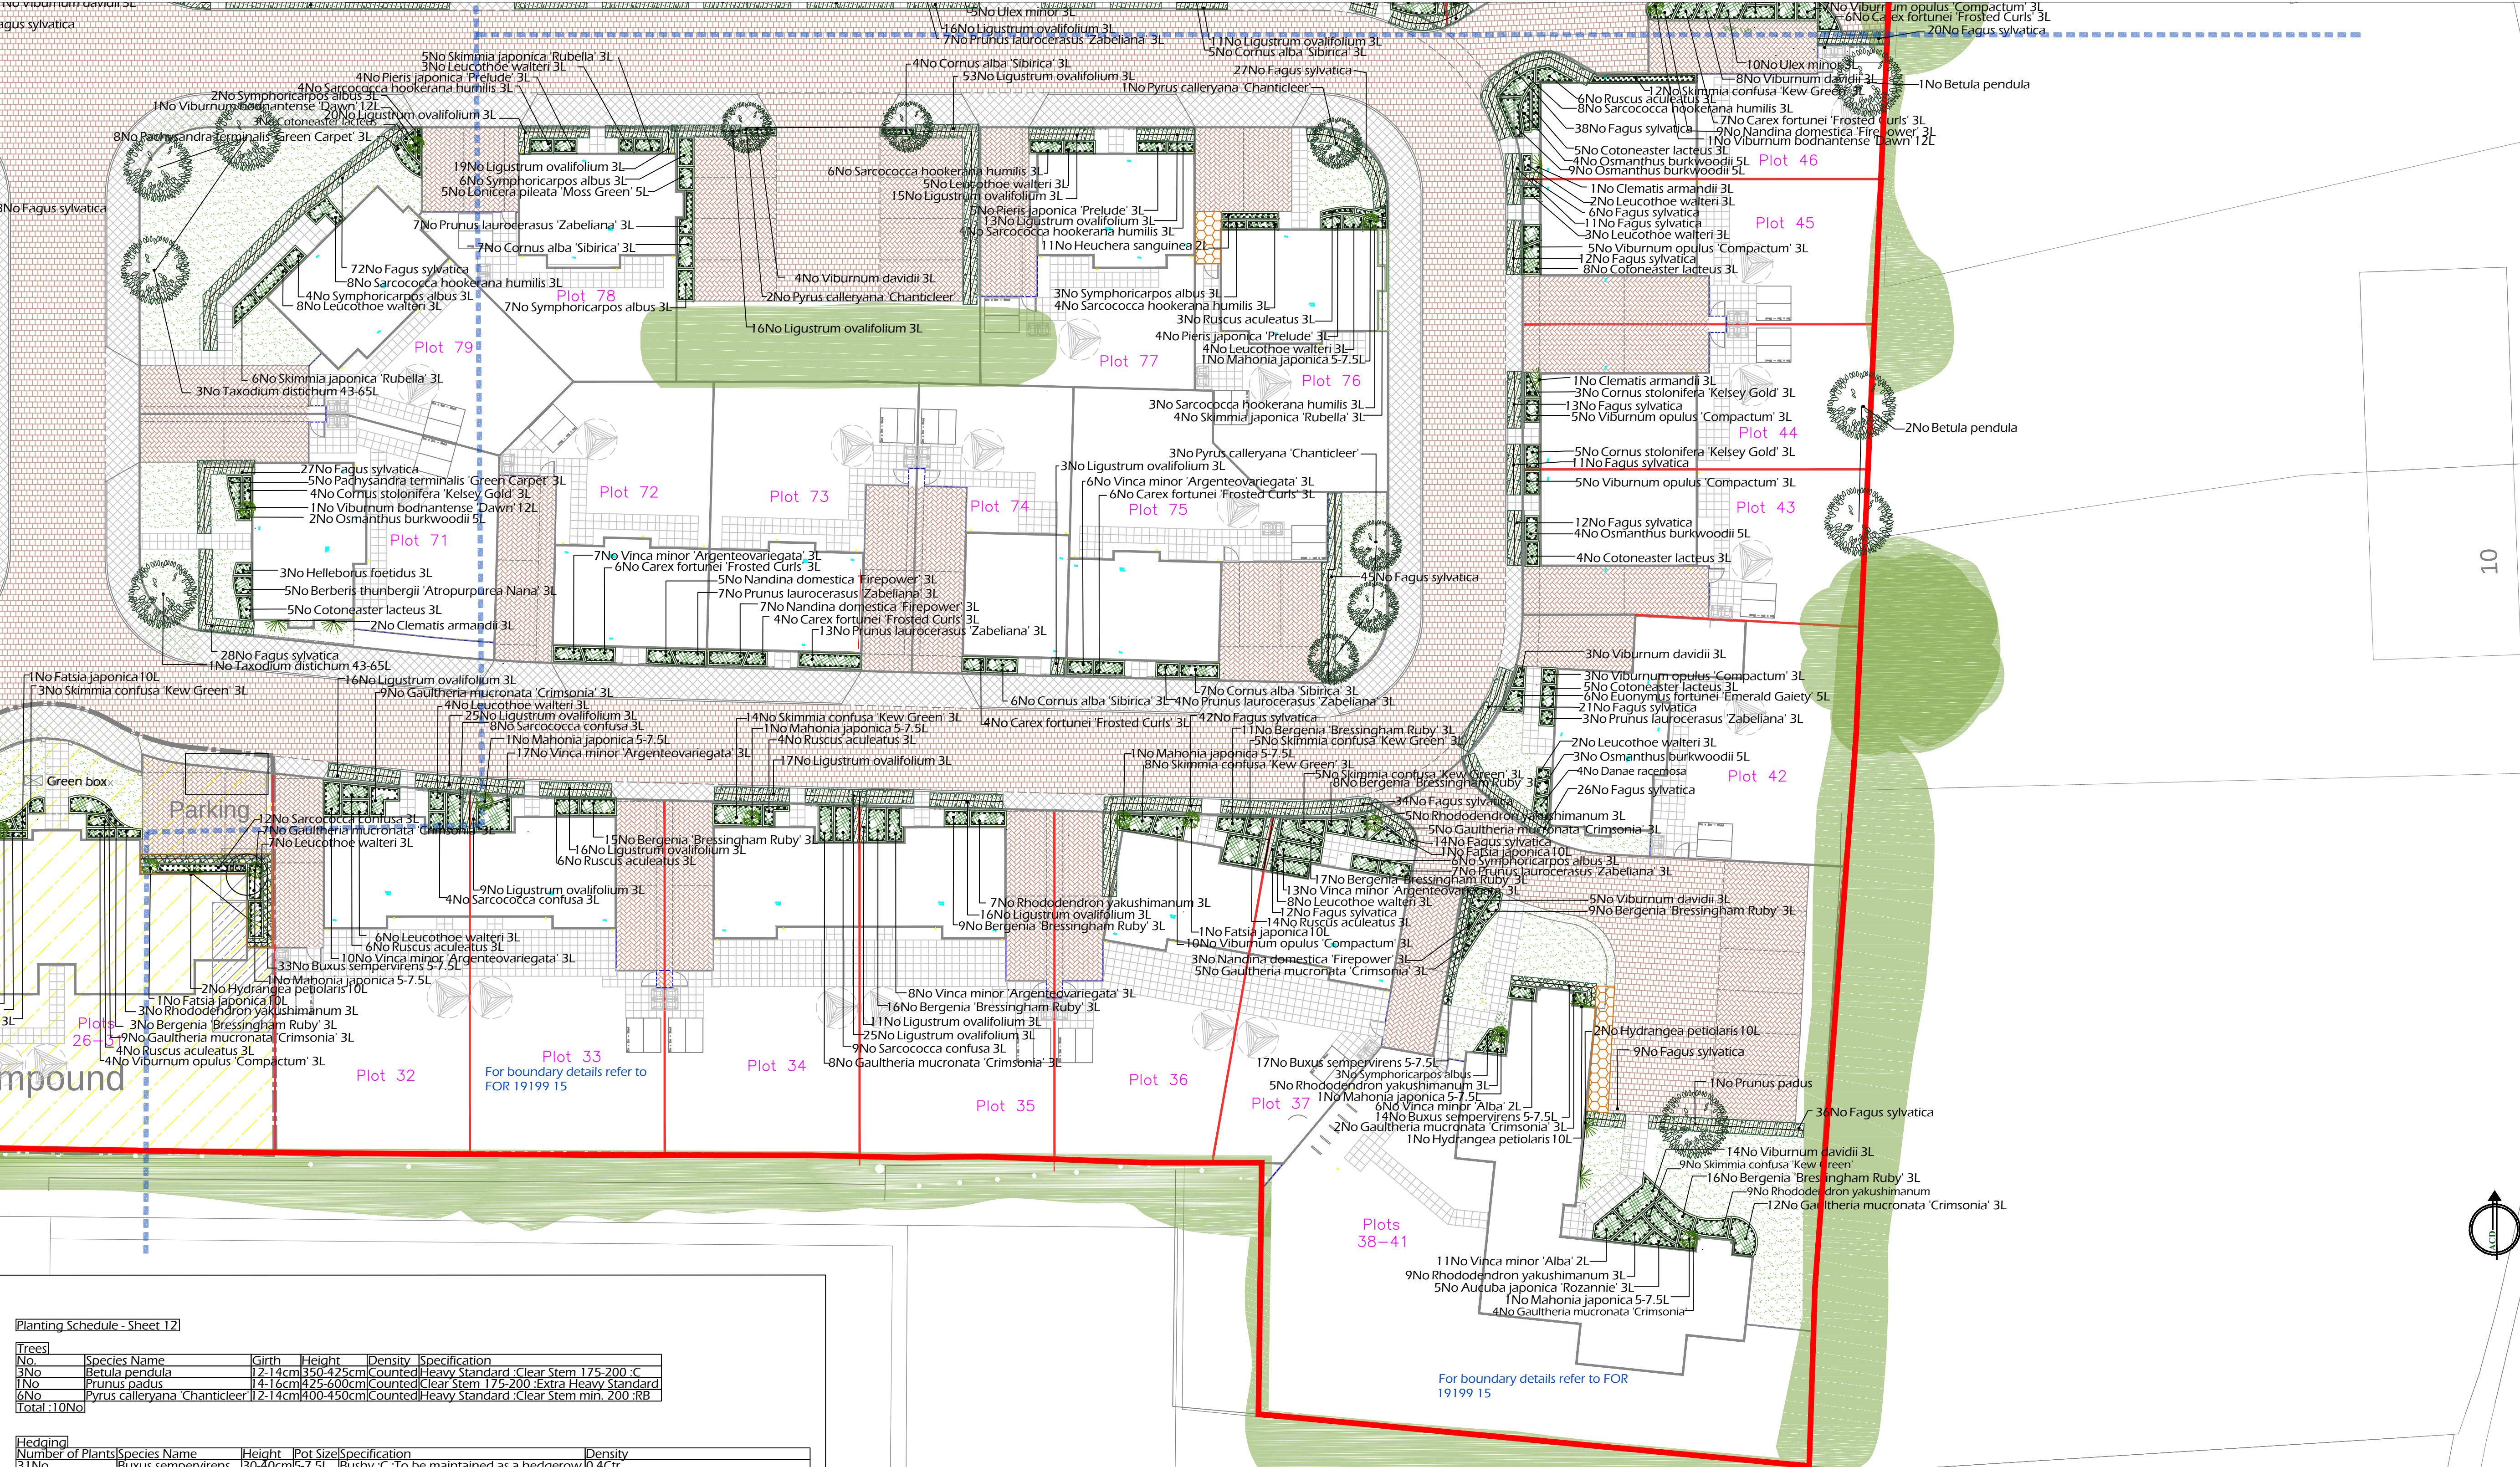

Planting Schedule - Sheet 12

Trees	No.	Species Name	Girth	Height	Density	Specification
1	No	Betula pendula	12-14cm	350-425cm	Counted	Heavy Standard 'Clear Stem 175-200' C
1	No	Prunus padus	14-16cm	425-600cm	Counted	'Clear Stem 175-200' Extra Heavy Standard
6	No	Pyrus calleryana 'Chanticleer'	12-14cm	400-450cm	Counted	'Heavy Standard 'Clear Stem min. 200' RB
Total :10No						

Hedging						
No	Number of Plants	Species Name	Height	Pot Size	Specification	Density
1	31No	Buxus sempervirens	30-40cm	5-7.5L	Bushy C To be maintained as a hedgerow	0.4ctr
36	36No	Fagus sylvatica	60-80cm		Transplant 'BR' Maintained as hedge	0.5ctr Double Staggered at 0.3m offset
20	20No	Fagus sylvatica	60-80cm		Transplant 'BR' Maintained as hedge	0.4ctr Double Staggered at 0.3m offset
18	18No	Ligustrum ovalifolium	60-80cm	3L	Bushy 5/7 brks C	0.5ctr Double Staggered at 0.3m offset
Total :605No						

Shrubs					
No.	Species Name	Height	Pot Size	Specification	Density
5No	Aucuba japonica 'Rozannie'	30-40cm	3L	Bushy	4/m ²
24No	Cornus alba 'Sibirica'	40-60cm	3L	Bushy	4/m ²
8No	Cornus stolonifera 'Kelsey Gold'	40-60cm	3L	Bushy	4/m ²
22No	Cotoneaster lacteus	40-60cm	3L	Bushy	4/m ²
6No	Euonymus fortunei 'Emerald Gaiety'	30-40cm	5L	Bushy C	4/m ²
2No	Fatsia japonica	60-80cm	10L	Leader	Counted
43No	Gaultheria mucronata 'Crimsonia'	40-60cm	3L	Bushy	4/m ²
2No	Leucothoe walteri	30-40cm	3L	Bushy	4/m ²
6No	Mahonia japonica	40-60cm	5-7.5L	Leader	Counted
15No	Nandina domestica 'Firepower'	40-60cm	3L	Bushy	4/m ²
20No	Osmanthus burkwoodii	40-60cm	5L	Bushy	4/m ²
2No	Pieris japonica 'Prelude'	20-30cm	3L	Bushy	4/m ²
34No	Prunus laurocerasus 'Zabeliana'	40-60cm	3L	Bushy	4/m ²
33No	Rhododendron yakushimanum	30-40cm	3L	Bushy	4/m ²
3No	Ruscus aculeatus	20-30cm	3L	Bushy C	4/m ²
13No	Sarcococca confusa	20-30cm	3L	Bushy C	4/m ²
25No	Sarcococca hookerana humilis	30-40cm	3L	Bushy	4/m ²
53No	Skimmia confusa 'Kew Green'	30-40cm	3L	Bushy C	4/m ²
4No	Skimmia japonica 'Rubella'	30-40cm	3L	Bushy	4/m ²
12No	Symphoricarpos albus	40-60cm	3L	C Branched	4/m ²
7No	Viburnum davidii	40-60cm	3L	Bushy	4/m ²
28No	Viburnum opulus 'Compactum'	30-40cm	3L	Bushy C	4/m ²
6No	Vinca minor 'Alba'	10-20cm	2L	Several shoots	5/m ²
51No	Vinca minor 'Argenteovariegata'	30-40cm	3L	Bushy	5/m ²
Total :490No					

Climbers					
No.	Species Name	Height	Pot Size	Specification	Density
2No	Clematis armandii	80-100cm	3L	Several Shoots	Caned Counted
3No	Hydrangea petiolaris	80-100cm	10L	Several Shoots	Counted
Total :5No					

Bamboos					
No.	Species Name	Height	Pot Size	Specification	Density
4No	Danae racemosa	30-40cm	3L	Several shoots	4/m²
Total :4No					

Herbaceous

No.	Species Name	Height	Pot Size	Specification	Density
2	No	Bergenia 'Bressingham Ruby'	3L	Full Pot	4/m²
20	No	Carex fortunei 'Frosted Curly'	3L	C	4/m²
1	No	Heuchera sanguinea	2L	C	7/m²
Total :23No					

Legend

- Existing trees and vegetation to be retained and protected during construction
- Proposed tree planting within hard landscape. See detail on sheet
- Proposed tree planting within soft landscape. See detail on sheet
- Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed low hedge to be planted in a single row at 400mm centres. Hedge to be maintained at 500mm high.
- Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height and 1.8m height adjacent to site boundaries
- Proposed mixed native hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. To be maintained at a 1.8m height.
- Proposed shrub planting to receive 75mm bark mulch.
- Proposed amenity grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Retain existing grasslands and seed where damaged with R8 Coastal Reclamation (MG12 Grassland). Refer to details on sheet
- Wildflower mix of WFG18 Butterfly and Honey bee mix. Refer to details on sheet
- Proposed narrow areas of angular chippings for top dressing. Laid over a weed proof membrane.
- Approximate position of Bat boxes (1FD 1FF 1FS) by Schwegler or similar approved
- Tarmac
- Textured flags in buff from Tobermore or similar or approved.
- Proposed block paving in brindle from Tobermore or similar or approved.

Scale bar and North arrow

0	1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	---	----

North arrow pointing up

Revision table

Rev	Date	Details	Drawn
C	26.11.14	Layout change	LS
B	19.09.14	Layout change to architects rev 14.071.101	JCL
A	20.06.14	Layout change for increased units	JCL
Rev	Date	Details	Drawn

ACD Ecology Arboriculture Landscape Architecture

ACD Landscape Architects & ACD Ecology
Rodbourne Rail Business Centre, Grange Lane, Malmesbury, Wilts, SN16 0ES
Tel: 01666 825646 Fax: 01666 824654

ACD Arboriculture
Courtyard House, Mill Lane, Godalming, Surrey, GU7 1EY
Tel: 01483 425714 Fax: 01428 641090

ACD (Landscape Architects) Southampton
12 Southgate Street, Winchester, Hampshire, SO23 9EP
Tel: 01962 855604

www.acdlandscape.co.uk

Foreman Homes

scheme: Ranelagh Rd, Havant
client: Forman Homes
drawing: Landscape Proposals
date: April 2014
scale: 1:200@A1
drawing no: FOR 19199 12C
drawn: JCL checked: AW

Copyright of ACD Landscape Architects Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2013. Copyright of this plan remains with ACD until all fees have been paid in full.

SPECIFICATION

Forestry Commission Practice note 8.

All native species should be of local stock. Native trees and shrubs certified as British Native plant stock.

All planting stock should comply with the Horticultural Trade Association National Plant specification.

All planting, preparation, handling, planting & maintenance should be in accordance with CPSE Code for Handling and Establishing plants.

All trees and shrubs to comply with BS 3936 Part 1 1992, planted to BS 4043:1989 and BS 4428:1989. All works generally, to comply with the written Soft Landscape Specification.


Topsoil incorporated into planting beds to be gently mounded towards the centre of each bed to allow for settlement.

On completion of planting the whole area of the shrub bed shall be mulched with 75mm consolidated thickness of medium textured decorative grade natural pine bark having first been prepared in accordance with the specification.

Free standing hedges shall have a 3 strand galvanised wire and tanalised softwood timber post fence, to BS 1722 Part 3:2000, erected along a line between the two rows of hedge plants.

All existing trees and hedges to be protected in accordance with BS5837:2012 for the duration of the construction period.

NOTE: DO NOT SCALE FROM DRAWING

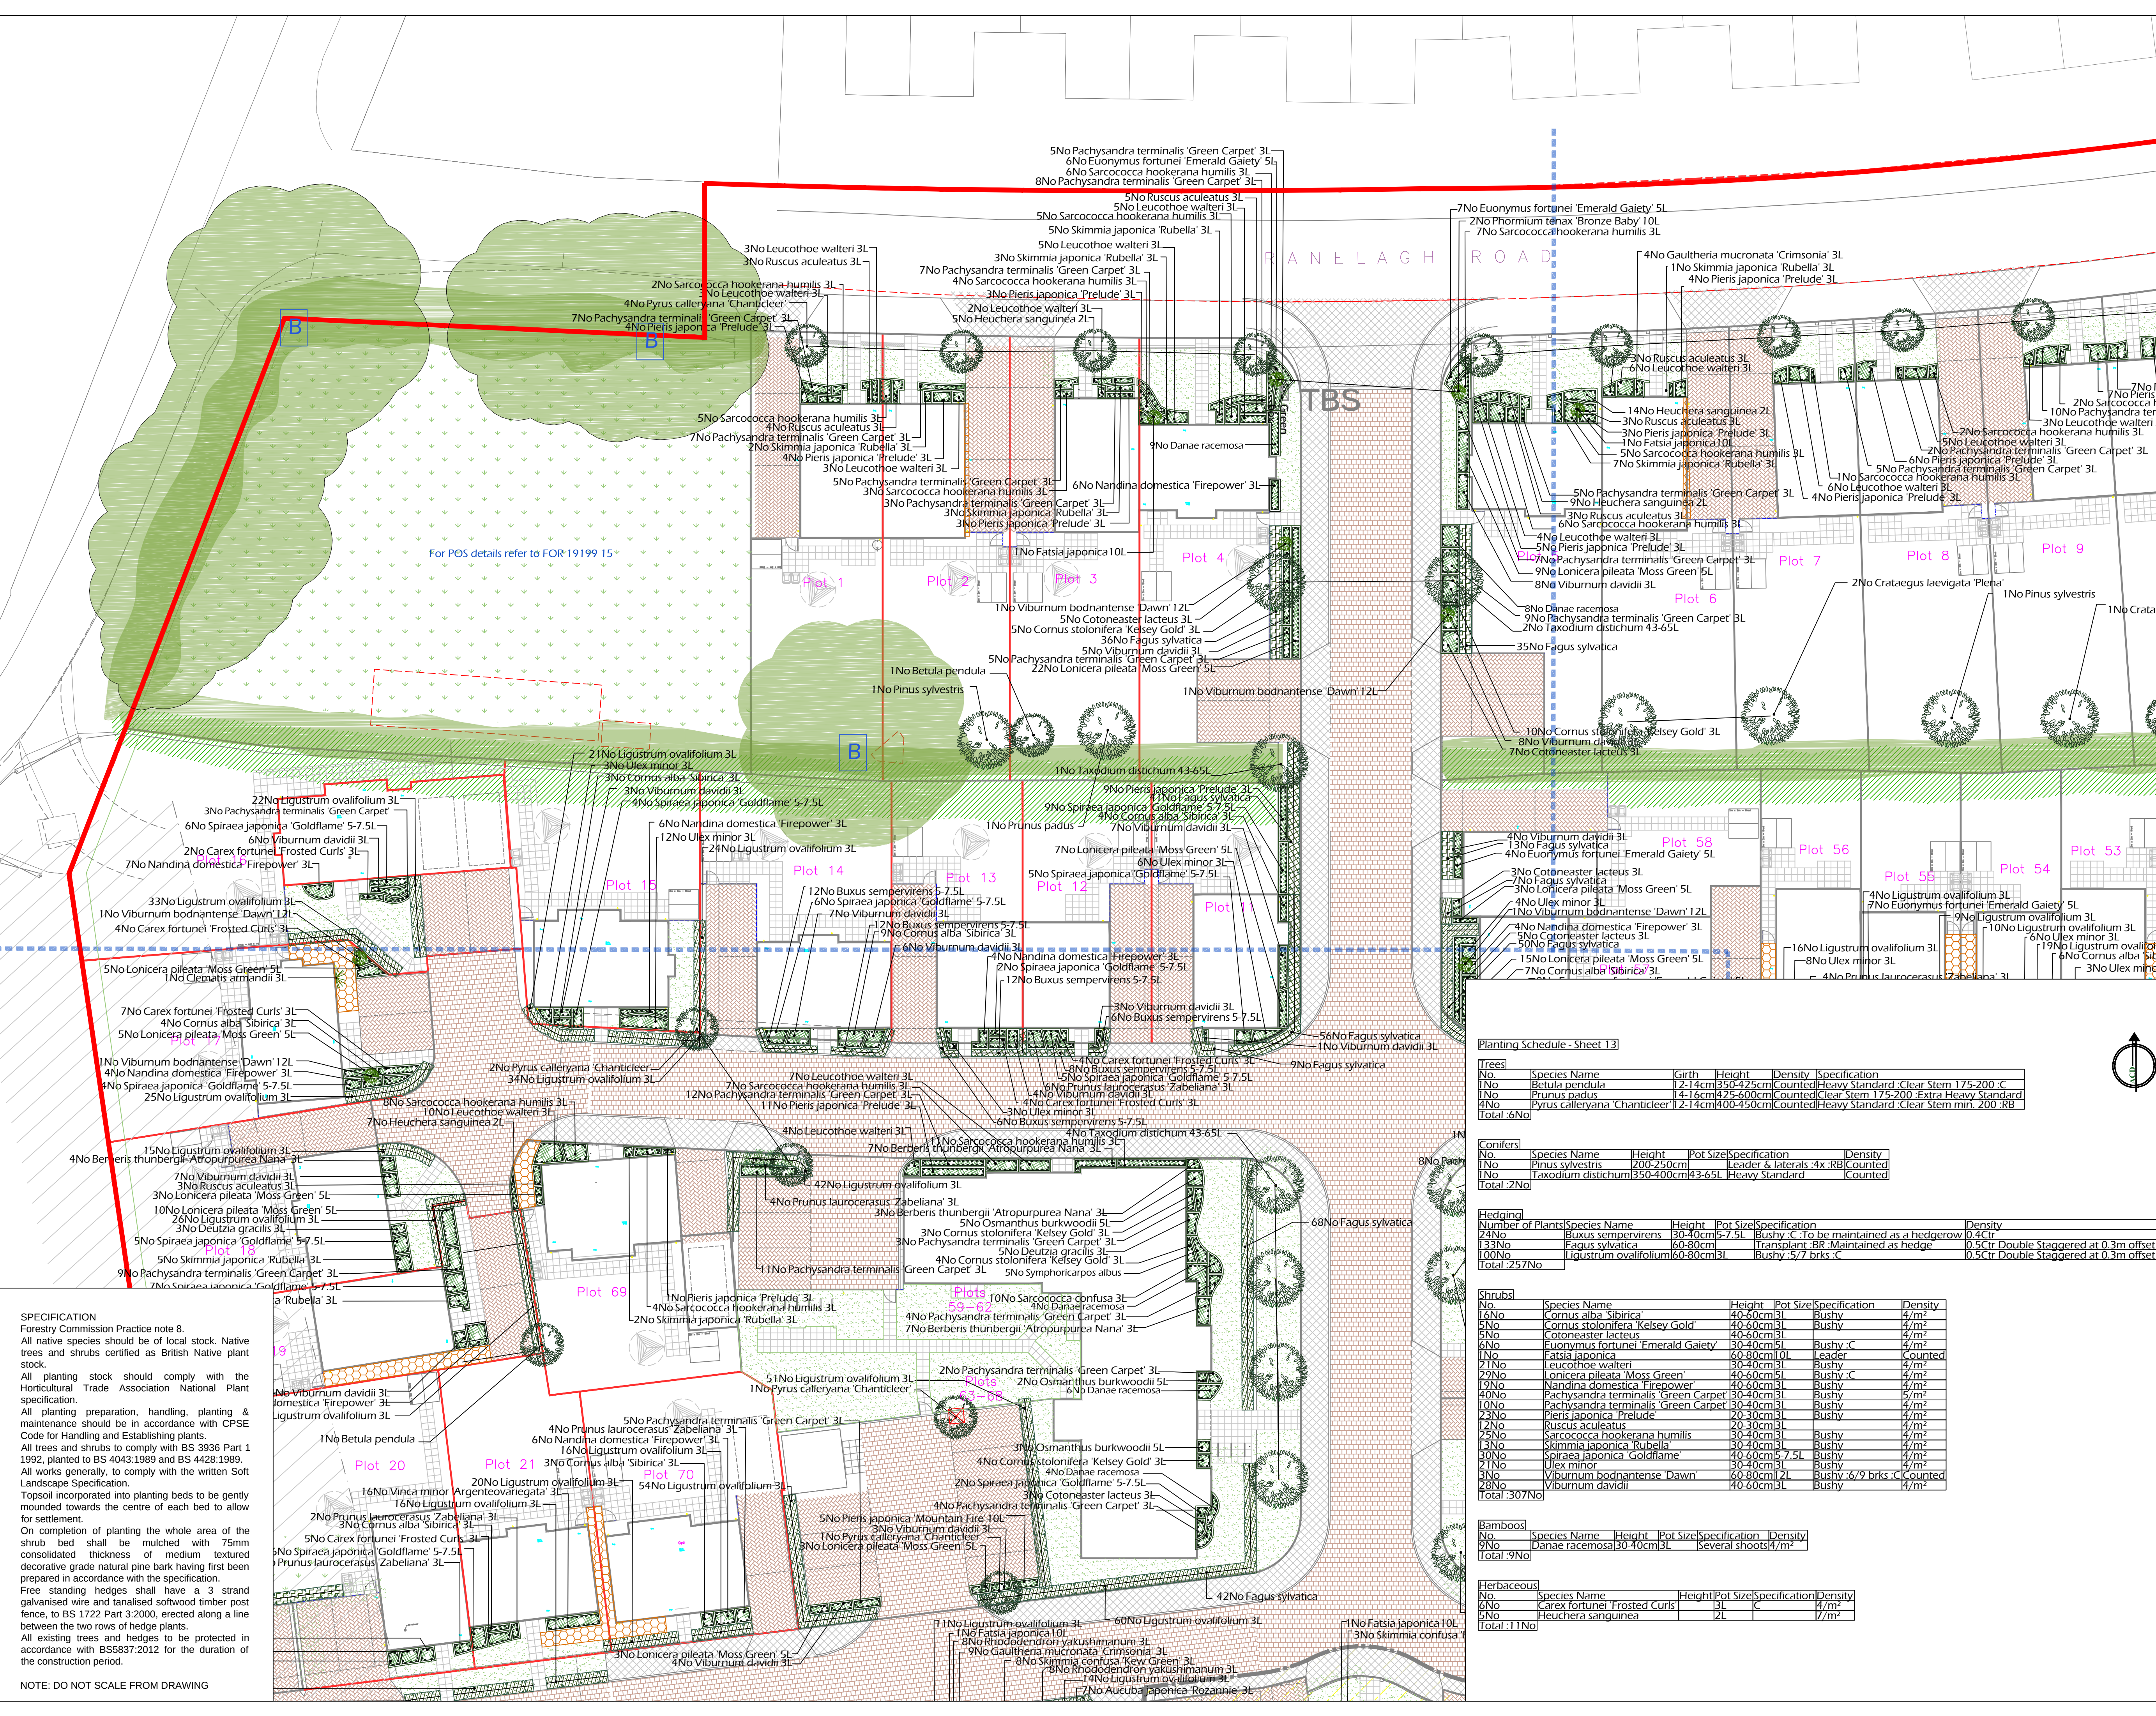

SPECIFICATION
Forestry Commission Practice note 8.
All native species should be of local stock. Native trees and shrubs certified as British Native plant stock.
All planting stock should comply with the Horticultural Trade Association National Plant specification.
All planting preparation, handling, planting & maintenance should be in accordance with CPSE Code for Handling and Establishing plants.
All trees and shrubs to comply with BS 3936 Part 1 1992, planted to BS 4043:1989 and BS 4428:1989. All works generally, to comply with the written Soft Landscape Specification.
Topsoil incorporated into planting beds to be gently mounded towards the centre of each bed to allow for settlement.
On completion of planting the whole area of the shrub bed shall be mulched with 75mm consolidated thickness of medium textured decorative grade natural pine bark having first been prepared in accordance with the specification.
Free standing hedges shall have a 3 strand galvanised wire and tanalised softwood timber post fence, to BS 1722 Part 3:2000, erected along a line between the two rows of hedge plants.
All existing trees and hedges to be protected in accordance with BS5837:2012 for the duration of the construction period.

NOTE: DO NOT SCALE FROM DRAWING

- Legend**
- Existing trees and vegetation to be retained and protected during construction
 - Proposed tree planting within hard landscape. See detail on sheet
 - Proposed tree planting within soft landscape. See detail on sheet
 - Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties
 - Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
 - Proposed low hedge to be planted in a single row at 400mm centres. Hedge to be maintained at 500mm high.
 - Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height and 1.8m height adjacent to site boundaries
 - Proposed mixed native hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. To be maintained at 1.8m height.
 - Proposed shrub planting to receive 75mm bark mulch.
 - Proposed amenity grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
 - Retain existing grasslands and seed where damaged with RE8 Coastal Reclamation (MG12 Grassland). Refer to details on sheet
 - Wildflower mix of WFG18 Butterfly and Honey bee mix. Refer to details on sheet
 - Proposed narrow areas of angular chippings for top dressing. Laid over a weed proof membrane.
 - Approximate position of Bat boxes (1FD 1FF 1FS) by Schwegler or similar approved
 - Tarmac
 - Textured flags in buff from Tobermore or similar and approved.
 - Proposed block paving in brindle from Tobermore or similar and approved.

Revision			
C	Date	Details	Drawn
C	26.11.14	Layout change	LS
B	19.09.14	Layout change to architects rev 14.07.101	JCL
A	20.06.14	Layout change for increased units	JCL
Rev	Date	Details	Drawn

ACD

Ecology Arboriculture Landscape Architecture

ACD Landscape Architects & ACD Ecology
Rodbourne Rail Business Centre, Grange Lane, Malmesbury,
Wiltshire, SN16 0ES
Tel: 01666 825646 Fax: 01666 824654

ACD Arboriculture
Courtyard House, Mill Lane, Godalming, Surrey,
GU7 1EY
Tel: 01483 425714 Fax: 01428 641090

ACD (Landscape Architects) Southampton
12 Southdown Street, Winchester, Hampshire, SO23 9EP
Tel: 01962 855604

www.acdlandscape.co.uk

scheme: Ranelagh Rd,
Havant

client: Forman Homes

drawing: Landscape Proposals

date: April 2014

scale: 1:200@A1

drawing no: FOR 19199 13C

drawn: JCL checked: AW

Copyright of ACD Landscape Architects Ltd. All rights reserved in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2013. Copyright of this plan remains with ACD until all fees have been paid in full.

Planting Schedule - Sheet 13

Trees					
No.	Species Name	Girth	Height	Density	Specification
1No	Betula pendula	2-14cm	4.5-5cm	Counted	Heavy Standard, Clear Stem 1.75-2.00 <
1No	Prunus padus	14-16cm	4.5-6.00cm	Counted	Clear Stem 1.75-2.00 Extra Heavy Standard
4No	Pyrus calleryana 'Chanticleer'	2-14cm	400-450cm	Counted	Heavy Standard, Clear Stem min. 200 RB
Total :6No					


Conifers					
No.	Species Name	Height	Pot Size	Specification	Density
1No	Pinus sylvestris	200-250cm		Leader & laterals 4x RB	Counted
1No	Taxodium distichum	350-400cm	43-65L	Heavy Standard	Counted
Total :2No					

Hedging					
Number of Plants	Species Name	Height	Pot Size	Specification	Density
24No	Buxus sempervirens	30-40cm	5-7.5L	Bushy C To be maintained as a hedgerow	0.4Ctr
133No	Fagus sylvatica	60-80cm		Transplant BB Maintained as hedge	4/m ²
100No	Ligustrum ovalifolium	60-80cm	3L	Bushy 3/7 brks C	0.5Ctr Double Staggered at 0.3m offset
Total :257No					

Shrubs					
No.	Species Name	Height	Pot Size	Specification	Density
16No	Cornus alba 'Sibirica'	40-60cm	3L	Bushy	4/m ²
6No	Cornus stolonifera 'Kelsey Gold'	40-60cm	3L	Bushy	4/m ²
4No	Cotoneaster lacteus	40-60cm	3L	Bushy	4/m ²
6No	Euonymus fortunei 'Emerald Gaiety'	30-40cm	5L	Bushy C	4/m ²
1No	Fatsia japonica	60-80cm	10L	Leader	Counted
21No	Leucothoe walteri	30-40cm	3L	Bushy	4/m ²
20No	Lonicera pileata 'Moss Green'	40-60cm	5L	Bushy C	4/m ²
19No	Nandina domestica 'Firepower'	40-60cm	3L	Bushy	4/m ²
40No	Pachysandra terminalis 'Green Carpet'	30-40cm	3L	Bushy	5/m ²
10No	Pachysandra terminalis 'Green Carpet'	30-40cm	3L	Bushy	4/m ²
23No	Pieris japonica 'Prelude'	40-60cm	3L	Bushy	4/m ²
25No	Ruscus aculeatus	40-60cm	3L	Bushy	4/m ²
25No	Sarcococca hookerana humilis	30-40cm	3L	Bushy	4/m ²
13No	Skimmia japonica 'Rubella'	30-40cm	3L	Bushy	4/m ²
21No	Spiraea japonica 'Goldflame'	40-60cm	5-7.5L	Bushy	4/m ²
21No	Ulex minor	30-40cm	3L	Bushy	4/m ²
3No	Viburnum bodnantense 'Dawn'	60-80cm	2L	Bushy 6/9 brks C	Counted
28No	Viburnum davidii	40-60cm	3L	Bushy	4/m ²
Total :307No					

Bamboos					
No.	Species Name	Height	Pot Size	Specification	Density
6No	Danae racemosa	30-40cm	3L	Several shoots	4/m ²
Total :9No					

Herbaceous					
No.	Species Name	Height	Pot Size	Specification	Density
6No	Carex fortunei 'Frosted Curls'	3L	C		4/m ²
5No	Heuchera sanguinea	2L			7/m ²
Total :11No					

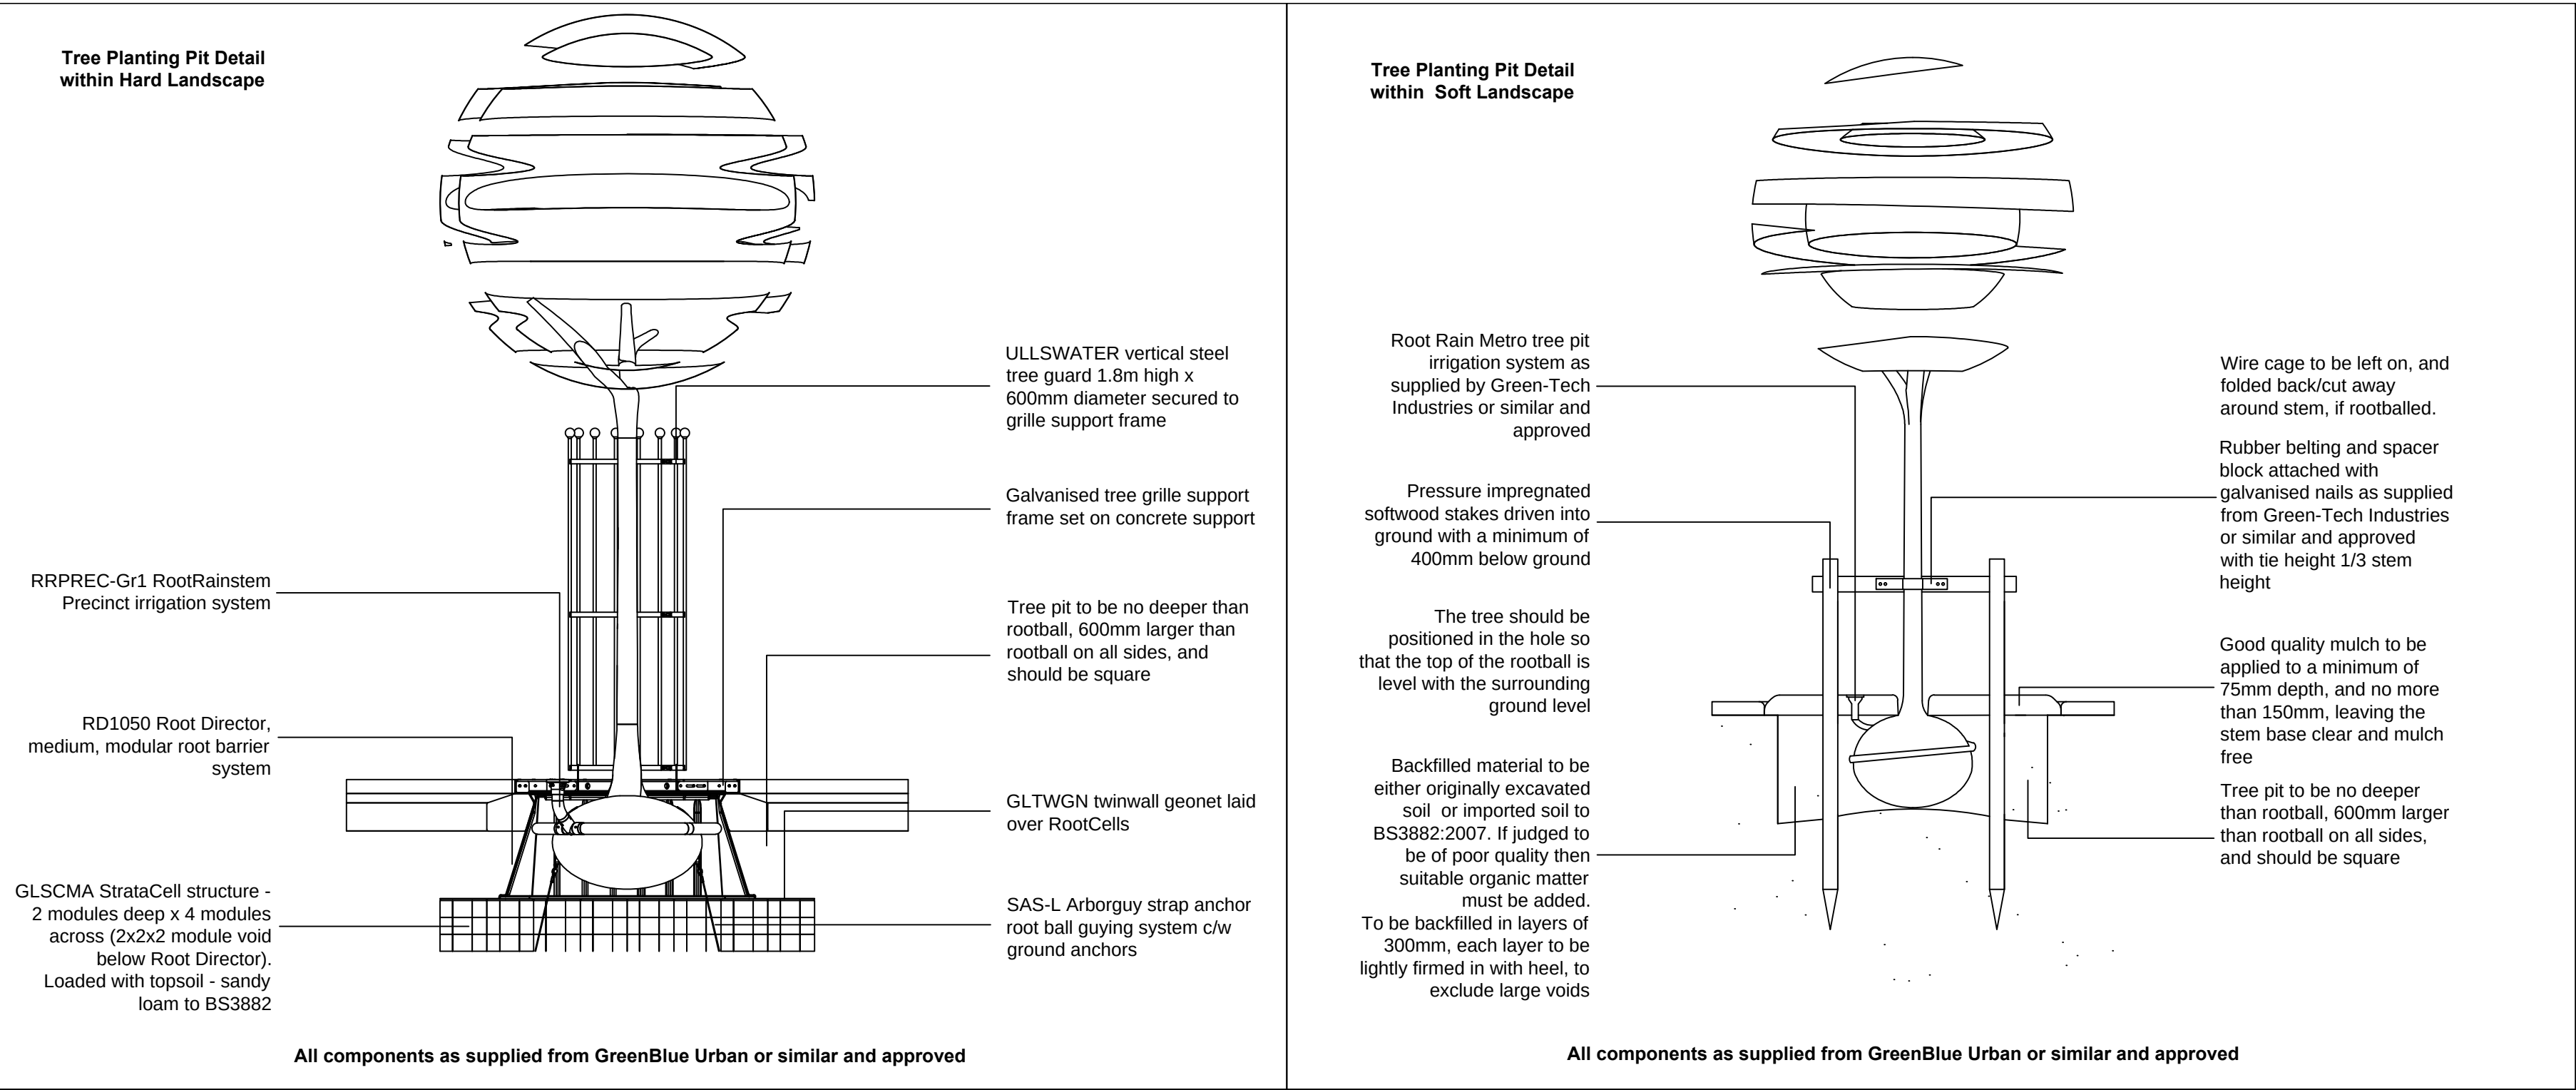

Planting Schedule - Sheet 14

Trees						
No.	Species Name	Girth	Height	Density	Specification	
6No	Betula pendula	12-14cm	350-425cm	Counted	Heavy Standard Clear Stem 175-200	C
4No	Crataegus laevigata 'Plena'	12-14cm	350-425cm	Counted	Heavy Standard Clear Stem 175-200	RB
3No	Prunus padus	14-16cm	25-600cm	Counted	Clear Stem 175-200 Extra Heavy Standard	
6No	Pyrus calleryana 'Chanticleer'	12-14cm	400-450cm	Counted	Heavy Standard Clear Stem min. 200	RB
Total :19No						

Conifers					
No.	Species Name	Height	Pot Size	Specification	Density
2No	Pinus sylvestris	200-250cm		Leader & laterals 4x	RB Counted
Total :2No					

Hedging					
Number of Plants	Species Name	Height	Pot Size	Specification	Density
28No	Buxus sempervirens	30-40cm	5-7.5L	Bushy C	To be maintained as a hedgerow 0.4Cfr
92No	Fagus sylvatica	60-80cm		Transplant BR	Maintained as hedge 0.5Cfr Double Staggered at 0.3m offset
127No	Ligustrum ovalifolium	60-80cm	3L	Bushy 5/7 brks	C 0.5Cfr Double Staggered at 0.3m offset
Total :247No					

Shrubs					
No.	Species Name	Height	Pot Size	Specification	Density
15No	Cornus alba 'Sibirica'	40-60cm	3L	Bushy	4/m ²
7No	Cornus stolonifera 'Kelsey Gold'	40-60cm	3L	Bushy	4/m ²
7No	Euonymus fortunei 'Emerald Gaiety'	30-40cm	5L	Bushy C	4/m ²
1No	Fatsia japonica	60-80cm	10L	Leader	Counted
4No	Gaultheria mucronata 'Crimsonia'	30-40cm	3L	Bushy	5/m ²
30No	Leucothoe walteri	30-40cm	3L	Bushy	4/m ²
1No	Mahonia japonica	40-60cm	5-7.5L	Leader	Counted
6No	Nandina domestica 'Firepower'	40-60cm	3L	Bushy	4/m ²
8No	Osmanthus burkwoodii	40-60cm	3L	Bushy	4/m ²
29No	Pachysandra terminalis 'Green Carpet'	30-40cm	3L	Bushy	5/m ²
34No	Pieris japonica 'Prelude'	20-30cm	3L	Bushy	4/m ²
23No	Prunus laurocerasus 'Zabeliana'	40-60cm	3L	Bushy	4/m ²
6No	Ruscus aculeatus	20-30cm	3L	Bushy	4/m ²
20No	Sarcococca hookerana humilis	30-40cm	3L	Bushy	4/m ²
8No	Skimmia japonica 'Rubella'	30-40cm	3L	Bushy	4/m ²
4No	Ulex minor	40-60cm	3L	Bushy	4/m ²
4No	Viburnum davidii	40-60cm	3L	Bushy	4/m ²
7No	Viburnum opulus 'Compactum'	30-40cm	3L	Bushy	4/m ²
Total :300No					

Herbaceous					
No.	Species Name	Height	Pot Size	Specification	Density
29No	Carex fortunei 'Frosted Curis'		3L	C	4/m ²
23No	Heuchera sanguinea		2L		7/m ²
Total :52No					

RE8 Coastal Reclamation (MG12 Grassland)

Mixture Breakdown	
Festuca arvense Tall Fescue	30%
Festuca rubra ssp. litoralis Slender Creeping Red F	20%
Cynosurus cristatus Crested Dogtail	10%
Festuca pratensis Meadow Fescue	9%
Holcus lanatus Yorkshire Fog	5%
Plantago lanceolata Ribwort Plantain	4%
Ranunculus acris Meadow Buttercup	4%
Agrostis stolonifera Creeping Bent	2.5%
Arrhenatherum elatius Tall Oat-Grass	2.5%
Iris pseudacorus Yellow Flag Iris	2%
Taraxacum officinale Dandelion	2%
Trifolium pratense Red Clover	2%
Trifolium repens White Clover	1.5%
Lotus corniculatus Birdsfoot Trefoil	1%
Anthoxanthum odoratum Sweet Vernal Grass	1%
Plantago major Greater Plantain	0.25%
Vicia cracca Tufted Vetch	0.25%
Hypochaeris radicata Cat's Ear	
Leontodon autumnale Autumn Hawkbit	

SPECIFICATION

Forestry Commission Practice note 8.

All native species should be of local stock. Native trees and shrubs certified as British Native plant stock.

All planting stock should comply with the Horticultural Trade Association National Plant specification.

All planting preparation, handling, planting & maintenance should be in accordance with CPSE Code for Handling and Establishing plants. All trees and shrubs to comply with BS 3936 Part 1 1992, planted to BS 4043:1989 and BS 4428:1989. All works generally, to comply with the written Soft Landscape Specification.

Topsoil incorporated into planting beds to be gently mounded towards the centre of each bed to allow for settlement.

On completion of planting the whole area of the shrub bed shall be mulched with 75mm consolidated thickness of medium textured decorative grade natural pine bark having first been prepared in accordance with the specification.

Free standing hedges shall have a 3 strand galvanised wire and tanalised softwood timber post fence, to BS 1722 Part 3:2000, erected along a line between the two rows of hedge plants.

All existing trees and hedges to be protected in accordance with BS5837:2012 for the duration of the construction period.

NOTE: DO NOT SCALE FROM DRAWING

Legend

Existing trees and vegetation to be retained and protected during construction

Proposed tree planting within hard landscape. See detail on sheet

Proposed tree planting within soft landscape. See detail on sheet

Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties.

Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting

Proposed low hedge to be planted in a single row at 400mm centres. Hedge to be maintained at 500mm high.

Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height and 1.8m height adjacent to site boundaries

Proposed mixed native hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. To be maintained at 1.8m height.

Proposed shrub planting to receive 75mm bark mulch.

Proposed amenity grass areas to receive good quality amenity grass turves laid in line with good horticultural practices

Retain existing grasslands and seed where damaged with RE8 Coastal Reclamation (MG12 Grassland). Refer to details on sheet

Wildflower mix of WFG18 Butterfly and Honey bee mix. Refer to details on sheet

Proposed narrow areas of angular chippings for top dressing. Laid over a weed proof membrane.

Approximate position of Bat boxes (1FD 1FF 1FS) by Schweigler or similar approved

Tarmac

Textured flags in buff from Tobermore or similar and approved.

Proposed block paving in brindle from Tobermore or similar and approved.

ACD
Ecology
Arboriculture
Landscape Architecture

ACD Landscape Architects & ACD Ecology
Rodbourne Rail Business Centre, Grange Lane, Malmesbury,
Wiltshire, SN16 0ES
Tel: 01666 825646 Fax: 01666 824654

ACD Arboriculture
Courtney House, Mill Lane, Godalming, Surrey,
GU7 1EY
Tel: 01483 425714 Fax: 01428 641090

ACD (Landscape Architects) Southampton
12 Southgate Street, Winchester, Hampshire, SO23 9EP
Tel: 01962 855604

www.acdlandscape.co.uk

Foreman
Homes

scheme: Ranelagh Rd,
Havant
client: Forman Homes
drawing: Landscape Proposals
date: April 2014
scale: 1:200@A1
drawing no: FOR 19199 14C
drawn: JCL checked: AW

Copyright of ACD Landscape Architects Ltd. All rights reserved in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2013. Copyright of this plan remains with ACD until all fees have been paid in full.



Legend

Landscape to be maintained by management company

A	26.11.14	Layout change	LS
Rev	Date	Details	Drawn

ACD

Ecology
Arboriculture
Landscape Architecture

ACD Landscape Architects & ACD Ecology
Rodbourne Rail Business Centre, Grange Lane, Malmesbury,
Wilts, SN16 0ES
Tel: 01666 825646 Fax: 01666 824654

ACD Arboriculture
Courtyard House, Mill Lane, Godalming, Surrey,
GU7 1EY
Tel: 01483 425714 Fax: 01428 641090

ACD (Landscape Architects) Southampton
12 Southgate Street, Winchester, Hampshire, SO23 9EP
Tel: 01962 855604

www.acdlandscape.co.uk



scheme: Ranelagh Rd,
Havant
client: Forman Homes
drawing: Management plan
date: April 2014
scale: NTS/A1
drawing no: FOR 19199 50A
drawn: JCL checked: AW

Copyright of ACD Landscape Architects Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2013. Copyright of this plan remains with ACD until all fees have been paid in full.