

Legend

Tree Survey and Tree Categorisation carried out in accordance with: BS 5837:2012 'Trees in relation to design, demolition and construction. Recommendations' please see AAA Tree survey drawing & associated tree survey schedule.

Refer to AAA Tree Survey Schedule Ref: AAA ref 779 : 15/12/09 & 779B : 1.2.3/09/10. (see key below).


Tree Species

Key	Name	Common Name
Ac	Acer campestre	Field Maple
Ag	Alnus glutinosa	Common Alder
ApCK	Acer platanoides 'Crimson King'	Crimson King
Bp	Betula pendula	Silver Birch
Ca	Corulus avellana	Common Hazel
Cb	Corpinus betulus	Hornbeam
Cm	Crotaegus monogyna	Common Hawthorn
Csp	Corus species	Dogwood species
Fe	Fragaria vesicaria	Common Ash
fs	Fagus sylvatica	Common Beech
Ma	Malus domestica	Apple
Pa	Prunus avium	Wild Cherry / Gean


Tree species continued...		
Pp	Prunus padus	Bird Cherry
Ps	Pinus sylvestris	Scots Pine
Qr	Quercus robur	Common Oak
Sal	Salix alba	White Willow
Scv	Sorbus aria variety	Whitebeam
Sc	Salix caprea	Goat Willow
Ssp	Salix species	Willow species
Txe	Tilia x europaea	Common Lime

Notes:

- Drawing to be read in conjunction with Arboricultural Report for details of Arboricultural Impact assessment, tree protection plan & method statements

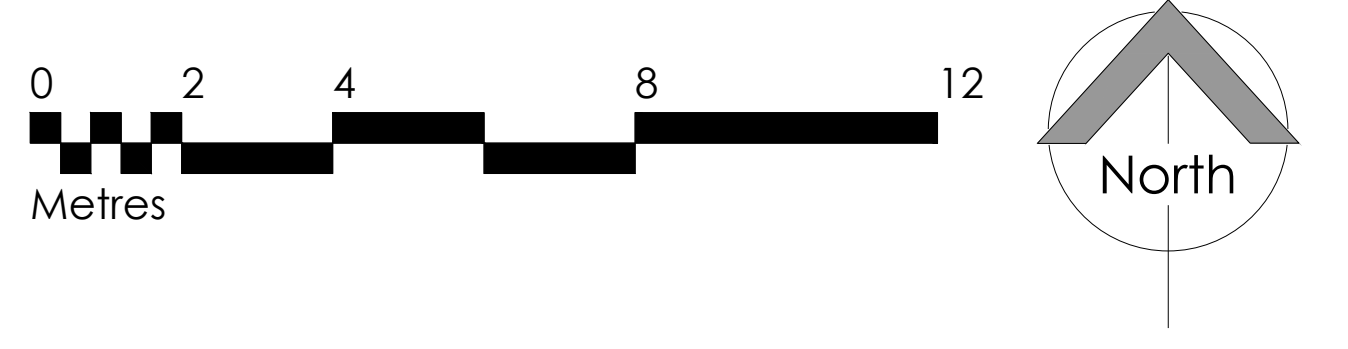

Note:
To be read with AAA dwgs no's:
• 779B-10
• 779B-12
• 779B-13
• 779B-15

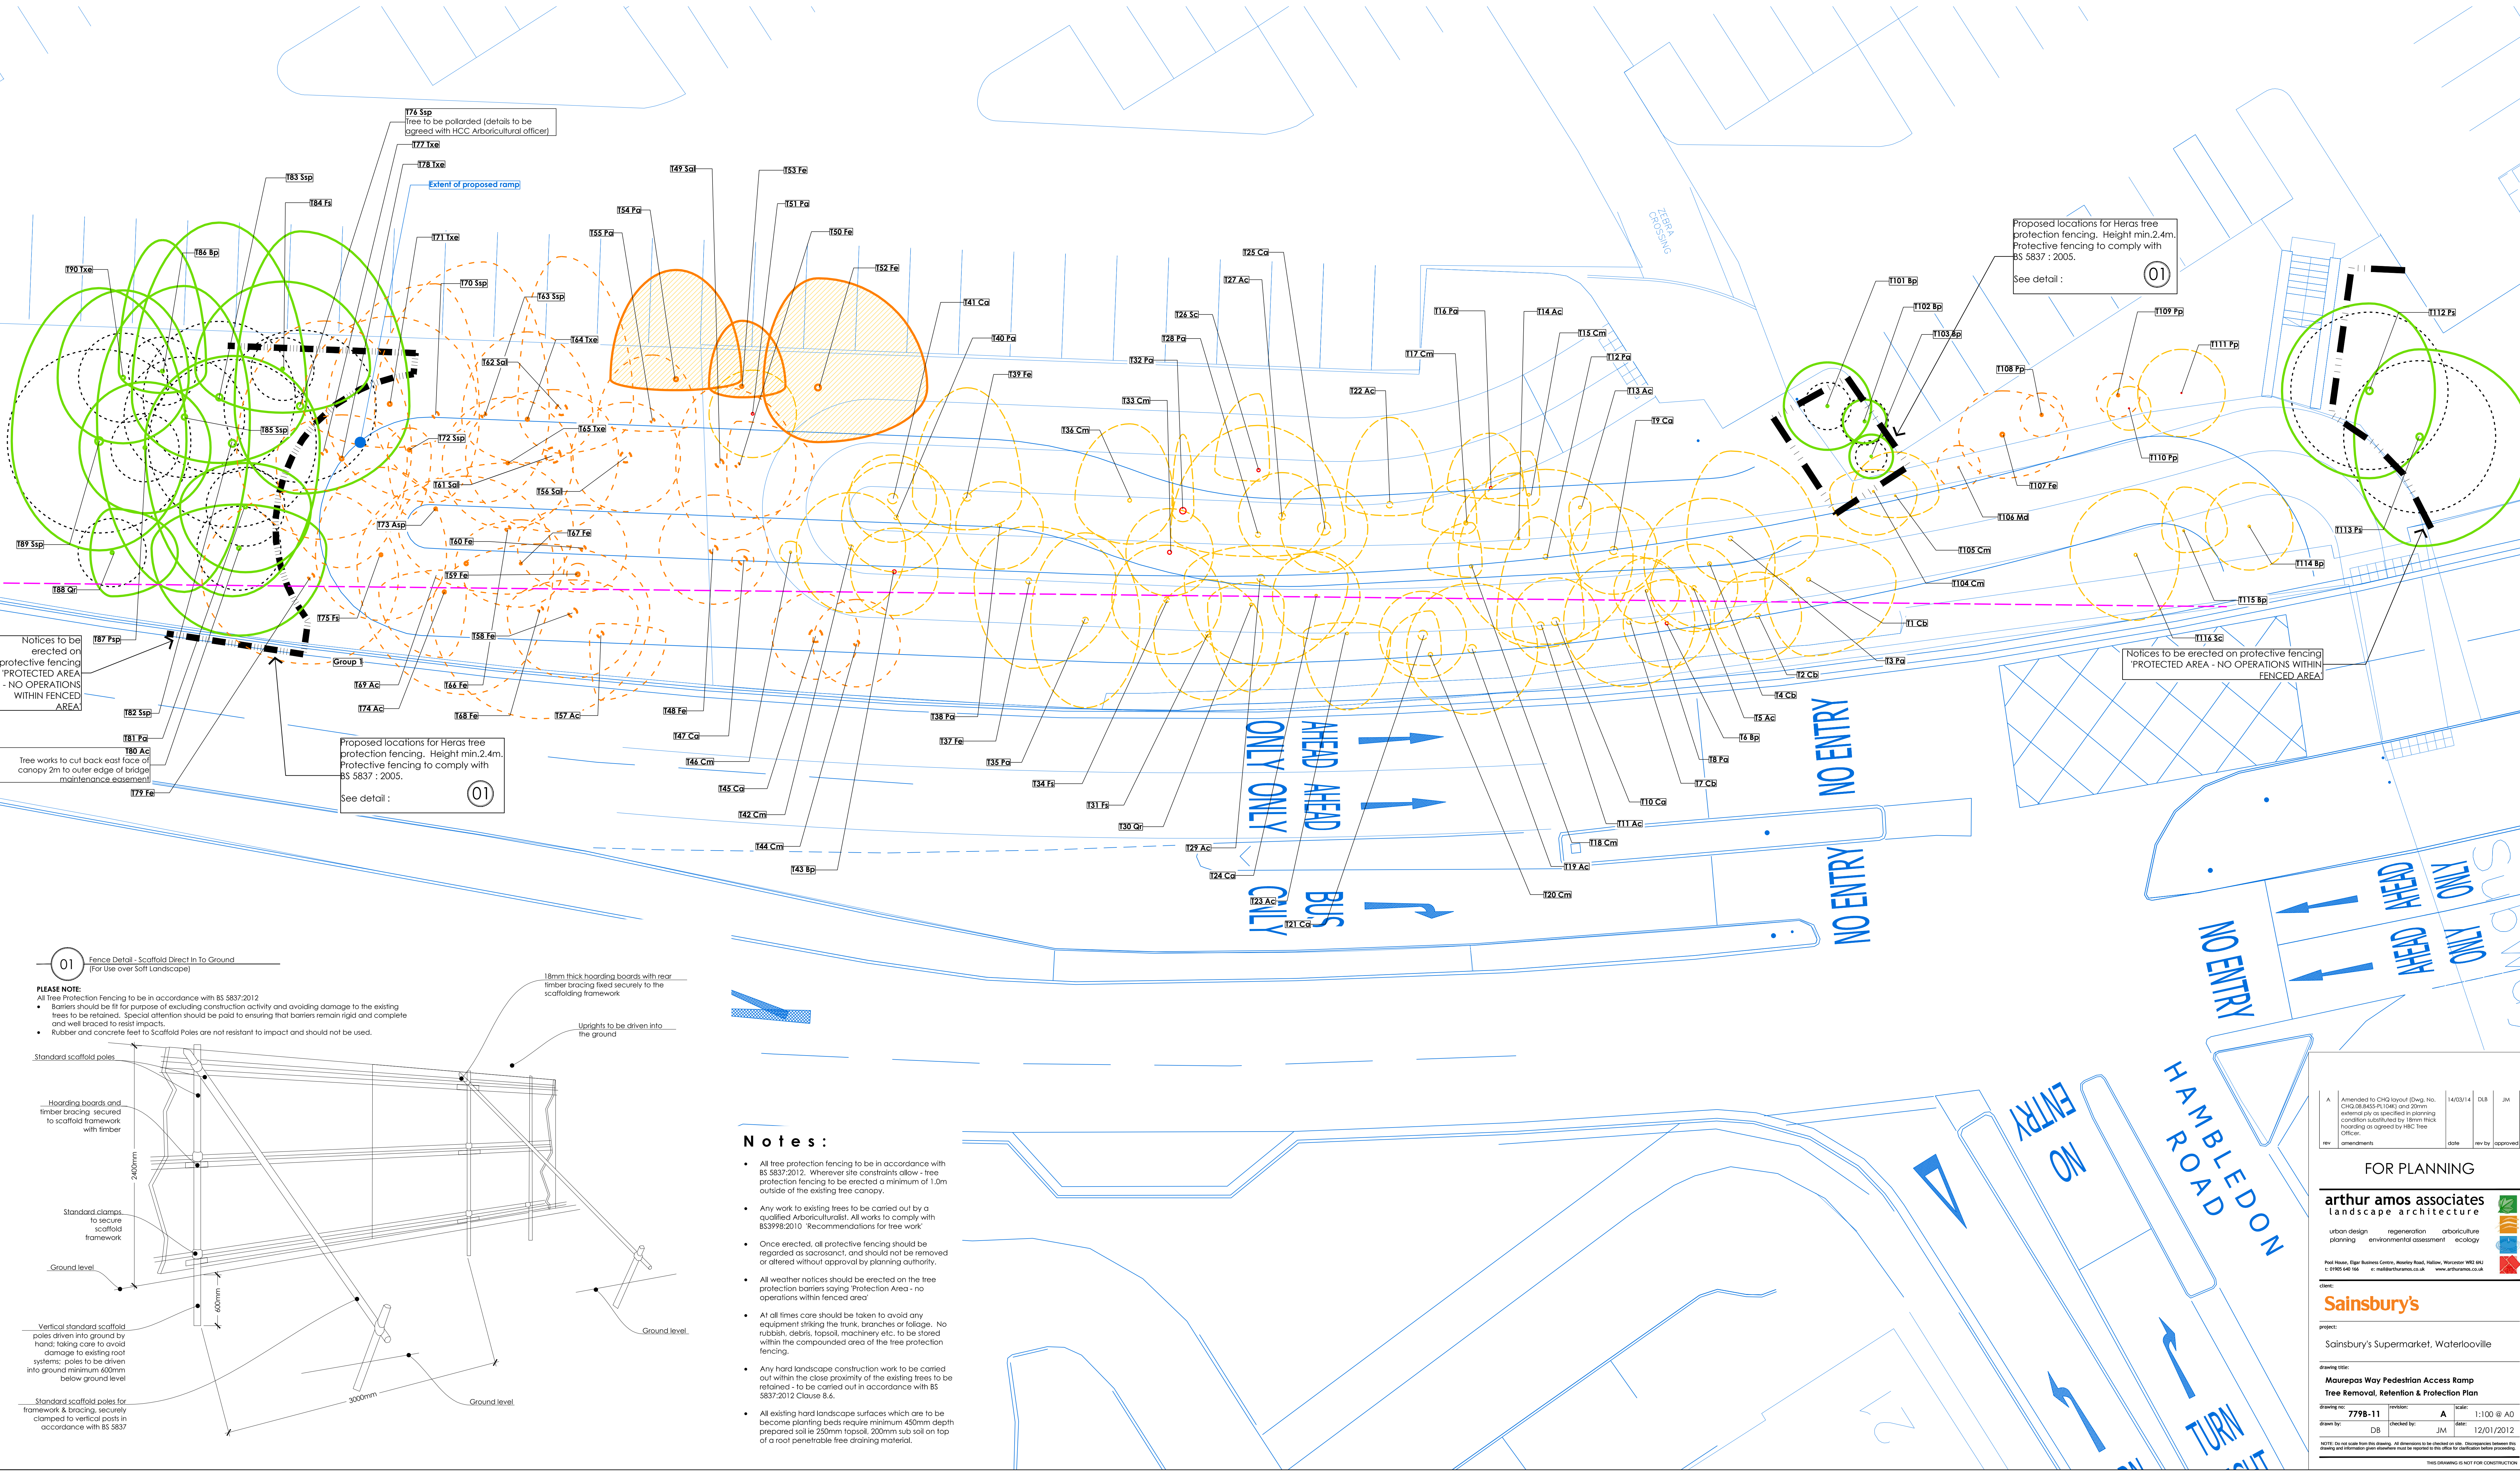

Notes:

- All tree protection fencing to be in accordance with BS 5837:2012. Wherever site constraints allow - tree protection fencing to be erected a minimum of 1.0m outside of the existing tree canopy.
- Any work to existing trees to be carried out by a qualified Arboriculturalist. All works to comply with BS3998:2010 'Recommendations for tree work'
- Once erected, all protective fencing should be regarded as sacrosanct, and should not be removed or altered without approval by planning authority.
- All weather notices should be erected on the tree protection barriers saying 'Protection Area - no operations within fenced area'
- At all times care should be taken to avoid any equipment striking the trunk, branches or foliage. No rubbish, debris, topsoil, machinery etc, to be stored within the compounded area of the tree protection fencing.
- Any hard landscape construction work to be carried out within the close proximity of the existing trees to be retained - to be carried out in accordance with BS 5837:2012 Clause 8.6.
- All existing hard landscape surfaces which are to become planting beds require minimum 450mm depth prepared soil ie 250mm topsoil, 200mm sub soil on top of a root penetrable free draining material.

A	Amended to CHG layout (Dwg. No. CHG2014/01/14) and 20mm external ply as specified in planning condition substituted by 18mm thick hoarding as agreed by HCC Tree Officer.	14/03/14	DLB	JM
rev	amendments	date	rev by	approved

FOR PLANNING

arthur amos associates
landscape architecture

urban design regeneration arboriculture
planning environmental assessment ecology

Paul Hearn, Roger Hearn, Martin Hearn, Neil Hearn, Michael Hearn, Mark Hearn
t: 01905 645 166 e: mail@arthuramos.co.uk www.arthuramos.co.uk

client:
Sainsbury's

project:
Sainsbury's Supermarket, Waterlooville

drawing title:
**Maurepas Way Pedestrian Access Ramp
Tree Removal, Retention & Protection Plan**

drawing no: **779B-11** revision: **A** scale: **1:100 @ A0**
drawn by: **DLB** checked by: **JM** date: **12/01/2012**

NOTE: The red outline from this drawing is to be used for the final plan. Designers should ensure the drawing and information given elsewhere must be repeated in this office for circulation before proceeding.

THIS DRAWING IS NOT FOR CONSTRUCTION