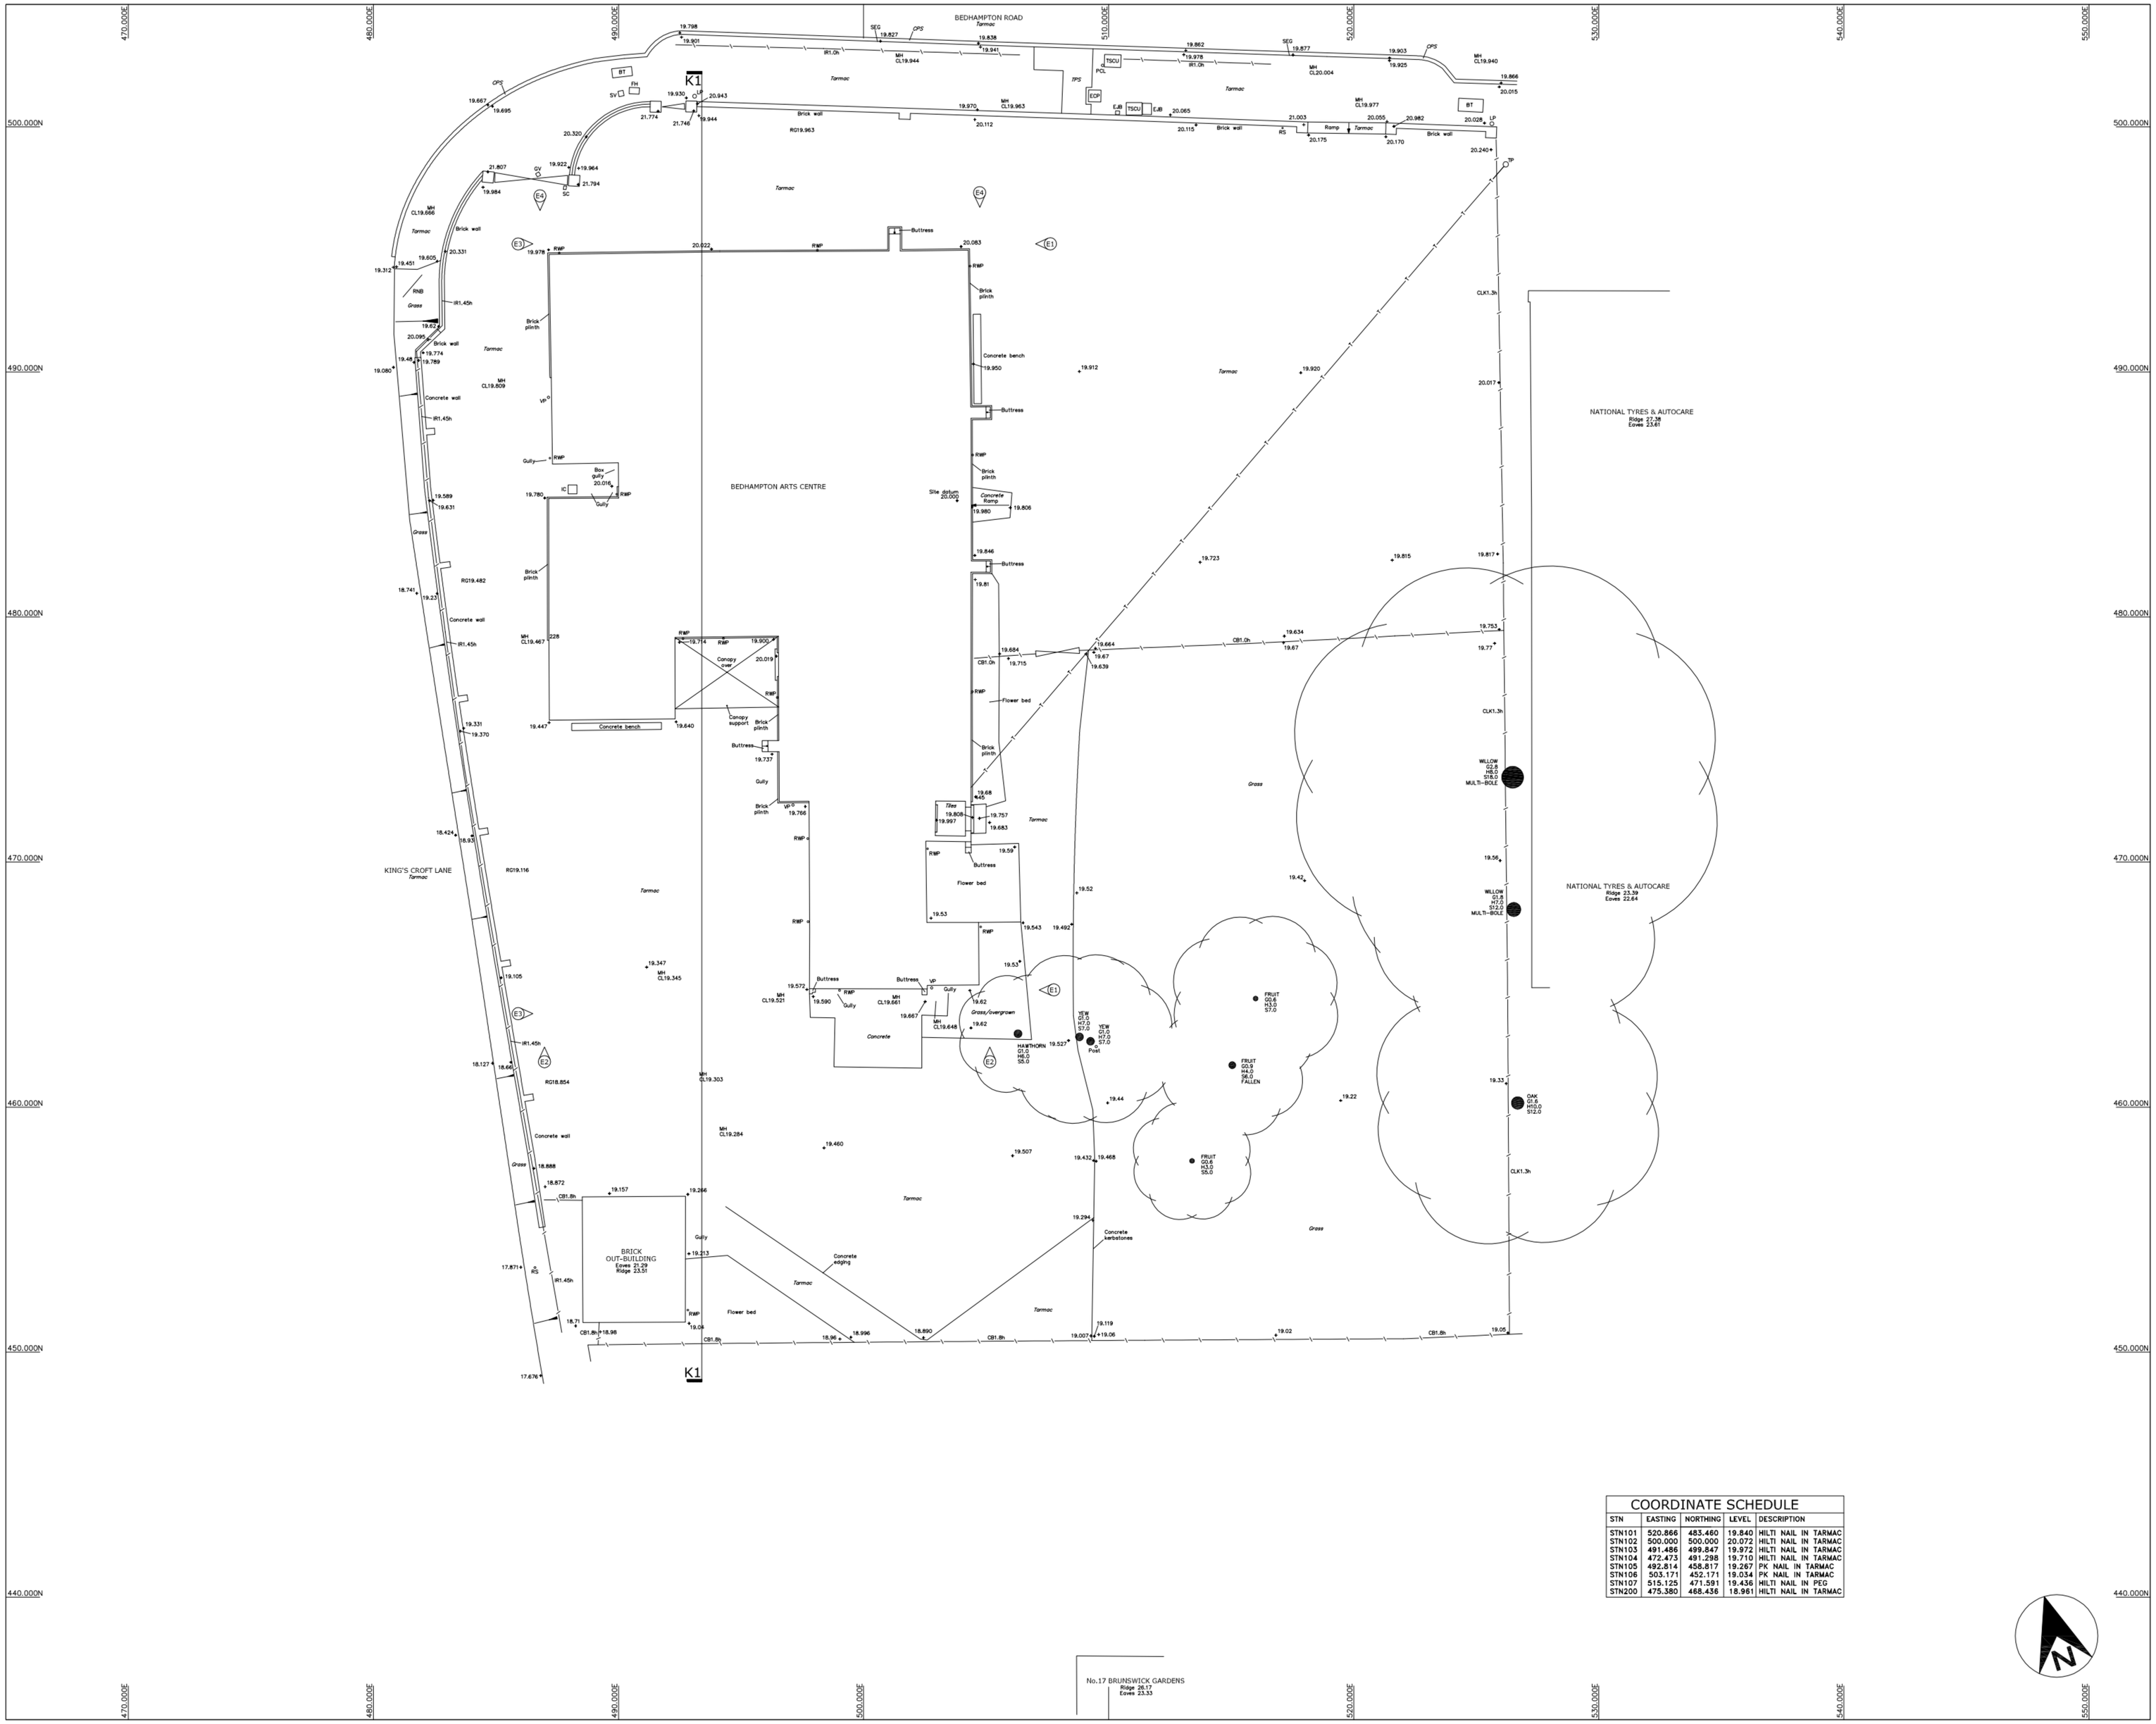

COORDINATE SCHEDULE

STN	EASTING	NORTHING	LEVEL	DESCRIPTION
STN101	520.866	483.460	19.840	HILTI NAIL IN TARMAC
STN102	500.000	500.000	20.072	HILTI NAIL IN TARMAC
STN103	491.486	499.847	19.972	HILTI NAIL IN TARMAC
STN104	472.473	491.298	19.710	HILTI NAIL IN TARMAC
STN105	492.814	458.817	19.267	PK NAIL IN TARMAC
STN106	503.171	452.171	19.034	PK NAIL IN TARMAC
STN107	515.125	471.591	19.436	HILTI NAIL IN PEG
STN200	475.380	488.436	18.961	HILTI NAIL IN TARMAC

LEGEND

SURVEY STATION
BENCH MARK
STEP UP
76.72 LEVEL POSITION
BANKING
SLOPING CEILING
SLOPING MASONRY
FENCE
GATES
HEDGE
TREE G = Girth H = Height S = Spread
FOUL DRAINAGE (100mm Pipe)
SAPLING
STORM DRAINAGE (100mm Pipe)
ELECTRICITY O/H
TELECOM O/H
ELECTRICITY U/G
TELECOM U/G
SOLID WALL / BUILDING LINE
WATER MAIN
ARCHED CEILING
GAS
ELEVATION
FLOORBOARD DIRECTION
SECTION
ANGLED FACE

FENCE TYPES AND ABBREVIATIONS

BW	BARBED WIRE	IR	IRON RAILINGS
CB	CLOSE BOARDED	PR	POST & RAIL
CI	CORRUGATED IRON	PW	POST & WIRE
CLK	CHAIN LINK	OB	OPEN BOARDED
CPG	CHESTNUT PALING	WM	WIRE MESH

LEVELS AND HEIGHTS

ASL	ARCH SPRINGER LEVEL	as	ARCH SPRINGER HEIGHT
AHL	ARCH HEAD LEVEL	ah	ARCH HEAD HEIGHT
BSL	BEAM SOFFIT LEVEL	b	BEAM SOFFIT HEIGHT
CSL	CEILING SOFFIT LEVEL	c	CEILING SOFFIT HEIGHT
DHL	DOOR HEAD LEVEL	cp	CLAD BEAM HEIGHT
IL	INVERT LEVEL	d	DOOR HEAD HEIGHT
LL	LANDING LEVEL	fc	FALSE CEILING HEIGHT
FCSL	FALSE CEILING LEVEL	s	SOFFIT HEIGHT
FL	FLOOR LEVEL	ws	WINDOW SILL HEIGHT
SL	SOFFIT LEVEL	wh	WINDOW HEAD HEIGHT
TL	THRESHOLD LEVEL		
WSL	WINDOW SILL LEVEL	*PLEASE NOTE: ALL HEIGHTS TAKEN FROM*	
WHL	WINDOW HEAD LEVEL	*FLOOR/LANDING UNLESS OTHERWISE STATED.*	

ABBREVIATIONS (Where Applicable)

AB	AIR BRICK	NFI	NO FURTHER INFORMATION
BOL	BOLLARD	O/H	OVERHEAD
BRW	BRICK WALL	PCL	PEDESTRIAN CROSSING LIGHT
BT	BRITISH TELECOM	RG	ROAD GULLY
CATV	CABLE TELEVISION COVER	RNB	ROAD NAME BOARD
CE	CLEARING EYE	RS	ROAD SIGN
CL	COVER LEVEL	RW	RETAINING WALL
CPS	CONC PAVING SLABS	RWP	RAINWATER PIPE
DP	DOWN PIPE	SEG	SIDE ENTRY GULLY
ECP	ELECTRICITY CABLE PIT	SC	STOP COCK
EJB	ELECTRICITY JUNCTION BOX	SV	STOP VALVE
FH	FIRE HYDRANT	T	TRUNKING
G	GULLY	TSCU	TRAFFIC SIGNAL CONTROL UNIT
GVC	GAS STOP COCK	TDO	TRAP DOOR OVER
GV	GAS VALVE	TL	TRAFFIC LIGHT
IC	INSPECTION COVER	TP	TELEGRAPH POLE
LP	LAMP POST	TPS	TACTILE PAVING SLABS
MH	MANHOLE	V	VENT
MKR	MARKER	VP	VENT PIPE
NB	NOTICE BOARD	W	WINDOW
		WH	WATER METER
		WP	WASTE PIPE

LEVELS

DATUM: ARBITRARY

LEVELS BASED ON FLOOR LEVEL IN NORTH-EAST ROOM. VALUE 20.000m (SEE PLAN).

SERVICE INFORMATION

DRAINAGE:
ELECTRICITY:
GAS:
TELECOM:
WATER:

While all reasonable care has been taken in locating the underground services shown on this plan the completeness and accuracy of the information cannot be guaranteed. Users are advised to satisfy themselves on site before connections are made.

GRAND HOLDINGS LTD

BEDHAMPTON ARTS CENTRE
29 BEDHAMPTON ROAD
HAVANT PO9 3ET

SITE SURVEY

SCALE: 1:100	SHEET SIZE: B1	DRAWING: 1 OF 1
JOB No. M1213	SURVEYOR: RTG	DRAWN: RTG
	CHECKED: SPH	DATE: FEB 2012

SCALE BAR
0 1m 5m 10m

REV SUFF.	DATE	INIT	REVISION DETAILS

The MEON SURVEY Partnership
Specialists in Architectural and Land Surveys
Campbell Park, Fernhurst Road,
Milland, Liphook, Hampshire, GU30 7LU
TEL.01428 741699 FAX.01428 741466
Email: mail@meonsurvey.co.uk
Web: http://www.meonsurvey.co.uk

PDF Created with deskPDF PDF Writer - Trial :: http://www.docudesk.com