SPECIFICATION

Forestry Commission Practice note 8.

All native species should be of local stock. Native trees and shrubs certified as British Native plant stock.

All planting stock should comply with the Horticultural Trade Association National Plant specification.

All planting preparation, handling, planting & maintenance should be in accordance with CPSE Code for Handling and Establishing plants.

All trees and shrubs to comply with BS 3936 Part 1 1992, planted to BS 4043:1989 and BS 4428:1989.

All works generally, to comply with the written Soft Landscape Specification.

Topsoil incorporated into planting beds to be gently mounded towards the centre of each bed to allow for settlement.

On completion of planting the whole area of the shrub bed shall be mulched with 75mm consolidated thickness of medium textured decorative grade natural pine bark having first been prepared in accordance with the specification.


Free standing hedges shall have a 3 strand galvanised wire and tanalised softwood timber post fence, to BS 1722-2:2000, erected along a line between the two rows of hedge plants.


All existing trees and hedges to be protected in accordance with BS5837:2012 for the duration of the construction period.

NOTE: DO NOT SCALE FROM DRAWING

Legend

- Existing trees to be retained and protected during construction
- Proposed tree planting within soft landscape, see detail
- Proposed tree planting within hard landscape, see detail
- Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties. Irrigation tubing to root system of *Amelanchier* specimens as required
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed shrub planting to receive 75mm bark mulch after planting operations. Mixes to be planted in groups of 5-7no. of each species
- Proposed ornamental hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. To be maintained at 1.2m height and 1.8m adjacent to plot boundaries
- Proposed ornamental roadside hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. To be maintained at 1m height Planted in parallel rows with the Escallonia row planted closest to paths.
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed grassland areas to be seeded with good quality grass seed mix with 20% locally sourced wildflower mix
- Damp tolerant wildflower and grass mix WFG 9 Wetland and Pond area wildflower and grass mix from BSH.
- Cut lines

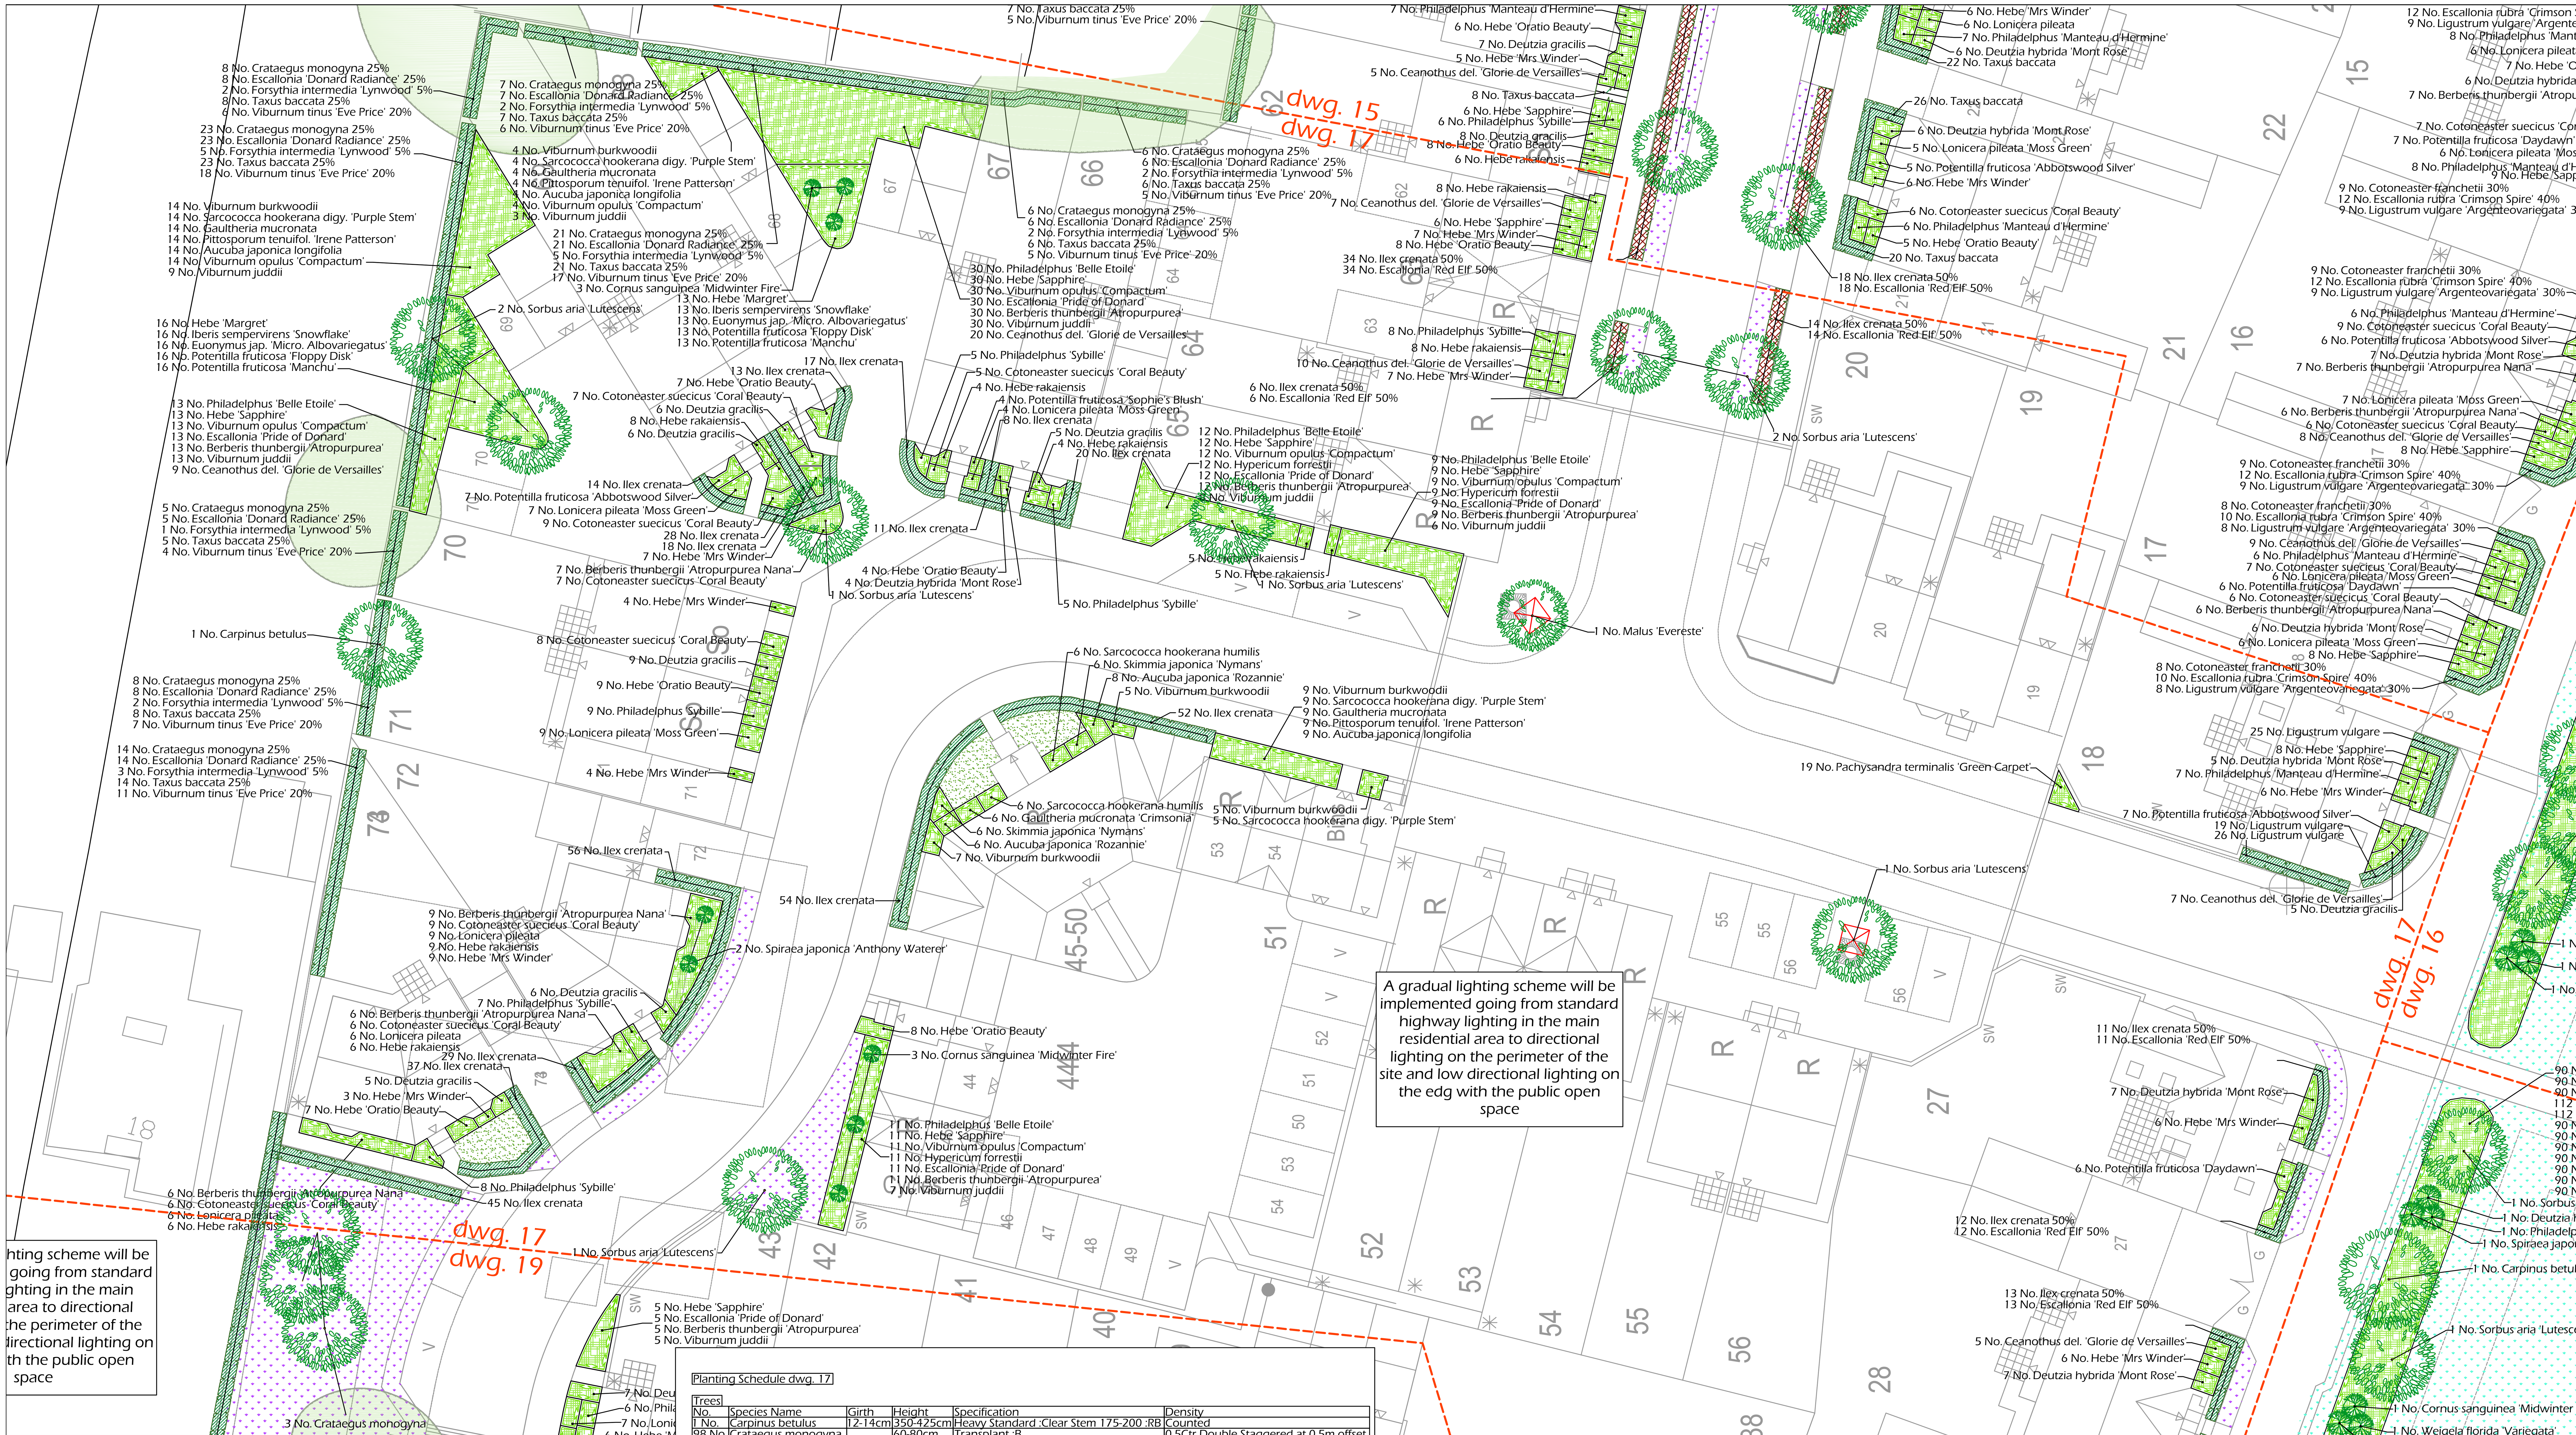

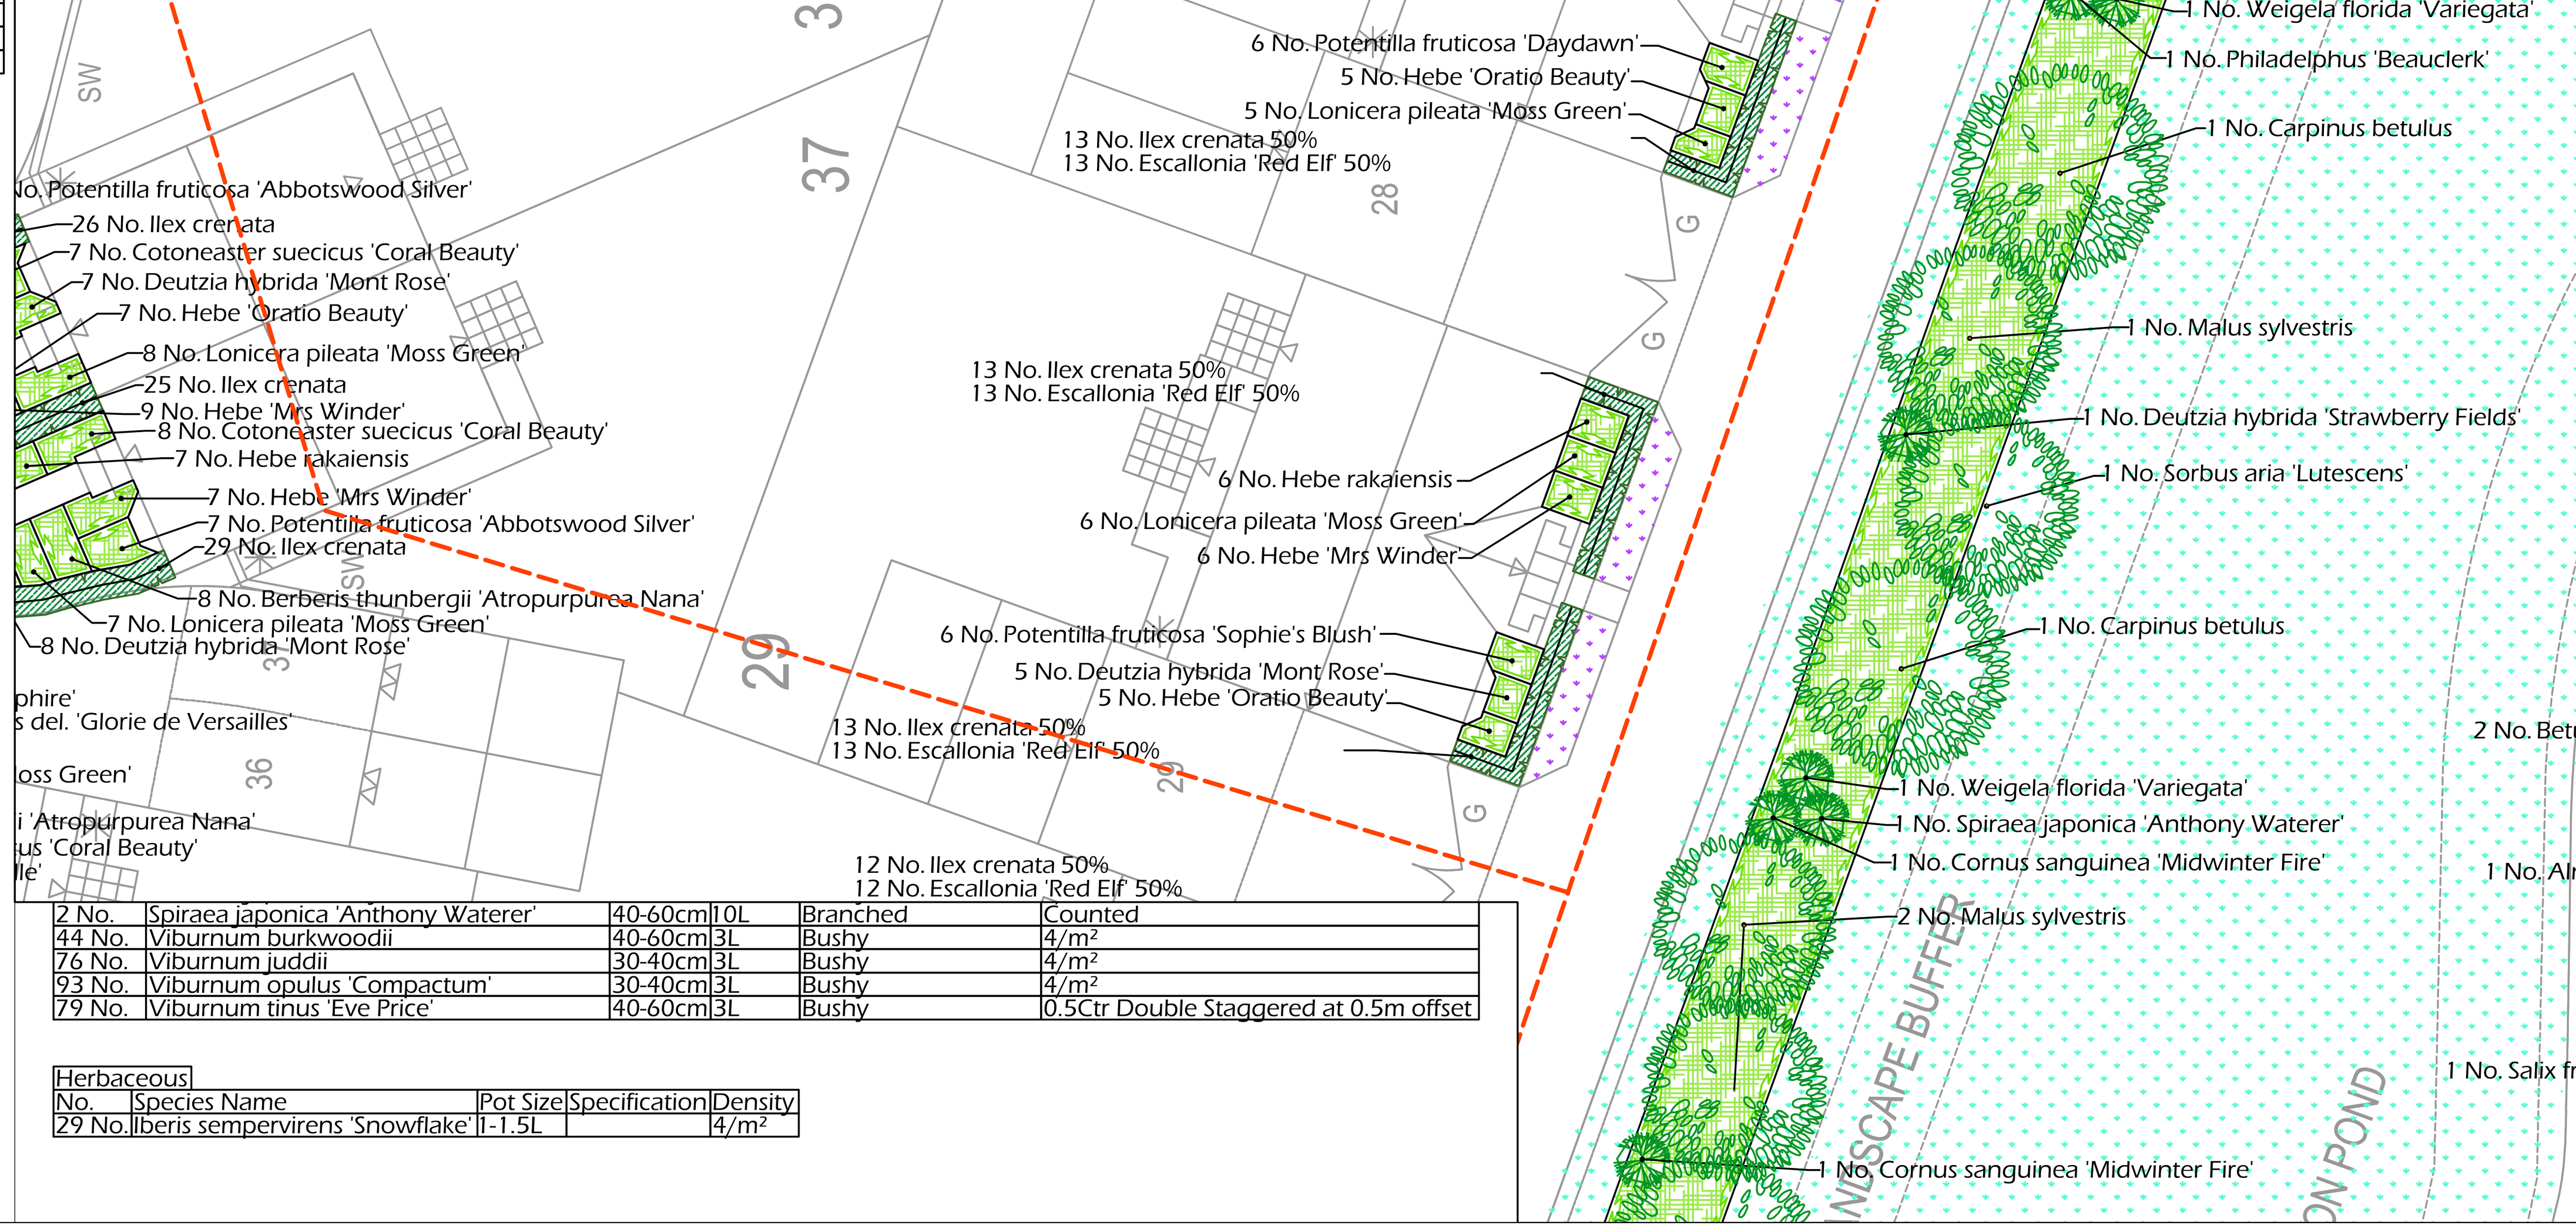

Planting Schedule dwg. 17

Trees

No.	Species Name	Girth	Height	Specification	Density
1 No.	Carpinus betulus	12-14cm	350-425cm	Heavy Standard :Clear Stem 175-200 :RB	Counted
98 No.	Crataegus monogyna		60-80cm	Transplant :B	0.5Ctr Double Staggered at 0.5m offset
1 No.	Malus 'Evereste'	12-14cm	250-300cm	Standard :Clear Stem 175-200 :RB	Counted
8 No.	Sorbus aria 'Lutescens'	12-14cm	350-425cm	Heavy Standard :Clear Stem 175-200 :RB	Counted

Conifers

No.	Species Name	Height	Specification	Density
98 No.	Taxus baccata	60-80cm	RB	0.5Ctr Double Staggered at 0.5m offset


Shrubs

No.	Species Name	Height	Pot Size	Specification	Density
14 No.	Aucuba japonica 'Rozannie'	30-40cm	3L	Bushy	4/m²
27 No.	Aucuba japonica longifolia	30-40cm	3L	Bushy	4/m²
28 No.	Berberis thunbergii 'Atropurpurea Nana'	30-40cm	3L	Bushy	4/m²
75 No.	Berberis thunbergii 'Atropurpurea'	30-40cm	3L	Bushy	4/m²
58 No.	Ceanothus del. 'Glorie de Versailles'	40-60cm	3L	Leader With Laterals	4/m²
6 No.	Cornus sanguinea 'Midwinter Fire'	60-80cm	15L	Branched	Counted
57 No.	Cotoneaster suecicus 'Coral Beauty'	30-40cm	3L	Bushy	4/m²
42 No.	Deutzia gracilis	40-60cm	3L	Branched	4/m²
28 No.	Deutzia hybrida 'Mont Rose'	40-60cm	3L	Branched	4/m²
98 No.	Escallonia 'Donard Radiance'	40-60cm	3L	Bushy	0.5Ctr Double Staggered at 0.5m offset
75 No.	Escallonia 'Pride of Donard'	40-60cm	3L	Bushy	4/m²
129 No.	Escallonia 'Red Elf'	40-60cm	3L	Bushy	0.5Ctr Double Staggered at 0.5m offset
29 No.	Euonymus jap. 'Micro. Albovariegatus'	20-30cm	3L	Bushy	4/m²
24 No.	Forsythia intermedia 'Lynwood'	40-60cm	3L	Branched	0.5Ctr Double Staggered at 0.5m offset
27 No.	Gaultheria mucronata	30-40cm	3L	Bushy	4/m²
6 No.	Gaultheria mucronata 'Crimsonia'	30-40cm	3L	Bushy	4/m²
29 No.	Hebe 'Margret'	20-30cm	3L	Bushy	4/m²
65 No.	Hebe 'Mrs Winder'	30-40cm	3L	Bushy	4/m²
53 No.	Hebe 'Oratio Beauty'	30-40cm	3L	Bushy	4/m²
89 No.	Hebe 'Sapphire'	30-40cm	3L	Bushy	4/m²
69 No.	Hebe rakaiensis	30-40cm	3L	Bushy	4/m²
32 No.	Hypericum forrestii	40-60cm	3L	Bushy	4/m²
402 No.	Ilex crenata	40-60cm	3L	Bushy	0.5Ctr Double Staggered at 0.5m offset
129 No.	Ilex crenata	30-40cm	3L	Bushy	0.5Ctr Double Staggered at 0.5m offset
70 No.	Ligustrum vulgare	60-80cm	3L	Branched	0.5Ctr Double Staggered at 0.5m offset
21 No.	Lonicera pileata	30-40cm	3L	Bushy	4/m²
31 No.	Lonicera pileata 'Moss Green'	30-40cm	3L	Bushy	4/m²
19 No.	Pachysandra terminalis 'Green Carpet'	10-20cm	2L	Bushy :Several shoots	10/m²
75 No.	Philadelphus 'Belle Etoile'	30-40cm	3L	Branched	4/m²
7 No.	Philadelphus 'Manteau d'Hermine'	30-40cm	3L	Branched	4/m²
42 No.	Philadelphus 'Sybille'	30-40cm	3L	Branched	4/m²
27 No.	Pittosporum tenuifol. 'Irene Patterson'	30-40cm	3L	Bushy	4/m²
14 No.	Potentilla fruticosa 'Abbotswood Silver'	30-40cm	3L	Bushy	4/m²
12 No.	Potentilla fruticosa 'Daydawn'	30-40cm	3L	Bushy	4/m²
29 No.	Potentilla fruticosa 'Floppy Disk'	20-30cm	3L	Bushy	4/m²
29 No.	Potentilla fruticosa 'Manchu'	20-30cm	3L	Bushy	4/m²
10 No.	Potentilla fruticosa 'Sophie's Blush'	30-40cm	3L	Bushy	4/m²
32 No.	Sarcococca hookerana digy. 'Purple Stem'	30-40cm	3L	Bushy	4/m²
12 No.	Sarcococca hookerana humilis	30-40cm	3L	Bushy	4/m²
12 No.	Skimmia japonica 'Nymans'	30-40cm	3L	Bushy	4/m²
2 No.	Spiraea japonica 'Anthony Waterer'	40-60cm	10L	Branched	Counted
44 No.	Viburnum burkwoodii	40-60cm	3L	Bushy	4/m²
76 No.	Viburnum juddii	30-40cm	3L	Bushy	4/m²
93 No.	Viburnum opulus 'Compactum'	30-40cm	3L	Bushy	4/m²
79 No.	Viburnum tinus 'Eve Price'	40-60cm	3L	Bushy	0.5Ctr Double Staggered at 0.5m offset

Herbaceous

No.	Species Name	Pot Size	Specification	Density
29 No.	Iberis sempervirens 'Snowflake'	1-1.5L		4/m²

Tree Planting Pit Detail within Hard Landscape

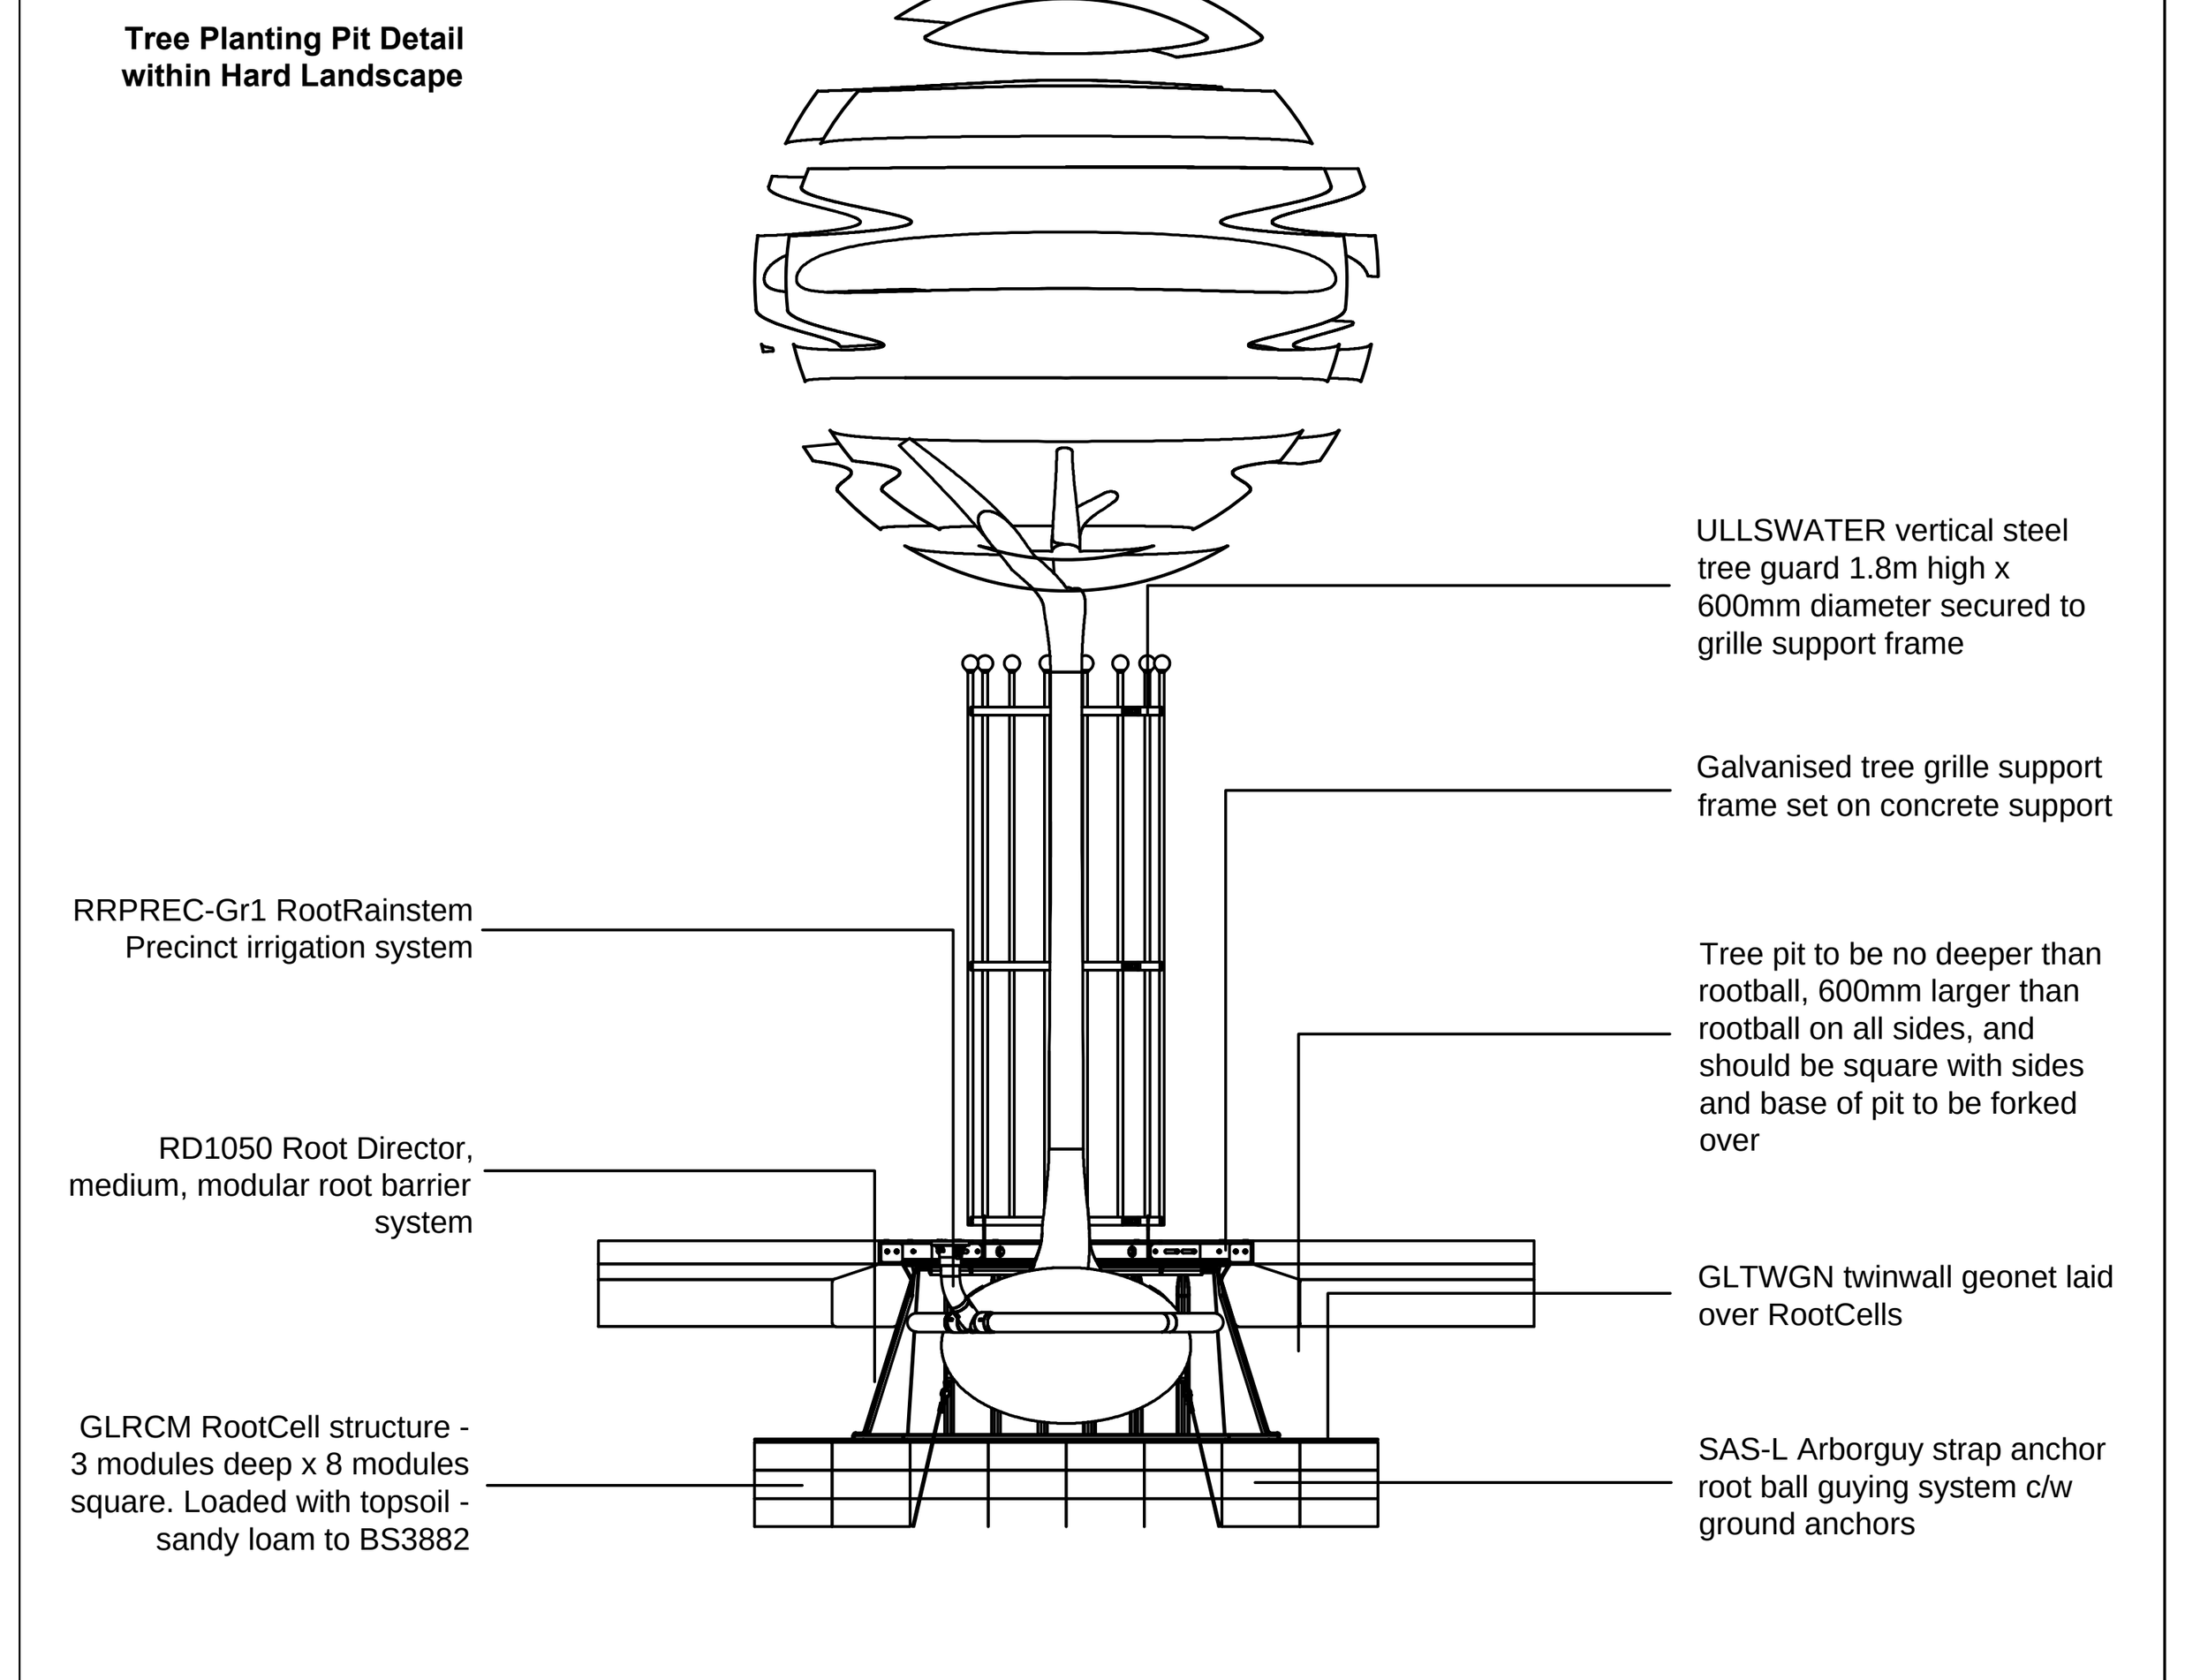

All components as supplied from Green Leaf or similar and approved

Rev	Date	Details	Drawn
C	16/04/2013	Additional attenuation ponds	AK
B	27/02/2013	Client Comments	JCL
A	19/02/2013	Layout Change	JCL

ACD

Ecology

Arboriculture

Landscape Architecture

ACD Landscape Architects & ACD Ecology
Rodbourne Rail Business Centre, Grange Lane, Malmesbury, Wilts, SN16 0ES
Tel: 01666 825646 Fax: 01666 824654

ACD Arboriculture
Tanners, Lower Street,Haslemere, Surrey, GU27 2PE
Tel: 01483 425714 Fax: 01428 641090

ACD (Landscape Architects) Southampton
12 Southgate Street, Winchester, Hampshire, SO23 9EF
Tel: 01962 855604

www.acdlandscape.co.uk

Space to live
David Wilson Homes

scheme: Manor Farm, Denvilles Havant
client: David Wilson Homes
drawing: Landscape Proposals
date: November 2012
scale: 1:200@A1
drawing no: BSH 17581 17C
drawn: AK checked: AW

Copyright of ACD Landscape Architects Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted: 2012. Copyright of this plan remains with ACD until all fees have been paid in full.