


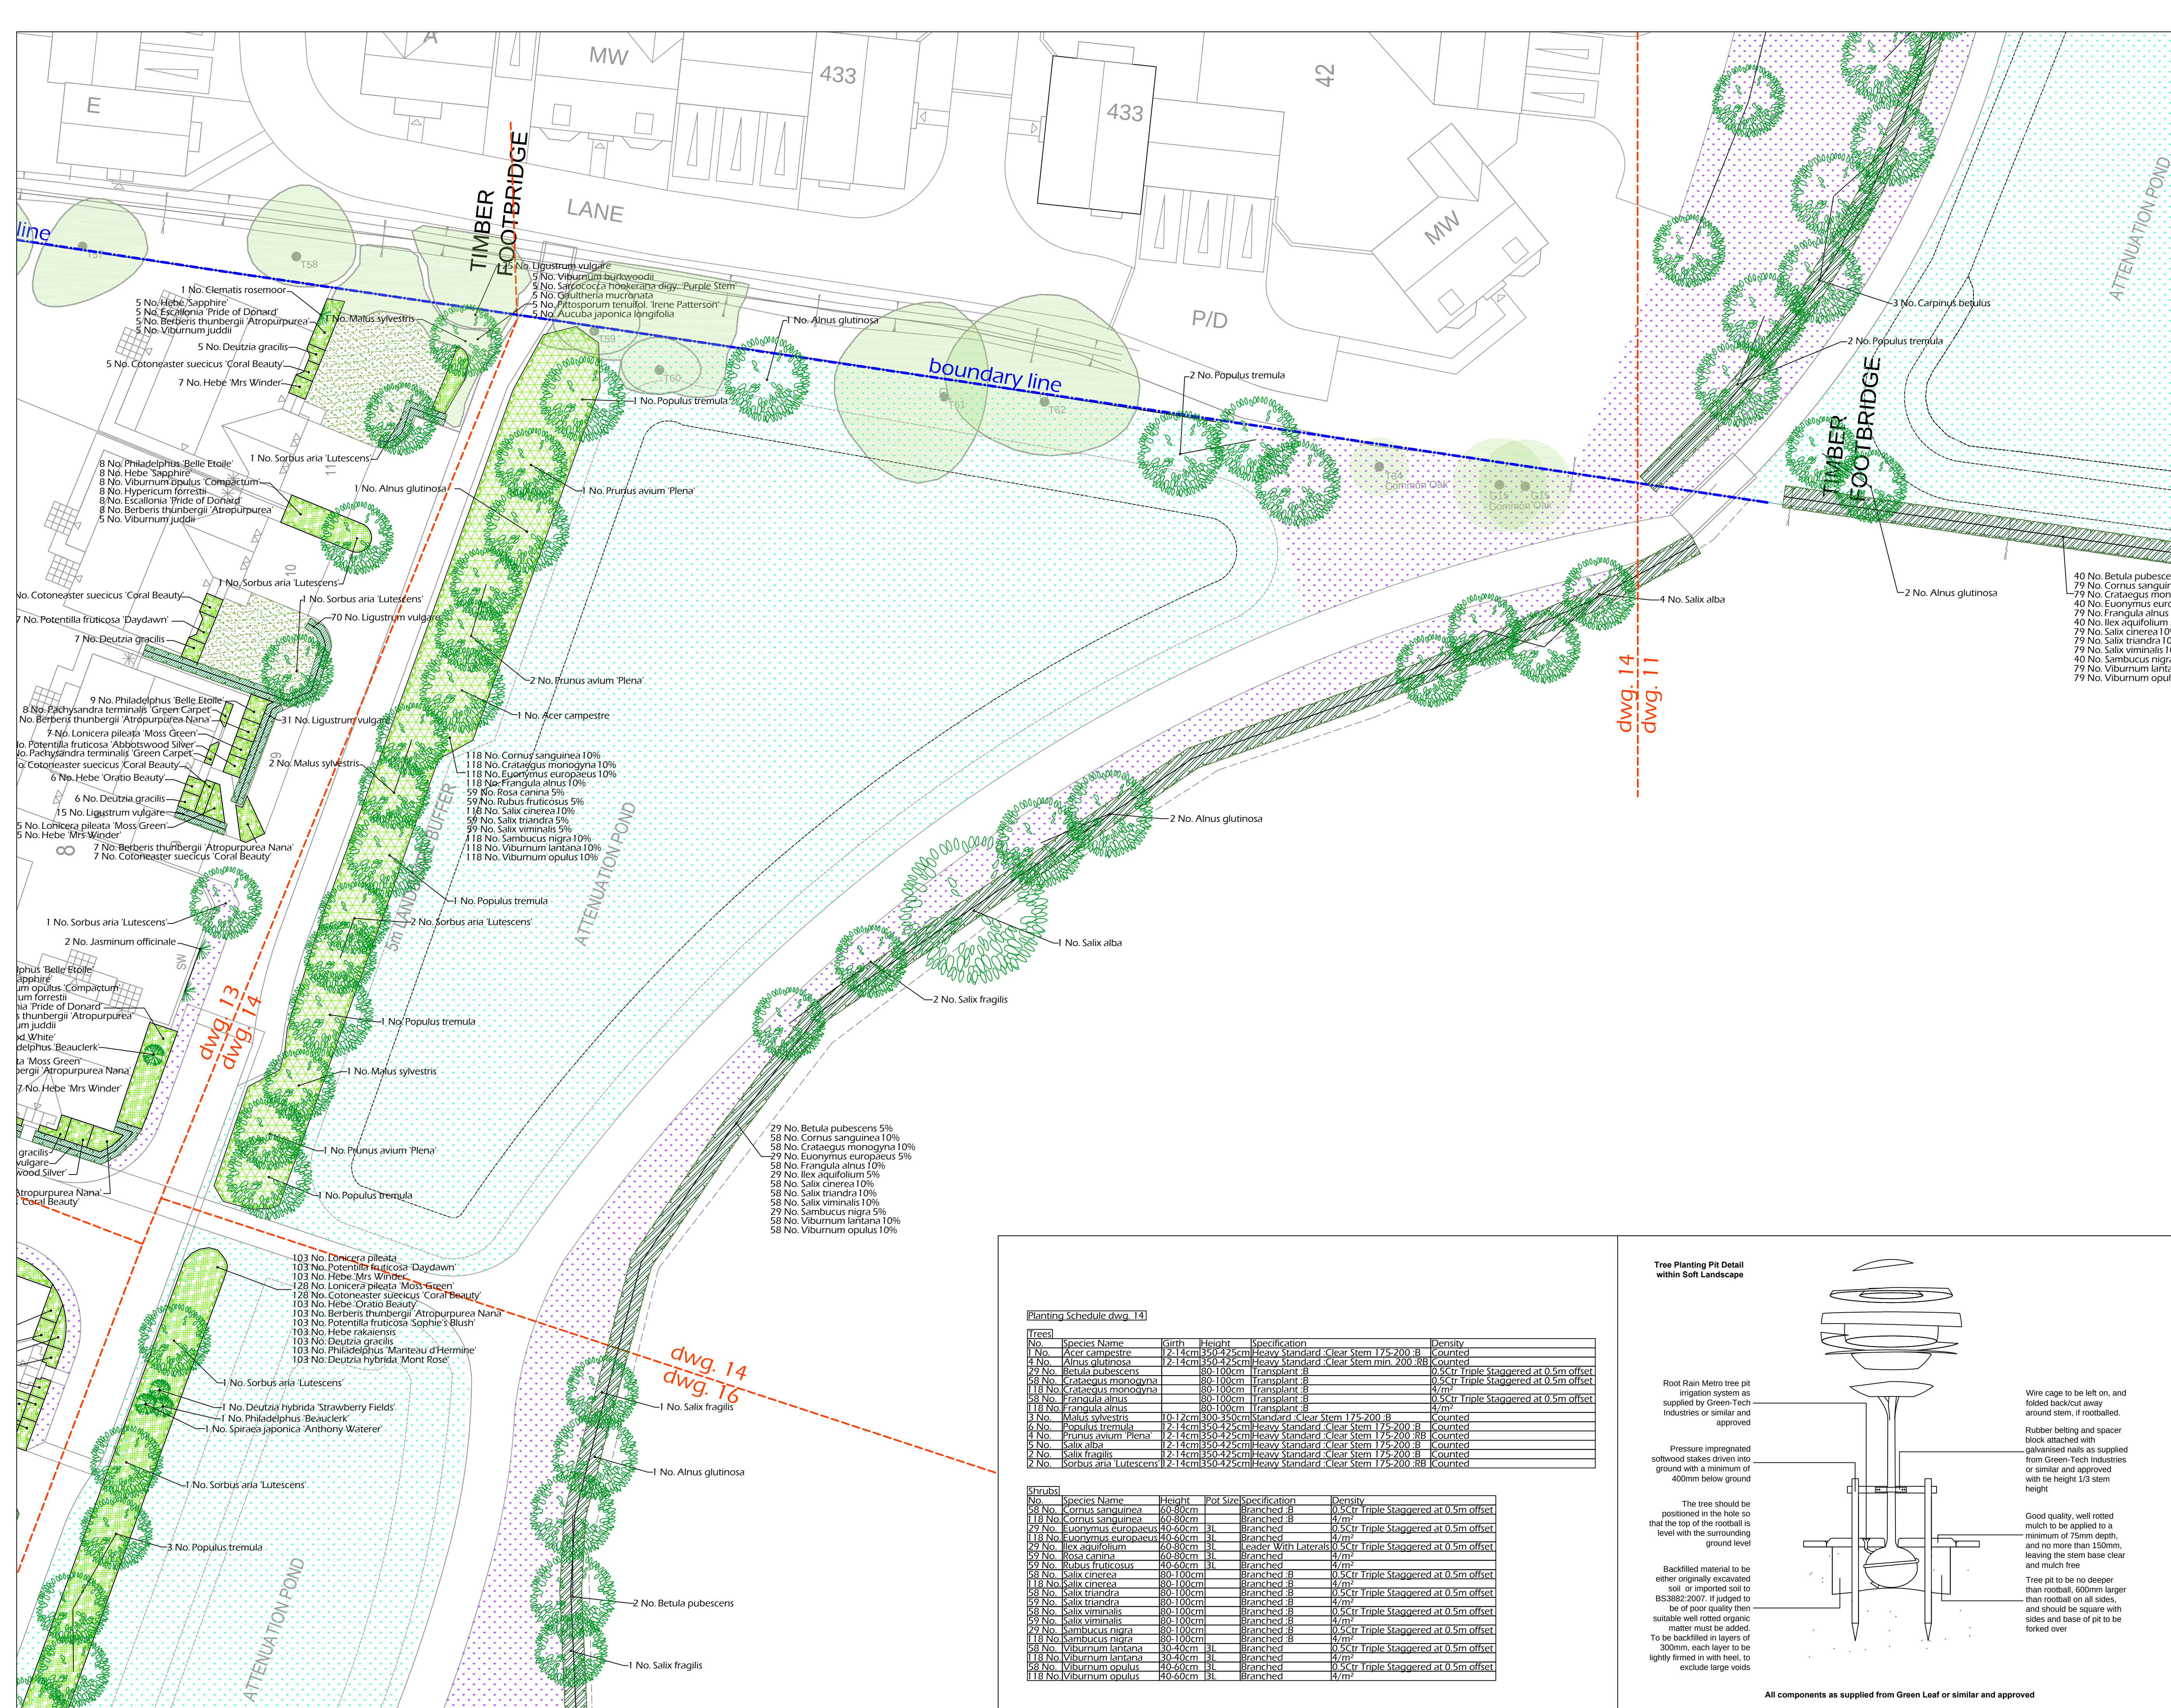

SPECIFICATION
Forestry Commission Practice note 8.
All native species should be of local stock. Native trees and shrubs certified as British Native plant stock.
All planting stock should comply with the Horticultural Trade Association National Plant Specification.
All planting preparation, handling, planting & maintenance should be in accordance with CPSE Code for Handling and Establishing plants.
All trees and shrubs to comply with BS 3936 Part 1 1992, planted to BS 4043:1989 and BS 4428:1989. All works generally, to comply with the written Soft Landscape Specification.
Topsoil incorporated into planting beds to be gently mounded towards the centre of each bed to allow for settlement.
On completion of planting the whole area of the shrub bed shall be mulched with 75mm consolidated thickness of medium textured decorative grade natural pine bark having first been prepared in accordance with the specification.
Free standing hedges shall have a 3 strand galvanised wire and tanalised softwood timber post fence, to BS 1722-2:2000, erected along a line between the two rows of hedge plants.
All existing trees and hedges to be protected in accordance with BS5837:2012 for the duration of the construction period.

NOTE: DO NOT SCALE FROM DRAWING

Legend

- Existing trees to be retained and protected during construction
- Proposed tree planting within soft landscape, see details
- Proposed specimen shrub planting to receive short angular staking on tall standards with expandable tree ties. Irrigation tubing to root system of Amelanchier specimens as required
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed shrub planting to receive 75mm bark mulch after planting operations. Mixes to be planted in groups of 5-7nos. of each species
- Proposed native shrub mix to receive 75mm bark mulch after planting operations. Shrubs to be planted in groups of 7-10nos. of each species
- Proposed ornamental hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. To be maintained at 1.2m height and 1.5m adjacent to plot boundaries
- Proposed mixed native hedge planting to be planted in a triple staggered row 500mm apart and at 500mm centres in each row. To be maintained at 1.8m height
- Proposed grass areas to receive good quality amenity grass swards laid in line with good horticultural practices
- Proposed grassland areas to be seeded with good quality grass seed mix with 20% locally sourced wildflower mix
- Damp tolerant wildflower and grass mix: WFG 9
- Wetland and Pond area wildflower and grass mix from BSH.
- Cut lines

North Arrow

B	16/04/2013	Additional attenuation ponds	AK
A	19/02/2013	Layout Change	JCL
Rev	Date	Details	Drawn

ACD
Ecology
Arboriculture
Landscape Architecture

ACD Landscape Architects & ACD Ecology
Rodbourne Rail Business Centre, Grange Lane, Malnesbury,
Wiltshire, SN16 0ES
Tel: 01666 825646 Fax: 01666 824654

ACD Arboriculture
Tanners, Lower Street, Haslemere, Surrey,
GU27 2PE
Tel: 01483 425714 Fax: 01428 641090

ACD (Landscape Architects) Southampton
29 Southgate Street, Winchester, Hampshire, SO23 9EF
Tel: 01962 855604
www.acdlandscape.co.uk

Space to live
David Wilson Homes

scheme: Manor Farm, Denvilles
client: David Wilson Homes
drawing: Landscape Proposals
date: November 2012
scale: 1:200@A1
drawing no: BSH 17581 14B
drawn: AK checked: AW

Copyright of ACD Landscape Architects Ltd. All rights reserved in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2012. Copyright of this plan remains with ACD until all fees have been paid in full.

Planting Schedule (dwg. 14)

Trees					
No.	Species Name	Girth	Height	Specification	Density
1	No. Acer campestre	12-14cm	350-425cm	Heavy Standard Clear Stem 175-200	B Counted
4	No. Alnus glutinosa	12-14cm	350-425cm	Heavy Standard Clear Stem min. 200	RB Counted
29	No. Betula pubescens	80-100cm	Transplant	B	0.5ctr Triple Staggered at 0.5m offset
58	No. Crataegus monogyna	80-100cm	Transplant	B	0.5ctr Triple Staggered at 0.5m offset
118	No. Crataegus monogyna	80-100cm	Transplant	B	4/m²
58	No. Frangula alnus	80-100cm	Transplant	B	0.5ctr Triple Staggered at 0.5m offset
118	No. Frangula alnus	80-100cm	Transplant	B	4/m²
3	No. Malus sylvestris	10-12cm	300-350cm	Standard Clear Stem 175-200	B Counted
6	No. Populus tremula	12-14cm	350-425cm	Heavy Standard Clear Stem 175-200	RB Counted
4	No. Prunus avium 'Plena'	12-14cm	350-425cm	Heavy Standard Clear Stem 175-200	RB Counted
5	No. Salix alba	12-14cm	350-425cm	Heavy Standard Clear Stem 175-200	B Counted
2	No. Sorbus fragilis	12-14cm	350-425cm	Heavy Standard Clear Stem 175-200	B Counted
2	No. Sorbus aria 'Lutescens'	12-14cm	350-425cm	Heavy Standard Clear Stem 175-200	RB Counted

Shrubs						
No.	Species Name	Height	Pot Size	Specification	Density	
58	No. Cornus sanguinea	60-80cm	3L	Branched	B	0.5ctr Triple Staggered at 0.5m offset
118	No. Cornus sanguinea	60-80cm	3L	Branched	B	4/m²
29	No. Euonymus europaeus	40-60cm	3L	Branched	B	0.5ctr Triple Staggered at 0.5m offset
118	No. Euonymus europaeus	40-60cm	3L	Branched	B	4/m²
29	No. Ilex aquifolium	60-80cm	3L	Leader With Laterals	B	0.5ctr Triple Staggered at 0.5m offset
58	No. Rosa canina	60-80cm	3L	Branched	B	4/m²
59	No. Rubus fruticosus	40-60cm	3L	Branched	B	4/m²
58	No. Salix cinerea	80-100cm	3L	Branched	B	0.5ctr Triple Staggered at 0.5m offset
118	No. Salix cinerea	80-100cm	3L	Branched	B	4/m²
58	No. Salix triandra	80-100cm	3L	Branched	B	0.5ctr Triple Staggered at 0.5m offset
59	No. Salix triandra	80-100cm	3L	Branched	B	4/m²
59	No. Salix viminalis	80-100cm	3L	Branched	B	0.5ctr Triple Staggered at 0.5m offset
59	No. Salix viminalis	80-100cm	3L	Branched	B	4/m²
29	No. Sambucus nigra	80-100cm	3L	Branched	B	0.5ctr Triple Staggered at 0.5m offset
118	No. Sambucus nigra	80-100cm	3L	Branched	B	4/m²
58	No. Viburnum lantana	30-40cm	3L	Branched	B	0.5ctr Triple Staggered at 0.5m offset
118	No. Viburnum lantana	30-40cm	3L	Branched	B	4/m²
58	No. Viburnum opulus	40-60cm	3L	Branched	B	0.5ctr Triple Staggered at 0.5m offset
118	No. Viburnum opulus	40-60cm	3L	Branched	B	4/m²

