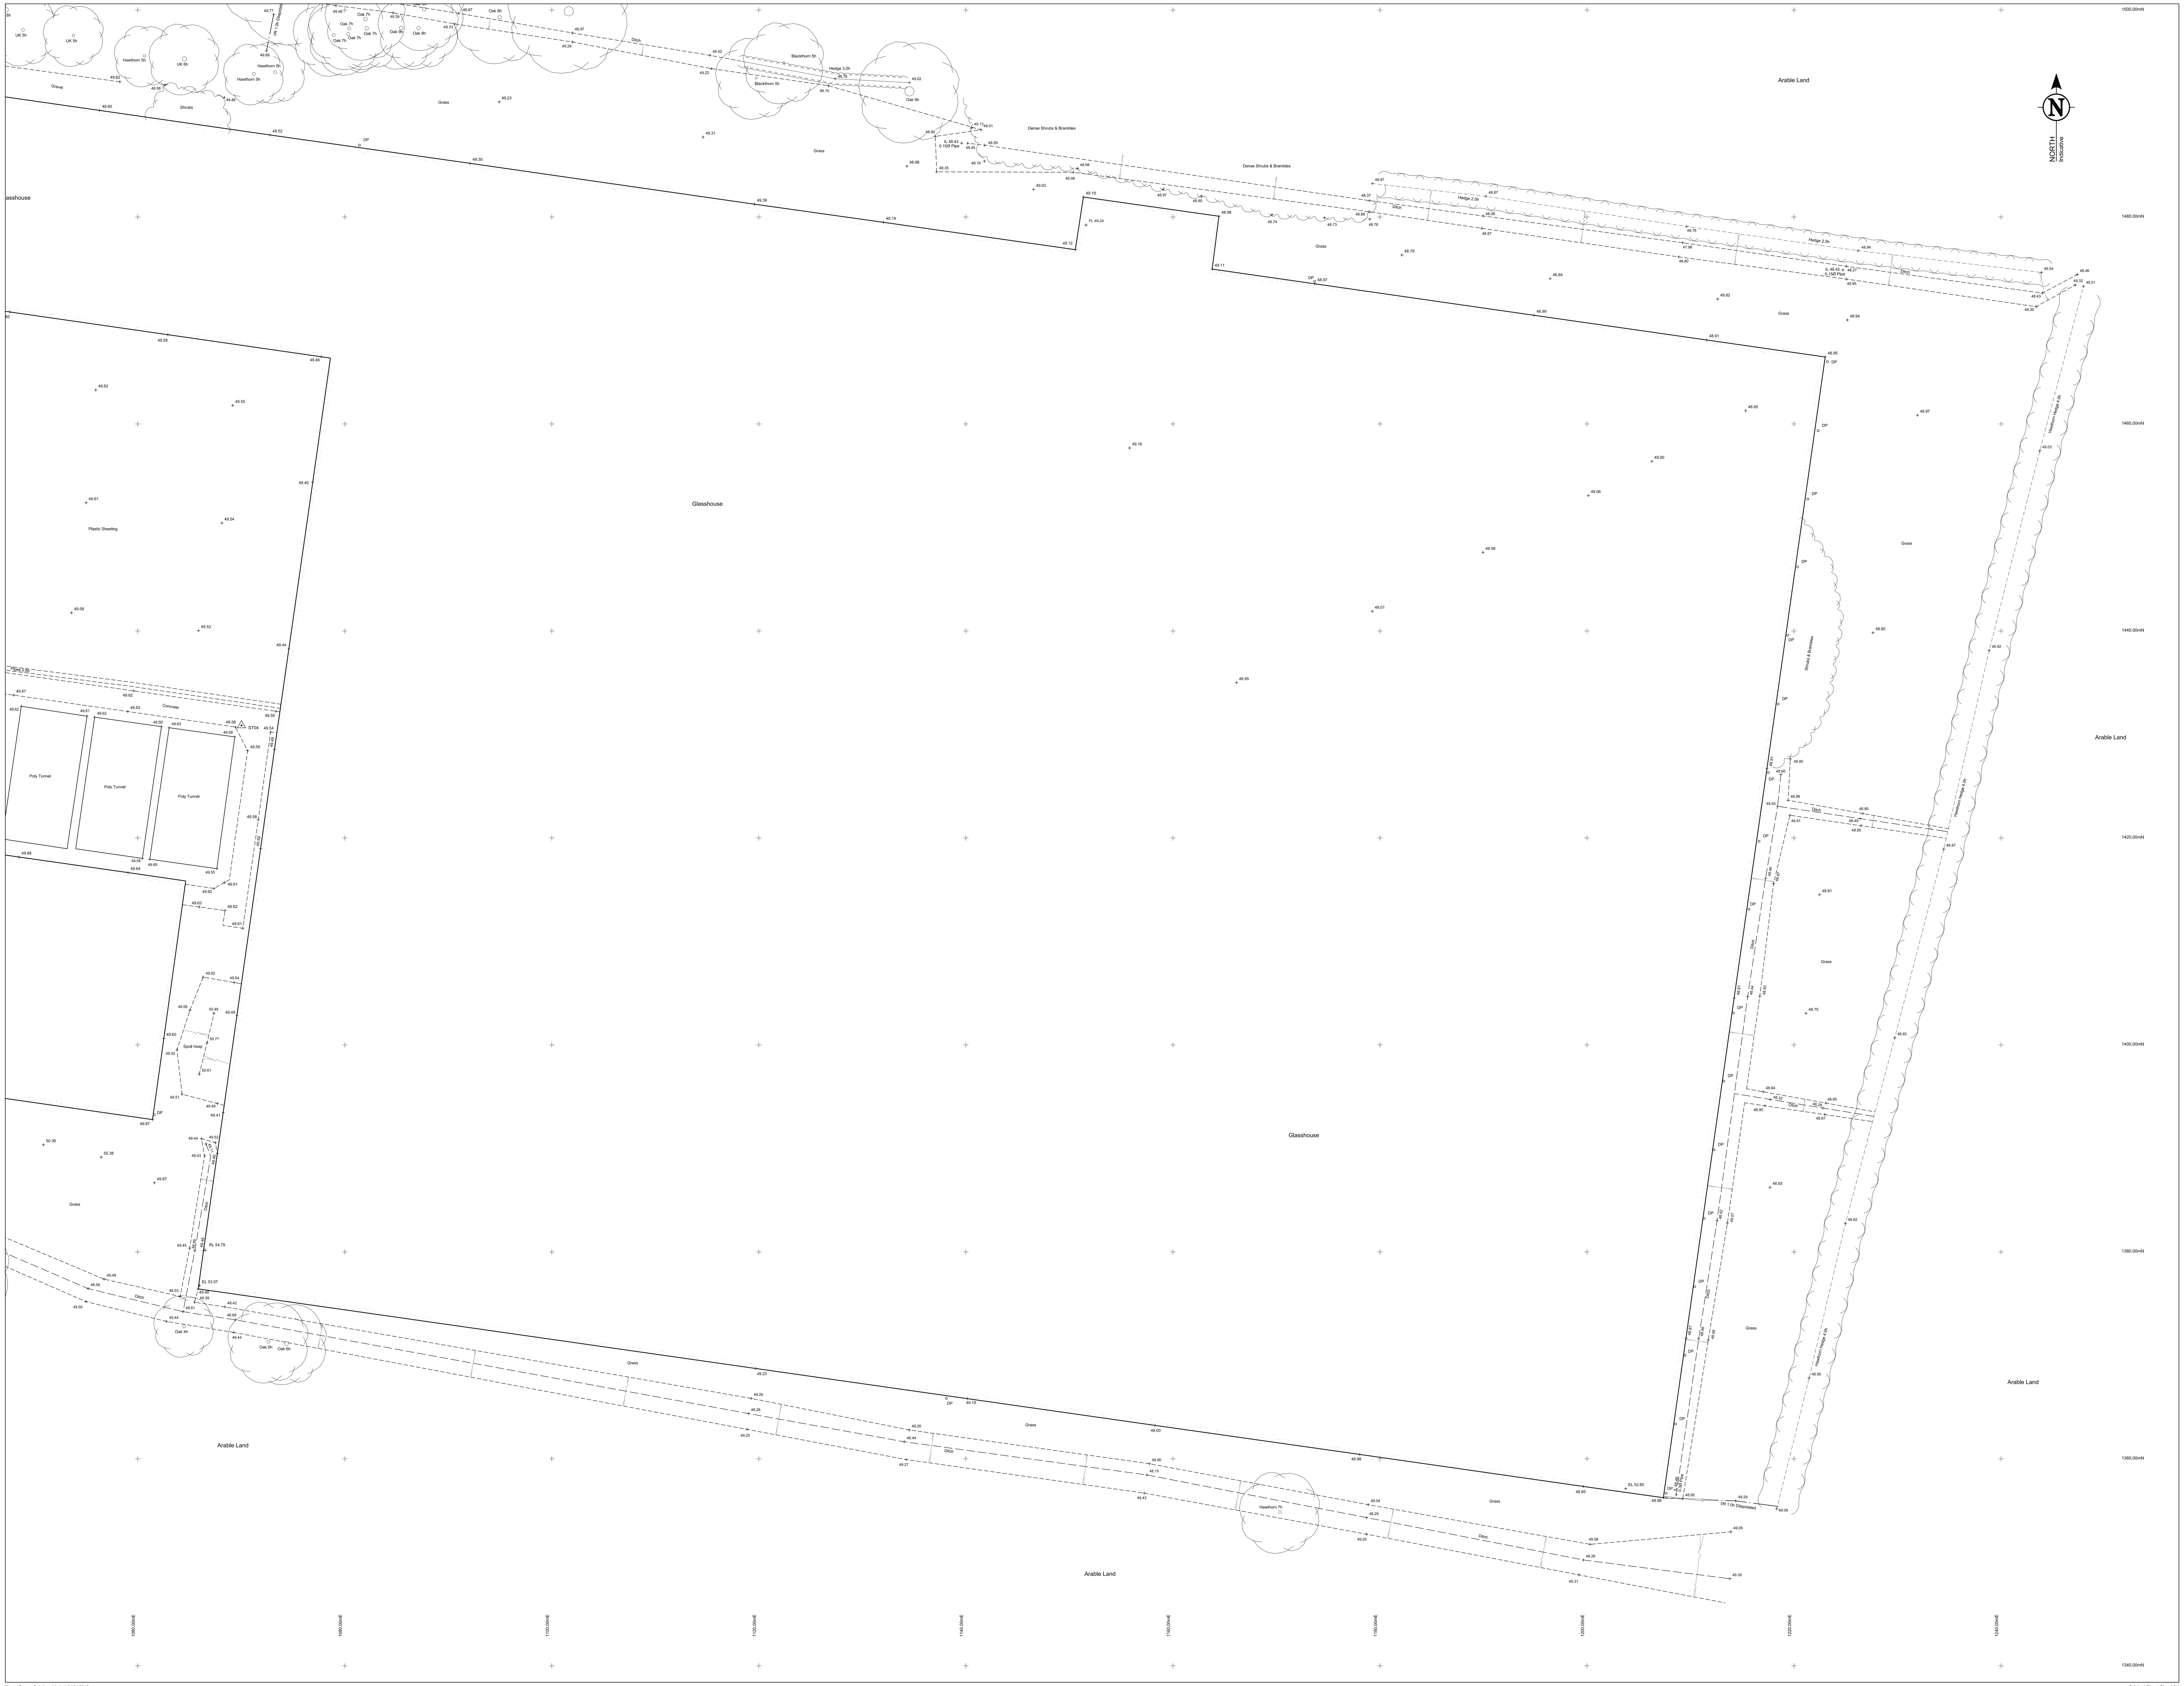


TOPOGRAPHICAL & MEASURED BUILDING SURVEYS

ABBREVIATIONS & SYMBOLS

AH	Arch Head Height	FH	Fire Hydrant	RSJ	Rolled Steel Joist
AR	Assumed Route	FBD	Floor Board Direction	SI	Sign Post
AV	Air Valve	FH	Fire Hydrant	SP	Arch Spring Point Height
BB	Belisha Beacon	FL	Floor Level	SV	Stop Valve
BH	Bore Hole	FP	Flag Pole	SW	Surface Water
BL	Bed Level	FW	Foul Water	SY	Stay
BO	Bollard	GG	Gully Grate	Tac	Tactile Paving
BrP	Brace Post	GV	Gas Valve	TC	Telecom Cover
BS	Bus Stop	HH	Head Height	TH	Trial Pit
BU	Bush	IC	Inspection Cover	THL	Threshold Level
B/W	Barbed Wire Fence	IL	Invert Level	TL	Traffic Light
BX	Box (Utilities)	IR	Iron Railings	ToW	Top of Wall
C/B	Close Board Fence	KO	Kerb Outlet	TP	Telegraph Pole
CH	Cill Height	LP	Lamp Post	TV	Cable TV Cover
CL	Cover Level	MH	Manhole	UB	Universal Beam
C/L	Chain Link Fence	MP	Marker Post	UC	Unknown Cover
C-Lev	Ceiling Level	NB	Name Board	UK	Unknown Tree
Col	Column	OHL	Overhead Line (approx)	USB	Under Side Beam
C/P	Chestnut Paling Fence	Pan	Panel Fence	UTL	Unable To Lift
CR	Cable Riser	PB	Post Box	VP	Vent Pipe
DC	Drainage Channel	PM	Parking Meter	WB	Waste Bin
DH	Door Head Height	PO	Post	WH	Weep Hole
DP	Down Pipe	P/R	Post & Rail Fence	WL	Water Level
DR	Drain	P/W	Post & Wire Fence	WM	Water Meter
EL	Eaves Level	P/Wall	Partition Wall	WO	Wash Out
EP	Electric Pole	RE	Rodding Eye	(xxx)	Floor to Ceiling Height
ER	Earth Rod	RL	Ridge Level	(xxx) F/C	Floor to False Ceiling Ht
ET	EP+Transformer	RP	Reflector Post		
FB	Flower Bed	RS	Road Sign	△	Survey Control Station
FBD	Floor Board Direction	RSD	Roller Shutter Door		

DRAWING NOTE

Topographical Surveys

Trees are drawn to scale showing the average canopy spread. Descriptions and heights should be used as a guide only.

All building names, descriptions, number of storeys, construction type including roof line details are indicative only and taken externally from ground level.

All below ground details including drainage, voids and services have been identified from above ground and therefore all details relating to these features including; sizes, depth, description etc will be approximate only. All critical dimensions and connections should be checked and verified prior to starting work.

Detail, services and features may not have been surveyed if obstructed or not reasonably visible at the time of the survey.

Measured Building Surveys

Measurements to internal walls are taken to the wall finishes at approx 1m above the floor level and the wall assumed to be vertical.

Cill heights are measured as floor to the cill and head heights are measured from cill to the top of window.

General

The contractor must check and verify all site and building dimensions, levels, utilities and drainage details and connections prior to commencing work. Any errors or discrepancies must be notified to Survey Solutions immediately.

The accuracy of the digital data is the same as the plotting scale implies. All dimensions are in metres unless otherwise stated.

The survey control listed is only to be used for topographical surveys at the stated scale. All control must be checked and verified prior to use.

© Land Survey Solutions Limited holds the copyright to all the information contained within this document and their written consent must be obtained before copying or using the data other than for the purpose it was originally supplied.

Do not scale from this drawing.

SURVEY GRID AND LEVEL DATUM

The survey grid is based on arbitrary coordinates for survey control point ST01 of 1000.000mE, 1500.000mN and a magnetic bearing of 164° between ST01 and ST02 with a scale factor of 1.000.
All levels relate to an arbitrary level datum value of 50.00m which has been assigned to survey control point ST01.

SHEET LAYOUT PLAN

10600swg-03A

CONTROL CO-ORDINATES

STATIONS	EASTINGS	NORTHINGS	LEVEL	DESCRIPTION
ST01	1000.000	1500.000	50.000	PK Nail
ST02	1011.427	1460.150	49.929	Hilti Nail
ST03	997.047	1427.684	49.952	PK Nail
ST04	1070.020	1430.873	49.576	PK Nail
S110	978.562	1536.554	50.125	PK Nail
S111	924.697	1548.917	50.509	Hilti Nail
S101	998.118	1504.499	50.010	PK Nail
S102	994.256	1534.197	49.972	PK Nail

REV	DESCRIPTION	DRAWN	APPR	DATE
A	'WINDRUSH' AREA ADDED	RAH		22/12/12

SURVEY SOLUTIONS
Ipswich Coventry Yeovil Norwich Perth Nottingham Brentwood
Tel No: 0845 0405 969 Fax No: 0845 0405 970
www.survey-solutions.co.uk enquiries@survey-solutions.co.uk
LAND SURVEYING BUILDING SURVEYING UNDERGROUND SURVEYING

PROJECT TITLE
COPSEYS NURSERY
BLENHIEM GARDENS, HAVANT, HAMPSHIRE

DRAWING DETAIL
TOPOGRAPHICAL SURVEY
Sheet 3 of 3

CLIENT				SCALE
GENERATOR DEVELOPMENTS LLP				1:200
SURVEYOR	SURVEY DATE	CHECKED BY	APPROVED BY	DWG STATUS
RAH	30/11/11			FINAL
DRAWING NUMBER			REVISION	ISSUE DATE
10600swg-03			A	2/12/11

©Land Survey Solutions Limited 01/01/2010

Original Sheet Size A0H