


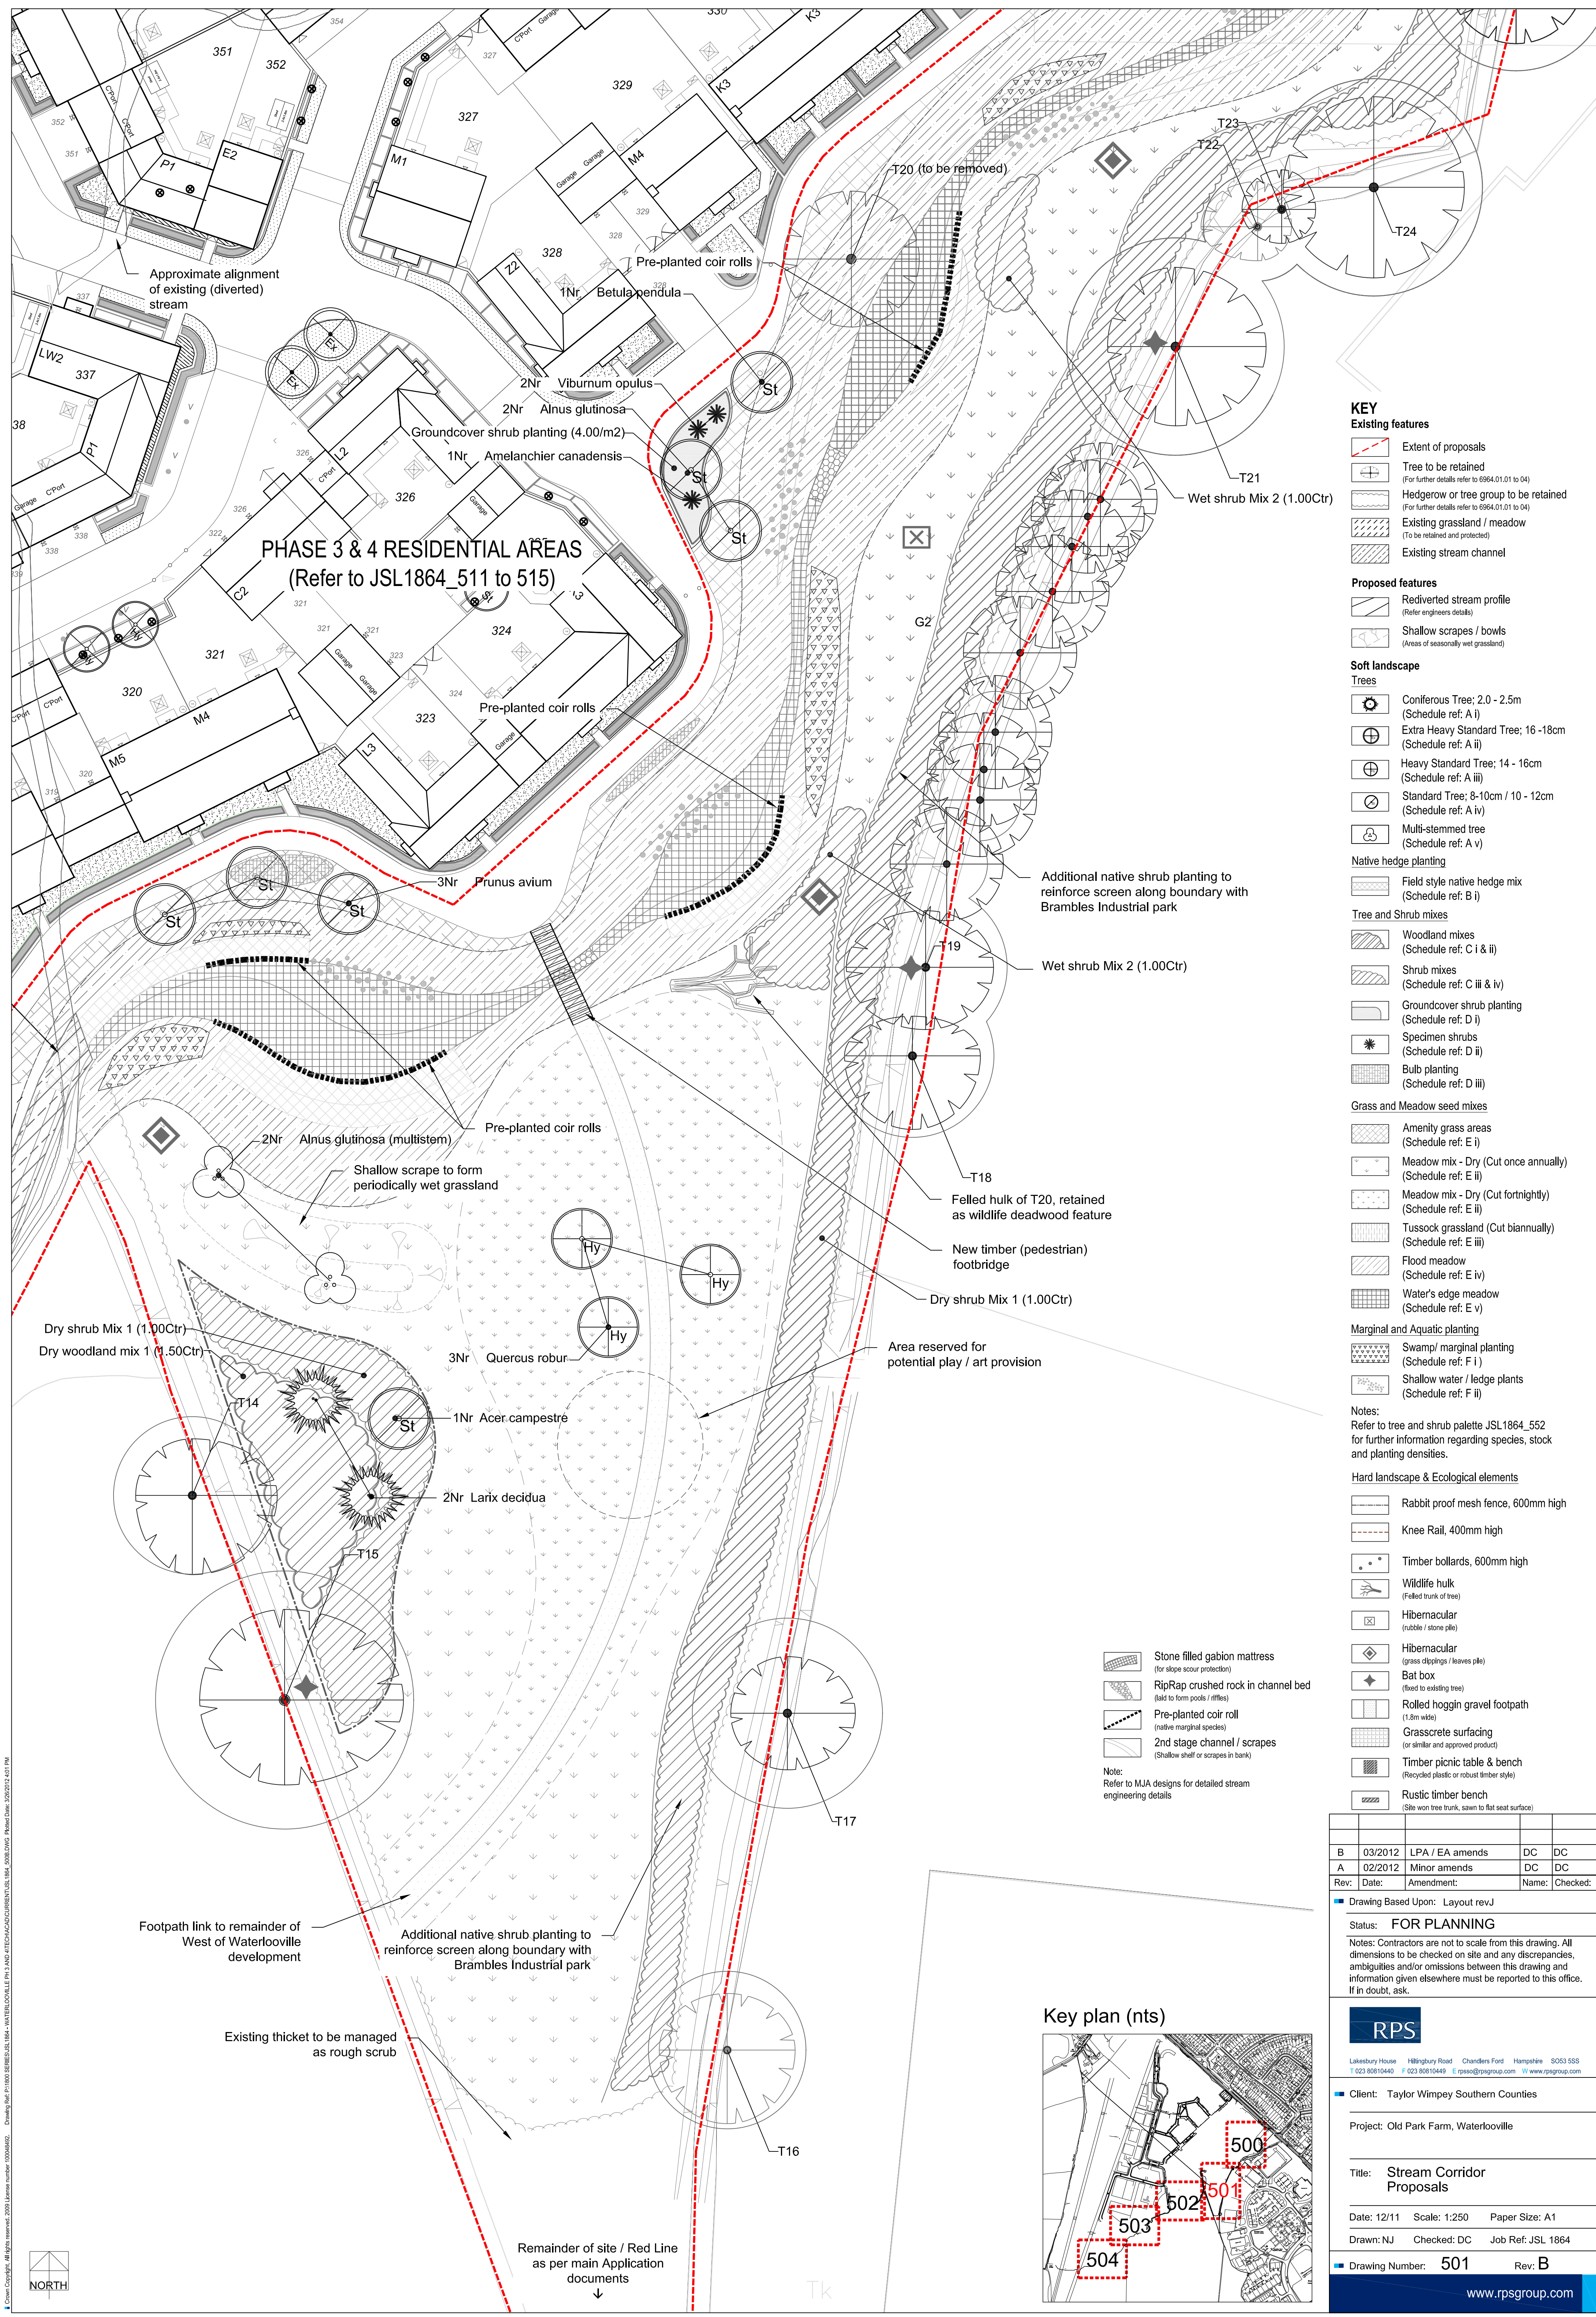

Existing features

- Extent of proposals
- Tree to be retained (For further details refer to 6964.01.01 to 04)
- Hedgerow or tree group to be retained (For further details refer to 6964.01.01 to 04)
- Existing grassland / meadow (To be retained and protected)
- Existing stream channel

Proposed features

- Rediverted stream profile (Refer engineers details)
- Shallow scrapes / bowls (Areas of seasonally wet grassland)

Soft landscape

Trees

- Coniferous Tree; 2.0 - 2.5m (Schedule ref: A i)
- Extra Heavy Standard Tree; 16 - 18cm (Schedule ref: A ii)
- Heavy Standard Tree; 14 - 16cm (Schedule ref: A iii)
- Standard Tree; 8-10cm / 10 - 12cm (Schedule ref: A iv)
- Multi-stemmed tree (Schedule ref: A v)

Native hedge planting

- Field style native hedge mix (Schedule ref: B i)

Tree and Shrub mixes

- Woodland mixes (Schedule ref: C i & ii)
- Shrub mixes (Schedule ref: C iii & iv)
- Groundcover shrub planting (Schedule ref: D i)
- Specimen shrubs (Schedule ref: D ii)
- Bulb planting (Schedule ref: D iii)

Grass and Meadow seed mixes

- Amenity grass areas (Schedule ref: E i)
- Meadow mix - Dry (Cut once annually) (Schedule ref: E ii)
- Meadow mix - Dry (Cut fortnightly) (Schedule ref: E ii)
- Tussock grassland (Cut biannually) (Schedule ref: E iii)
- Flood meadow (Schedule ref: E iv)
- Water's edge meadow (Schedule ref: E v)

Marginal and Aquatic planting

- Swamp/ marginal planting (Schedule ref: F i)
- Shallow water / ledge plants (Schedule ref: F ii)

Notes:


Refer to tree and shrub palette JSL1864\_552 for further information regarding species, stock and planting densities.

Hard landscape & Ecological elements

- Rabbit proof mesh fence, 600mm high
- Knee Rail, 400mm high
- Timber bollards, 600mm high
- Wildlife hulk (Felled trunk of tree)
- Hibernacular (rubble / stone pile)
- Hibernacular (grass clippings / leaves pile)
- Bat box (fixed to existing tree)
- Rolled hoggin gravel footpath (1.8m wide)
- Grasscrete surfacing (or similar and approved product)
- Timber picnic table & bench (Recycled plastic or robust timber style)
- Rustic timber bench (Site won tree trunk, sawn to flat seat surface)

- Stone filled gabion mattress (for slope scour protection)
  - RipRap crushed rock in channel bed (laid to form pools / riffles)
  - Pre-planted coir roll (native marginal species)
  - 2nd stage channel / scrapes (Shallow shelf or scrapes in bank)
- Note:  
Refer to MJA designs for detailed stream engineering details

Key plan (nts)

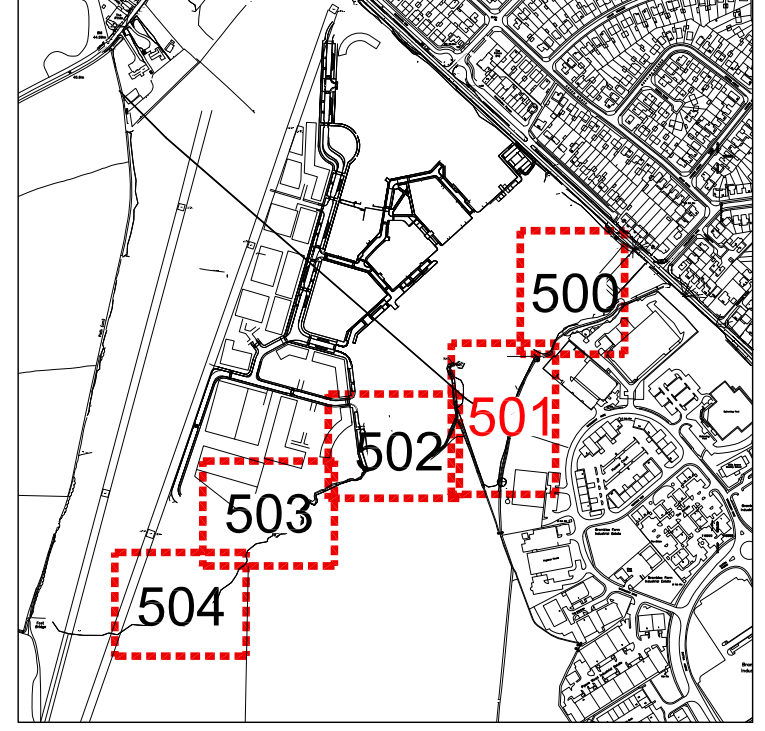

■ Drawing Based Upon: Layout revJ

Status: **FOR PLANNING**

Notes: Contractors are not to scale from this drawing. All dimensions to be checked on site and any discrepancies, ambiguities and/or omissions between this drawing and information given elsewhere must be reported to this office. If in doubt, ask.



Lakesbury House  
T 023 80810440

Hillingbury Road  
F 023 80810449

Chandlers Ford  
E rpsa@rpsgroup.com

Hampshire  
S053 5SS  
W www.rpsgroup.com

■ Client: Taylor Wimpey Southern Counties

Project: Old Park Farm, Waterloo

Title: **Stream Corridor Proposals**

Date: 12/11 Scale: 1:250 Paper Size: A1

Drawn: NJ Checked: DC Job Ref: JSL 1864

■ Drawing Number: **501** Rev: **B**

www.rpsgroup.com