


PERMIT

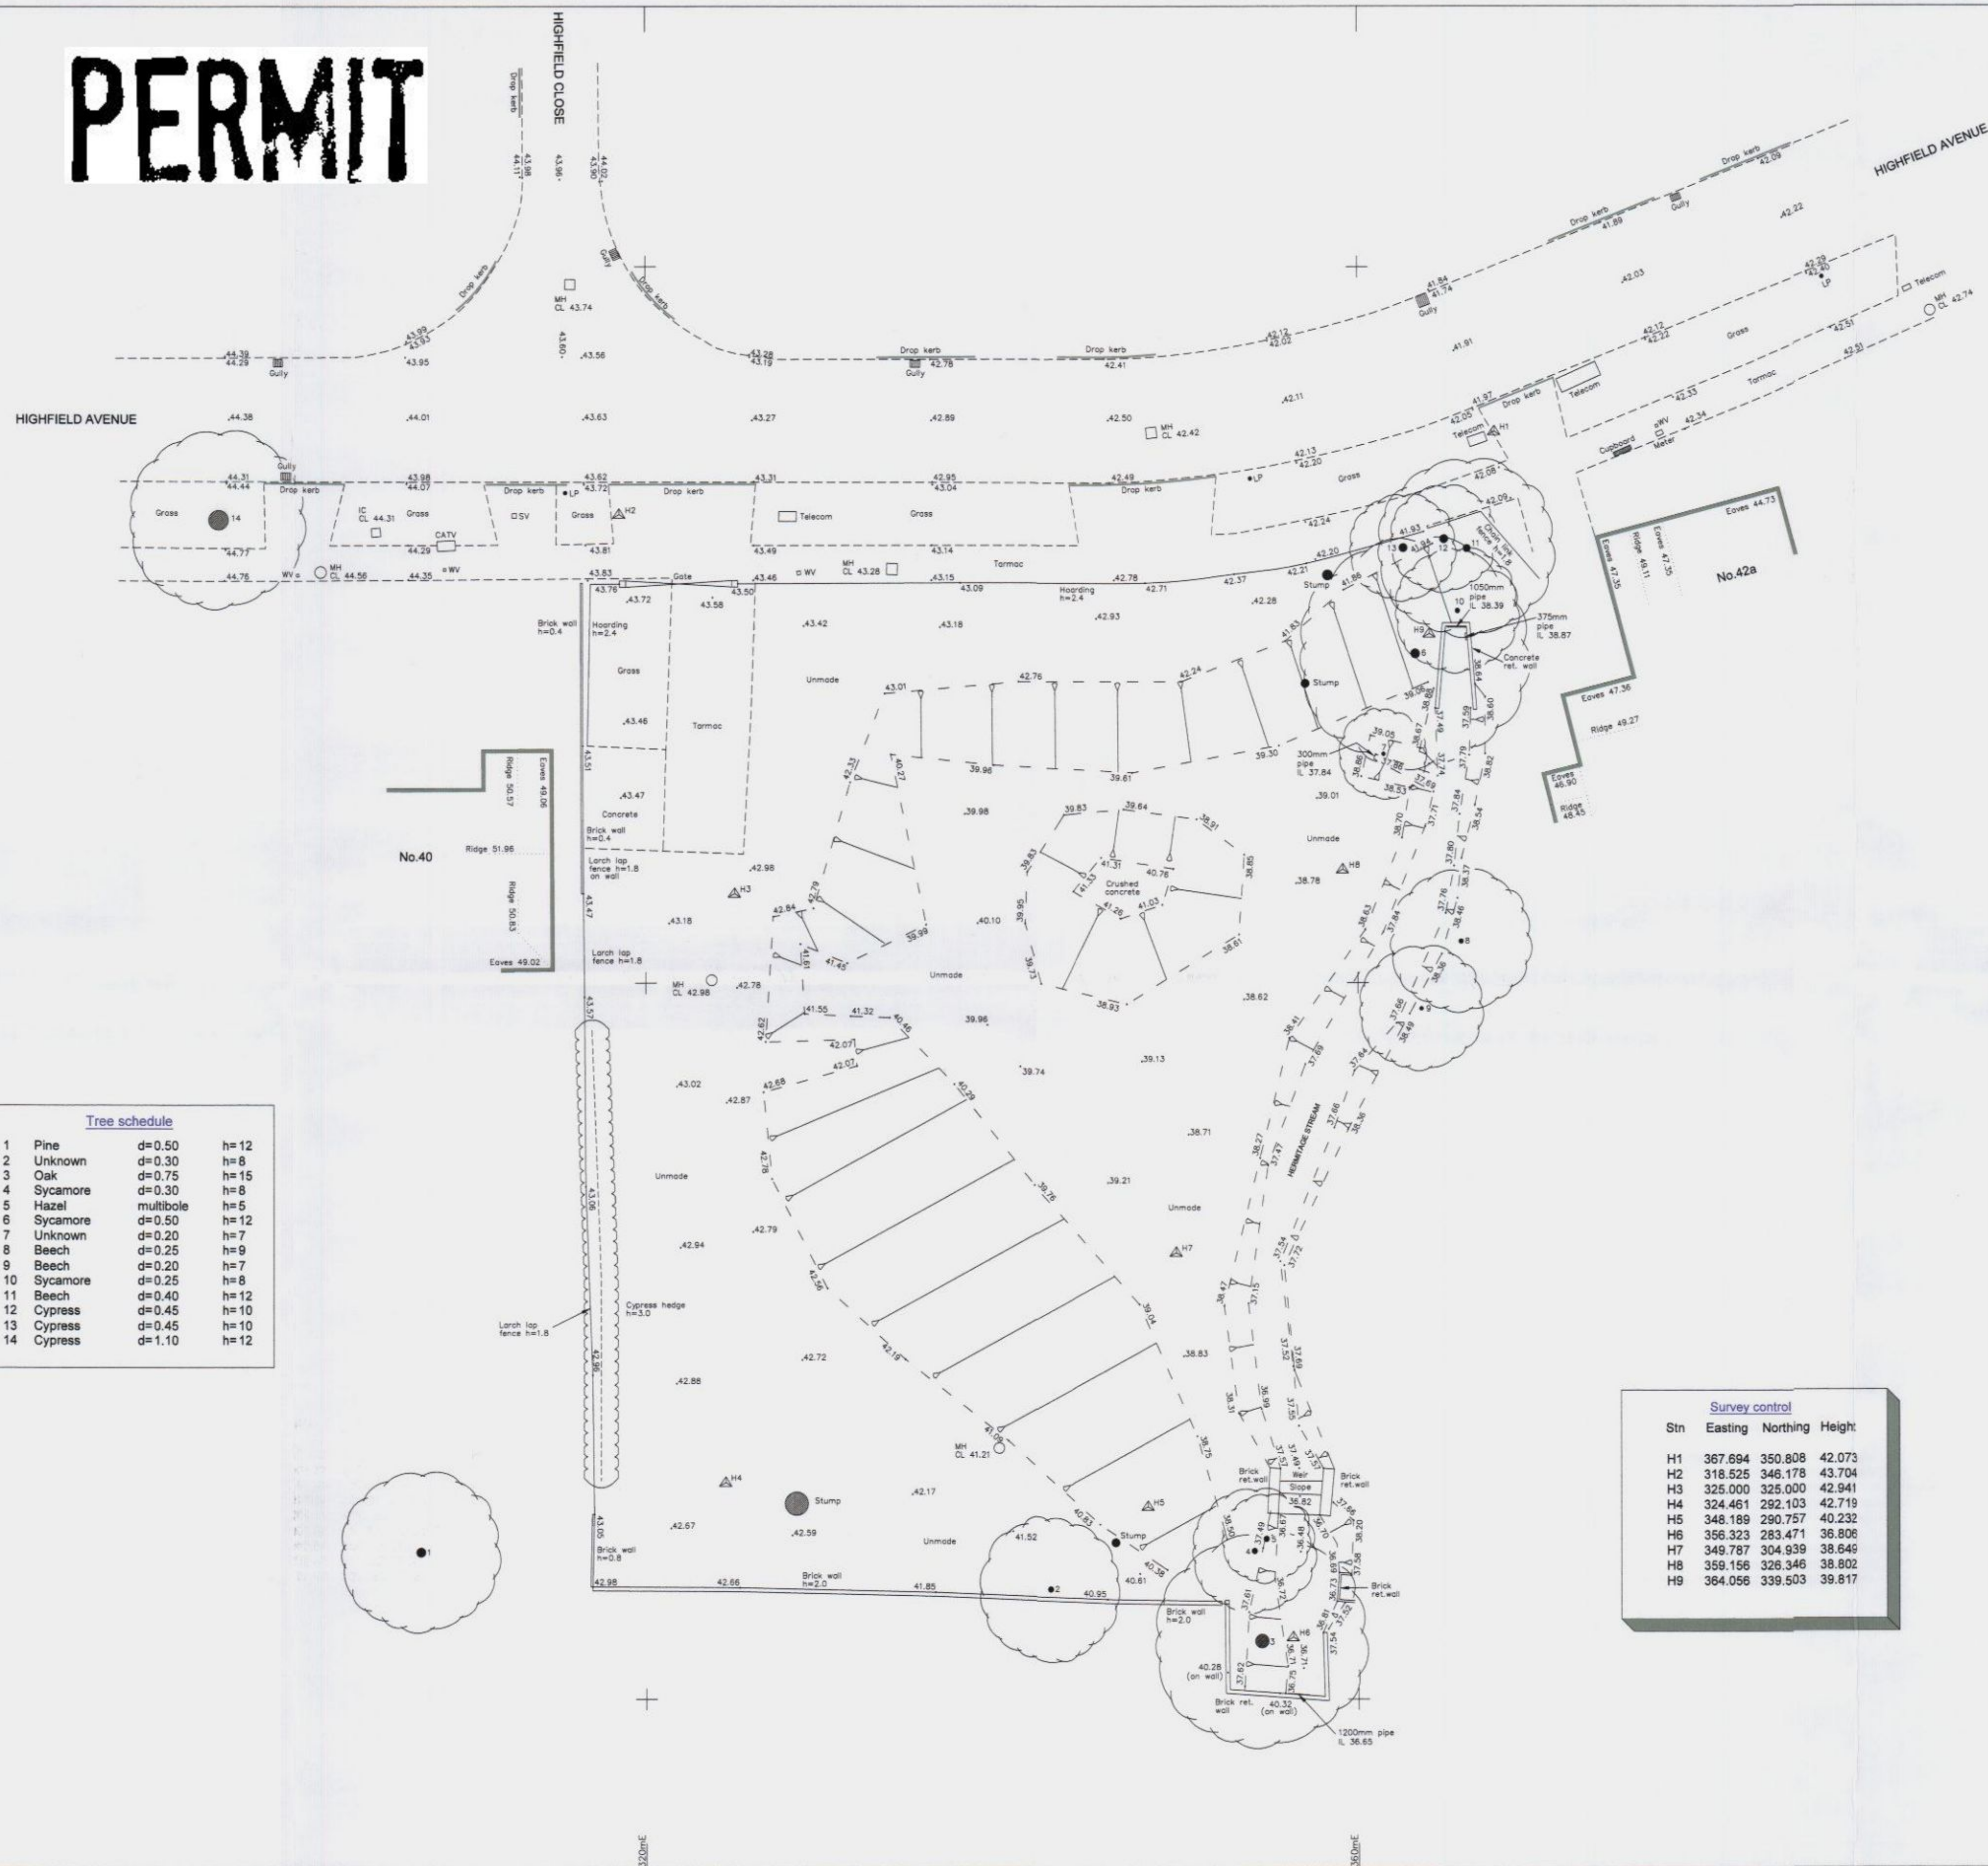

Tree schedule			
1	Pine	d=0.50	h=12
2	Unknown	d=0.30	h=8
3	Oak	d=0.75	h=15
4	Sycamore	d=0.30	h=8
5	Hazel	d=0.30	h=5
6	Sycamore	d=0.50	h=12
7	Unknown	d=0.20	h=7
8	Beech	d=0.25	h=9
9	Beech	d=0.20	h=7
10	Sycamore	d=0.25	h=8
11	Beech	d=0.40	h=12
12	Cypress	d=0.45	h=10
13	Cypress	d=0.45	h=10
14	Cypress	d=1.10	h=12

Survey control			
Stn	Easting	Northing	Height
H1	367.694	350.808	42.073
H2	318.525	346.178	43.704
H3	325.000	325.000	42.941
H4	324.461	292.103	42.719
H5	348.189	290.757	40.232
H6	356.323	283.471	36.806
H7	349.787	304.939	38.649
H8	359.156	326.346	38.802
H9	364.056	339.503	39.817

© Copyright 2011 Hook Survey Partnership
The Copyright of these Plans shall remain vested with Hook Survey Partnership who will grant an irrevocable licence for use by the Client once payment has been received in full. No Third Party may use the plans even if payment has been made to the Client but not received by the Company. Please see our terms and conditions of supply at www.hooksurvey.com for further details.

Hook Survey Legend

Hedge: [Symbol] Telephone line: [Symbol]
Undergrowth: [Symbol] Power line: [Symbol]
Tree: [Symbol] Banking: [Symbol]
Bush: [Symbol] Contour line: 6.4
Building: [Symbol] Survey Station: H5
Glass Building: [Symbol] Gate: [Symbol]
Open Building: [Symbol] Level: 115.28

Ordnance Survey Benchmark: OSBM
Foul Drainage: 100mm F.W. MH CL 117.10 S. 116.75
Storm Drainage: 100mm S.W. MH CL 117.10 S. 116.75

Abbreviations

Animal Set	Sett
Air Valve	AV
Borehole	BH
Bus Stop	BS
Cover Level	CL
Earth Rod	ER
Electricity Pole	EP
Fire Hydrant	FH
Inspection Cover	IC
Invert Level	IL
Lamp Post	LP
Manhole	MH
Marker	MK
Name Plate	RNP
Power Pole	PP
Rain water Pipe	RWP
Road Sign	RS
Rodding Eye	RE
Reinforced Steel Joint	RSJ
Soil Vent Pipe	SVP
Stop Valve	SV
Survey Station	STN
Telegraph Pole	TP
Tree Stump	Stump
Trial Hole	TH
Unable To Lift	UTL
Vent Pipe	VP
Water Valve	WV

Notes

All trees are identified where possible. Species, spread, height and girth are indicative only.

Drainage has been surveyed where found, and traced where possible.

Eaves and ridge heights of surrounding buildings have been surveyed where possible.

HOOK SURVEY PARTNERSHIP

Project: No. 42 Highfield Avenue, WATERLOOVILLE, P07 7PX

Client: Turnbull Group

Drawing title: Topographical Survey

Job No.: S11/3307	Dwg No.: S11/3307/01	Revision: -
Scale: 1:200	Date: December 2011	Drawn by: N.B.

Grid & Levels related to:
Grid is arbitrary and is shown at 40m intervals.
OSBM situated on No. 167 London Road value 48.24m

HOOK SURVEY PARTNERSHIP
Unit 3 Whiffens Farm
Clement Street
Hextable, Nr Swanley
Kent BR8 7PQ

Tel: 01322 660662
Fax: 01322 618651
Email: mail@hooksurvey.com
Website: www.hooksurvey.com

THE SURVEY ASSOCIATION

HAVANT BOROUGH COUNCIL
10 APR 2012
RECEIVED