Opening window areas to be minimum 1/20th of enclosed floor areas. All new windows to be fitted with minimum 8000sq.mm. trickle vents per room. Maximum area of double glazed window not to exceed 25% of floor areas

New windows: new double glazed windows to have minimum U value of 1.6w/m²k. Doors to have a min U value of 1.80w/msq.k. Toughened glass in glazed doors and windows in critical locations. i.e.: alongside doors. Seal around window-wall joint with mastic sealant. Double rafters as roof light trimmers if applicable.

Minimum full opening size of escape window 0.33sq.m. min clear dimension of edge 450mm with cill below 1.10m from floor and above 800mm.

Duct mechanical extract from internal wc/bathroom rated to give min 3ach with up to 15minute overrun. Wired to light switch. Min 12mm air gap under door.

Steelwork: see structural calcs for sizes. Minimum bearing 100mm on concrete padstones, prestressed concrete lintols or metal bearing plates. Encase in minimum two layers 12.5mm plasterboard for half hour fire resistance when fitted at floor levels. Lengths of steels to be site measured to include bearings.

Floor in roofspace: 21mm floor grade tongued and grooved chipboard, 2.3 grade in bathrooms on **50** mm x **200** mm joists at **400** mm centres. Joists to be doubled where under and parallel to partitions over. Solid strut at third centres of joists spanning more than 2.40m. Remaining roof spaces to be floored as main area when joists extend out to outer walls. 'Simpson strongtie' or similar galvanised joist hanger connection to steelwork where applicable. Purpose made ms shoe /hanger where fitch beams join to steelwork or other fitch beams. Fit min 100mm mineral wool batts between joists for sound insulation.

Studwork enclosing stairwell: 12.5mm plasterboard each side of minimum 75 x 50mm studwork with taped and filled joints for minimum half hour fire resistance.

Inner partition: 12.5mm plasterboard each side of minimum 75 x 50mm studwork. Fit 25mm sound insulation quilt between held in place with battens.

Ceilings: 12.5mm foil back plasterboard on **50** x **150** mm joists at **400** mm centres with 100mm glass fibre quilt between joists and Celotex GA4090 batts over the joists. Bolt and dog tooth washers at joints. Fit baffle boards at eaves to maintain clear air flow.

Conversion of existing roofspace.
Sloping ceilings, Plant on, or fit alongside existing rafters to achieve 150mm depth. See section for detail. Fit Celotex GA4100 batts between rafters and Celotex TB4035 beneath rafters. 12.5mm foil back plasterboard finish. Maintain 50mm air gap to underside of roof covering.

Stairs: New staircase dimensions to be confirmed on site prior to manufacture. Maximum rise 220mm, minimum going on tread 220mm with minimum 16mm nosings. minimum going on winders 50mm. Minimum clear width **800** mm, maximum pitch 42 degrees, minimum 2.0m clear vertical headroom off pitchline over new and existing stairs. Handrails minimum 900mm with vertical balusters at maximum 100mm centres. Allow to pack off party/outer wall to accommodate any required dry lining of wall above.

Stair practical limits: Stair risers and goings to be within the practical limits of risers 155/220 to be used with goings 245/260. OR risers 165/200 to be used with goings 223/300mm

Existing ceilings: if good condition plaster and lath ceilings, to remain. If 9mm plasterboard, to be over laid between joists with 60mm mineral wool batts on chicken mesh support in areas not covered in flooring note.

Dormer walls: tile/ slate hanging on battens and breathable felt on 100mm x 50mm studwork with 12.5mm foil back plasterboard finish over Celotex GA4070 batts between studs flush with outer face of studs (30mm cavity) and Celotex TB4012 across the face of the studs. Tape and mastic joints.(12.5mm plasterboard on cheeks where within 1.00m of boundary). Also fit 6mm masterboard web under cheek felt where within 1.00m of boundary. Triple rafters under cheeks. Sheath with 12.5mm marine ply under felt for additional lateral support.

Dormer warm flat roof: Three layer built up felt to BS747 cp144 pt3 on Celotex TD4126 decking on firrings and **50** mm x **150** mm joists at **400** mm ctrs. 12.5mm foil back plasterboard ceiling. Seal warm roof from existing vented roof space at join if applicable.

Fit proprietary dry ridge vent system, or high level tile vents equivalent to 5mm continuous gap, fit eaves vents front, rear and dormers (if applicable,) equivalent to 25mm continuous gap.

Drainage all drainage to BS EN752 plus approved doc H 100mm diam. PVC drain ware minimum fall 1-40 in 150mm concrete surround to new or existing inspection chamber on existing run. Bridge with concrete lintols over where passing beneath new walls and flexible packing surround. Exact position, invert and direction of all existing drains to be determined and agreed on site **PRIOR** to commencement of works.

New inspection chamber sizes to suit invert of drains minimum sizes 600 x 450mm internal with 103mm semi engineering brickwork sides 215mm where invert exceeds 1000mm, built up from 150mm concrete slab base and fitted medium duty cover and frame.

Plumbing all to BS EN 2056 plus approved doc H 38mm diam. wastes from sink, bath and shower. 32mm diam. Waste from wash hand basins, all with rodding access on changes of direction and with deep seal traps. Run to existing/new 100mm diam pvc svp terminating min 900mm above nearest window head and with rodding access at the base.

Taps: All hot water taps to be fitted on the left hand side of the appliance.

New 100mm diam. PVC soil and vent pipe to terminate min. 900mm above window heads and with rodding access at base.

Rain water goods: run new 100mm diam pvc rain water guttering and 70mm diam downpipes to existing drainage system.

All new electrical works to be designed, installed, inspected and tested in accordance with BS7671 (IEE.17th Ed) the works are to be undertaken by an installer registered under a suitable self certification scheme or by a suitably qualified person with a certificate of compliance produced to building control upon completion of the works.

Lighting. Fit high efficacy light fittings minimum one per four new fittings. Any recessed ceiling lights to be 30minute fire resisting.

SD O smoke detectors fit smoke detector system wired to mains supply and to each other with battery back up system. One per floor minimum. All installed to BS 5839:6.2004 To be over 300mm from doors, walls and light fittings

All new radiators to be fitted with TRVs

Each joist to be bolted to each other where lapped and to each roof joist to help prevent roof spread.

Strapping provided to joists either side of steel to prevent roof spread.

Provide double rafters either side of velux window.

ALL DIMENSIONS TO BE CHECKED ON SITE. ANY DISCREPANCIES ARE TO BE MADE KNOWN TO THE ARCHITECT AS SOON AS POSSIBLE.


SEE STRUCTURAL CALCULATIONS FOR STEEL OR TIMBER DETAILS. THE CONTRACTOR IS TO SITE MEASURE ALL STRUCTURAL MEMBERS AND STAIRCASE,BEFORE ORDERING.

THE PROPERTY OWNERS ARE TO ENSURE THAT ANY/ALL REQUIREMENTS OF THE PARTY WALL ACT ARE COMPLIED WITH. ADVICE CAN BE OBTAINED FROM THE ARCHITECT.


EXISTING LINTOLS AND FOUNDATIONS TO LOADBEARING WALLS TO BE EXPOSED FOR LOCAL AUTHORITY INSPECTION AND APPROVAL AS REQUIRED.NORMALLY AT THE START OF WORKS WHEN DRAINAGE RUNS ARE CHECKED.

CONTRACTOR IS TO CONFIRM THAT ALL NECESSARY LOCAL AUTHORITY APPROVALS HAVE BEEN OBTAINED BEFORE COMMENCING WORKS. COMMENCEMENT OF ANY WORKS PRIOR TO THIS IS ENTIRELY AT THE CLIENTS OR CONTRACTORS RISK. CHANGES TO THE SCHEME CARRIED OUT WITHOUT THE ARCHITECTS APPROVAL MAY INVALIDATE THEIR LIABILITY.


Gable wall build up as dormer walls. Tie to roof joists with 1000 x 32 x 5mm M.S. galvanised straps at 1200mm centres. Fit cavity tray at horizontal junction with existing cavity wall if not insulated.

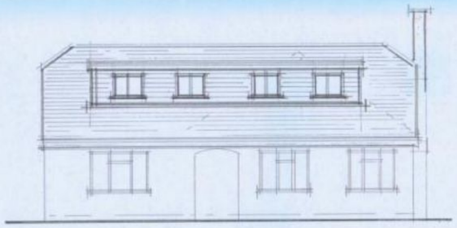


proposed front elevation - 1:100

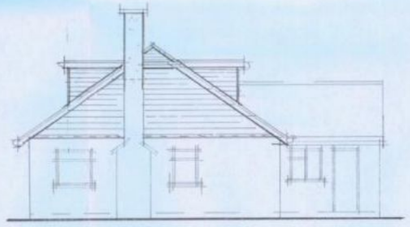


proprosed side elevation - 1:100

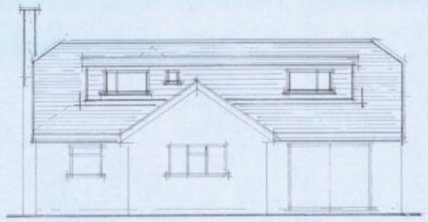

proposed rear elevation - 1:100

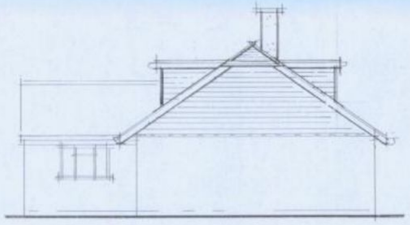


proposed side elevation - 1:100




proposed roof plan - 1:200




existing front elevation - 1:100

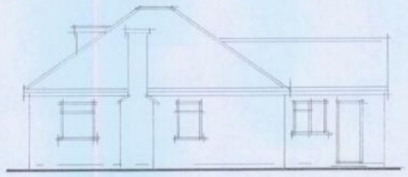


existing side elevation - 1:100

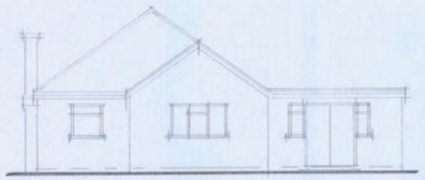

existing rear elevation - 1:100

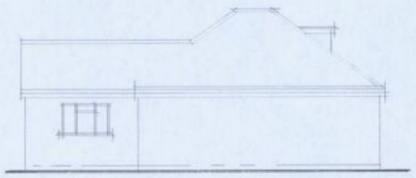

existing side elevation - 1:100



existing roof plan - 1:200

Note:

B	JAN 11	CLIENT ALTERATIONS.
A	NOV 10	BUILDING REG. ENQUIRIES
	Date	Revision

© copyright

THORNS-YOUNG
ARCHITECTURAL

THORNS-YOUNG LTD
253 London Road, North End, Portsmouth, PO2 9HA
tel 02392 697 200 - fax 02392 696 333

PERMIT

Client
mr & mrs a goulding

Job Title
71 sandy point road
hayling island

Drawing Title
elevations., roof plans

HAVANT BOROUGH COUNCIL
24 MAR 2011
RECEIVED

Scale 1:100 , 1:200

Date june '10 | Drawn by sa

Drg. No. 3089.10.2. | Rev. B C

MERCURY GRAPHICS 537451