

LANGSTONE PARK

Batch 1 signage

April 2021

Indent.



TOTEMS

A (4m)



B (4m)



C (4m)



D (3m)



M1 & M2



**LANGSTONE
PARK**

**ALL
ENQUIRIES**

**Lambert
Smith
Hampton**


01489 579 579



020 7493 4933

www.langstonepark.com

BUILDING 1000 NORTH FRONTAGE

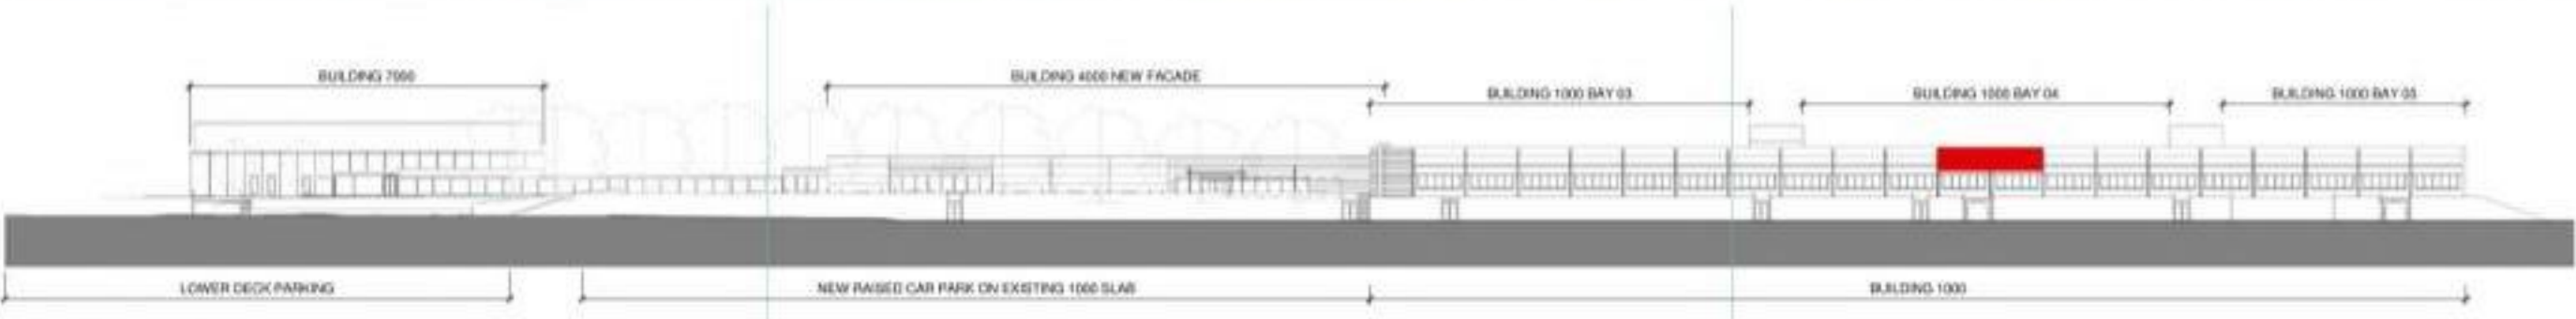

SIGNAGE SURVEY + BATCH 1 SIGN POSITIONS





P LANGSTONE
PARK



A

LANGSTONE
PARK

MT

Langstone Fish





LANGSTONE
PARK



Goods inward
Loading bay



Parking

D



M2

SIGNAGE BATCH 1 PRODUCTION ESTIMATE

MAIN ENTRANCE

Estate totem A

Internal mild steel frame with baseplates. Oxide coated and bolted down to a pre-formed concrete foundation.
3mm aluminium sign panels with folded inverted returns, finished to RAL colour and fitted to steel frame.
20mm detail logo finished to RAL colour bonded to sign face with VHB tape and face applied self adhesive vinyl detail
1500mm x 4000mm
Groundworks, waste and signage disposal, hiab and installation
£6200

New marketing board M1

Full colour digitally printed ACM panels. Fitted to white coated side mounted steel posts. Posts concreted into position. Inc installation
2440mm x 3000mm
£1400

Wayfinding totem B

Internal mild steel frame with baseplates. Oxide coated and bolted down to a pre-formed concrete foundation.
3mm aluminium sign panels with folded inverted returns, finished to RAL colour and fitted to steel frame.
20mm detail logo finished to RAL colour bonded to sign face with VHB tape and face applied self adhesive vinyl detail
1500mm x 4000mm
Groundworks, waste and signage disposal, hiab and installation
£6200

Building 6000

To remove and dispose of building 6000 logo
£720

Total £14520 plus VAT

HARTS FARM WAY

Estate Totem C

Internal mild steel frame with baseplates. Oxide coated and bolted down to a pre-formed concrete foundation.
3mm aluminium sign panels with folded inverted returns, finished to RAL colour and fitted to steel frame.
20mm detail logo finished to RAL colour bonded to sign face with VHB tape and face applied self adhesive vinyl detail
1500mm x 4000mm
Groundworks, waste and signage disposal, hiab and installation
£6200

New marketing board M2

Full colour digitally printed ACM panels. Fitted to white coated side mounted steel posts. Posts concreted into position. Incs installation
2440mm x 3000mm
£1400

Wayfinding totem D

Internal mild steel frame with baseplates. Oxide coated and bolted down to a pre-formed concrete foundation.
3mm aluminium sign panels with folded inverted returns, finished to RAL colour and fitted to steel frame.
20mm detail logo finished to RAL colour bonded to sign face with VHB tape and face applied self adhesive vinyl detail
1500mm x 3000mm
Groundworks, waste and signage disposal, hiab and installation
£5150

Building 1000 (Spec 2)

13160 x 3525 x 50mm
Folded aluminum tray powder coated to RAL.
10mm wet sprayed acrylic logo and letters bonded to the face. Approx. size 525 x 4350. Vinyl details applied at the bottom.
Fixed to building on carrier rails.
£9276 plus VAT

Total £22026 plus VAT

TOTAL BOTH ENTRANCES £36546 plus VAT

INDENT THANKS YOU



Indent Design Limited

2 Denmark Road

Reading RG1 5PA

0118 9861672

┌ IF YOU PUT
ENOUGH
SMART PEOPLE
TOGETHER IN ONE
SPACE, GOOD
THINGS HAPPEN
ERIK HERSMAN