

Contamination Assessment: Site of former Underground Fuel Tank

CLIENT	Paul Scammel
SITE ADDRESS	157 Milton Road, Cowplain, Hampshire, PO8 8RE. The site location plan is provided in Figure 1. The site development area can be seen in Figure 2 and an aerial view in Figure 3.
PROJECT NUMBER	GWPR2677. This reports Terms and Conditions can be seen within Appendix A.
ENGINEER ON-SITE	James Harvey, Ground and Water Limited
DATE	24 th July 2018
RELEVANT DOCUMENTATION	This Report must be read in conjunction with the following: • Ground and Water Desk Study Report – GWPR1606/DS/May 2016 • Ground and Water Ground Investigation Report – GWPR1606/GIR/May 2016 • Ground and Water Remediation Validation Certificate – GWPR2540/RVC/ June 2018
GEOLOGY	The British Geological Survey Solid and Drift Geology Map for the Fareham area (Sheet no. 316) revealed the site to be situated on the superficial Head deposits overlying the bedrock deposits of the London Clay Formation. No areas of Worked Ground or Made Ground were noted in a 250m radius of the site.
HYDROGEOLOGY and HYDROLOGY	A study of the aquifer maps on the Environment Agency website revealed the site to be located on a Secondary (Undifferentiated) Aquifer relating to the superficial deposits of the Head Deposits and Unproductive Strata relating to the bedrock deposits of the London Clay Formation.

Superficial (Drift) deposits are permeable unconsolidated (loose) deposits, for example, sands and gravels. The bedrock is described as solid permeable formations e.g. sandstone, chalk and limestone.

Secondary aquifers include a wide range of drift deposits with an equally wide range of water permeability and storage capacities. Secondary (A) Aquifers are permeable layers capable of supporting water supplies at a local rather than strategic scale, and in some cases forming an important source of base flow to rivers. These are generally aquifers formerly classified as minor aquifers;

Unproductive strata are rock layers with low permeability that have negligible significance for water supply or river base flow. These were formerly classified as non-aquifers.

Examination of the Environment Agency records showed that the site fell within a **Zone I (Subsurface Activity)** Groundwater Source Protection Zone (SPZ) as classified in the Policy and Practice for the Protection of Groundwater.

The nearest surface water features to the site was a small stream ~560m north, an unidentified brook ~850m south-west and Billy's Lake ~770m north-west of the site.

From analysis of hydrogeological and topographical maps groundwater was anticipated to be encountered at shallow to moderate depth (2.00m - 5.00m) below existing ground level (bgl) and it was considered that groundwater was flowing in a south-westerly direction in line with local topography towards the Wallington River.

Examination of the Environment Agency records showed that the site was situated within an area benefitting from flood defences and an Environment Agency **Flood Zone 1**.

**PROPOSED
REMEDIAL
STRATEGY &
REMEDIAL
UNDERTAKEN**

Human Health – Tank removal and potential TPH contamination

It was recommended that further investigation would be required once the underground fuel tanks had been removed from beneath the former car park, to confirm that no leaks or spillages have occurred.

Five tanks were removed from the car park and placed in the north-west corner of the site. Each tank was cylindrical in shape and was approximately 2.10m tall by 4m long. The excavation left a pit of ~7.60m x 15.70m. The initial depth of the pit is unknown but believed to be ~2.10m due to the height of the tanks. Upon removal of the tanks the pit was partially backfilled to ensure stability of the party wall. Photos of the site, pit and tanks can be seen in Appendix B.

**INVESTIGATION
LOCATIONS & SCOPE
OF WORK**

A site visit was undertaken by a Ground and Water Limited Technical Crew on the 25th June 2018. The site works comprised the drilling of 5 No. Windowless Sampler Boreholes (WS1 – WS5) to depths of between 2.00m – 3.00m bgl to obtain samples from the base and sides of the pit to inspect and sample the soils surrounding the removed underground fuel tank. WS5 was drilled at a lower ground level from the base of the pit 1.00m below current ground level. The boreholes were drilled following removal of the tanks and partial backfilling. The partial backfilling was required to ensure stability of a party wall.

**GROUND
CONDITIONS**

The boreholes revealed Made Ground surrounding the former tanks was encountered from ground level to depths of between 1.00m – 2.30m bgl. The Made Ground was underlain by Head Deposits and then the Lambeth Group. A Trial Hole Location plan can be seen in Figure 5. A broad summary of the strata encountered can be seen below and overleaf.

Broad Summary of Strata Encountered (WS1 – WS5)		
Strata	Depth Encountered (m bgl)	Thickness (m)
MADE GROUND: (WS3) Concrete.	GL	0.05
MADE GROUND: (WS1) Grey sandy gravel. Sand was fine to coarse grained. Gravel was abundant, fine to medium, sub-angular to sub-rounded flint, brick and concrete.	GL	0.35
MADE GROUND: (WS2, WS3, WS4 & WS5) Brown/grey gravelly sand. Sand was fine to coarse grained. Gravel was occasional - abundant, fine to cobbles, sub-angular to sub-rounded flint, brick and concrete.	GL – 1.00	0.25 – 1.10
MADE GROUND: (WS2, WS4) Red/brown sandy gravelly clay. Sand was fine to coarse grained. Gravel was abundant, fine to coarse, sub-angular to sub-rounded flint, brick and concrete.	0.25 – 2.10	0.20 - 1.15
MADE GROUND: (WS1) Sub-base. Red gravelly sand. Sand was fine to coarse grained. Gravel was occasional to abundant, sub-angular to sub-rounded flint, brick and concrete.	0.35	0.35
MADE GROUND: (WS1, WS4) Dark brown red grey locally clayey sandy gravel. Sand was fine to coarse grained. Gravel was abundant, fine to coarse, sub-angular to sub-rounded flint, brick, concrete and carbonaceous material.	0.70	0.30 – 0.70
MADE GROUND: (WS3) Grey clayey gravelly sand. Sand was fine to coarse grained.	1.00	0.60

Gravel was occasional to abundant, fine to medium, sub-angular to sub-rounded flint. Which became dark brown/black with carbonaceous material and concrete.		
HEAD DEPOSITS: (WS1 & WS5) Brown gravelly SAND. Sand was fine to coarse grained. Gravel was abundant, fine to coarse, sub-angular to sub-rounded flint.	1.00 – 2.10	0.90 - 2.00
HEAD DEPOSITS: (WS2 & WS3) Brown red/grey sandy silty gravelly CLAY. Sand was fine to medium grained. Gravel was rare to abundant fine to medium, angular to sub-rounded flint.	1.40 – 1.60	0.20 - 1.60
LAMBETH GROUP: (WS3, WS4) Brown grey silty CLAY.	1.80 – 2.30	0.70 - 1.20

A strong hydrocarbon type (diesel) odour was noted within all trial holes at varying depths between ground level and 3.00m bgl. A summary can be seen overleaf.

Broad Summary of Hydrocarbon Odours Encountered (WS1 – WS5)	
Trial Hole	Depth Encountered (m bgl)
S1	0.70
WS2	0.30 – 1.40
WS3	GL – 1.00
WS4	GL – 2.00 (strongest at 0.80 – 1.00)
WS5	1.00 – 3.00

For more details on the encountered ground conditions please refer to the trial hole logs in Appendix C.

ROOTS

Roots were identified between ground level and 2.00m bgl in WS2, WS3 and WS5.

GROUNDWATER

No groundwater was encountered within the trial holes, however samples were recovered as wet in WS4 at 1.80m – 2.00m bgl.

CONTAMINATION TESTING

7No. samples were screened for Leachate and TEXAS EPH testing comprising speciated TPH Fuel Oils, including a full aliphatic/aromatic split and BTEX compounds as these were the contaminants of concern identified in the Conceptual Site Model (Ground and Water Ground Investigation Report – GWPR1606/GIR/May 2016). The depth of sampling and type of material can be seen below:

- WS1/0.80 – Made Ground
- WS2/0.50 – Made Ground
- WS3/1.30 – Made Ground
- WS4/1.80 – Made Ground
- WS4/2.80 – Made Ground
- WS5/2.30 – Head Deposits
- WS5/2.80 – Head Deposits

Testing was undertaken to review the presence of any residual contamination from the sides and base of the

tank removal void/area. The results of the screening can be seen in Appendix D.

HUMAN HEALTH RISK ASSESSMENT	The results of the chemical laboratory testing were compared to the LQM/CIEH Suitable 4 Use Levels (S4UL) for a 'Residential with homegrown produce' land-use scenario, as this was considered the most appropriate land-use scenario. A proposed development plan can be seen in Figure 4 and the Assessment Criteria can be seen in Appendix E. No levels of Speciated TPH Aliphatic/Aromatic or BETEX compounds were found to exceed the guideline levels for a 'Residential with Home-grown Produce' land-use scenario within the seven samples tested.
-------------------------------------	---

GROUNDWATER RISK ASSESSMENT The site was situated on a **Secondary (Undifferentiated) Aquifer** relating to the superficial deposits of the Head Deposits and **Unproductive Strata** relating to the bedrock deposits of the London Clay Formation.

Examination of the Environment Agency records showed that the site fell within a **Zone 1 (Subsurface Activity)** Groundwater Source Protection Zone (SPZ) as classified in the Policy and Practice for the Protection of Groundwater.

The results of the eluate/leachate analysis can be seen tabulated overleaf.

Tabulated Results For Eluate/Leachate Results				
Determinant	Units	EQS Source	EQS Level	Samples where EQS Level was exceeded
(EPH Texas (C6 - C40))	µg/l	PWSR	10	WS2/0.50 (35µg/l), WS5/2.30 (212µg/l) and WS5/2.80m bg (169µg/l).
Notes DWS = UK Drinking Water Standards EQS = Environmental Quality Standard for Protection of Aquatic Life (Freshwater or Saltwater) PWSR = Private Water Supplies Regulations (1991) (1) Sum of benzo(b)fluoranthene, benzo(k)fluoranthene, benzo(ghi)perylene and indeno(1,2,3-cd)pyrene				

* Although the DWS for TPH has been withdrawn it is our understanding from the Environment Agency that in the absence of other guidance the Drinking Water Standard for Petroleum Hydrocarbons should be used in these cases.

The chemical testing identified three elevated levels relating to EPH Texas (C8 – C12) in WS2/0.50, EPH Texas (C8 – C21) in WS5/2.30 and EPH Texas (C6-C21) in WS5/2.80, above the guideline EQS values.

Based on the above it was concluded that some residual hydrocarbons are present in the soils around the removed tank. Where these are slightly elevated in the lighter end spectrum these hydrocarbons are mobile.

However, given the limited extent of such light end hydrocarbons (limited to central and southern part of site tank area), the likely attenuation of light end hydrocarbons that will now occur with source removal, and no surface water features in a close proximity to the site, the risk posed to the secondary aquifer was considered to be very low.

The cohesive nature of the underlying Lambeth Group will provide protection to the any deeper aquifer which could be utilised for water abstraction (i.e. chalk).

CONCLUSIONS

No levels of Speciated TPH Aliphatic/Aromatic or BETEX compounds were found to exceed the guideline levels for a '*Residential with Home-grown Produce*' land-use scenario therefore there is no vapour risk and no further remediation required.

No significant risk to controlled waters is deemed to be present by the residual lighter end hydrocarbons detected during the investigation.

Following source removal any residual hydrocarbons will attenuate with time.

Date: 25th July 2018

Signed:



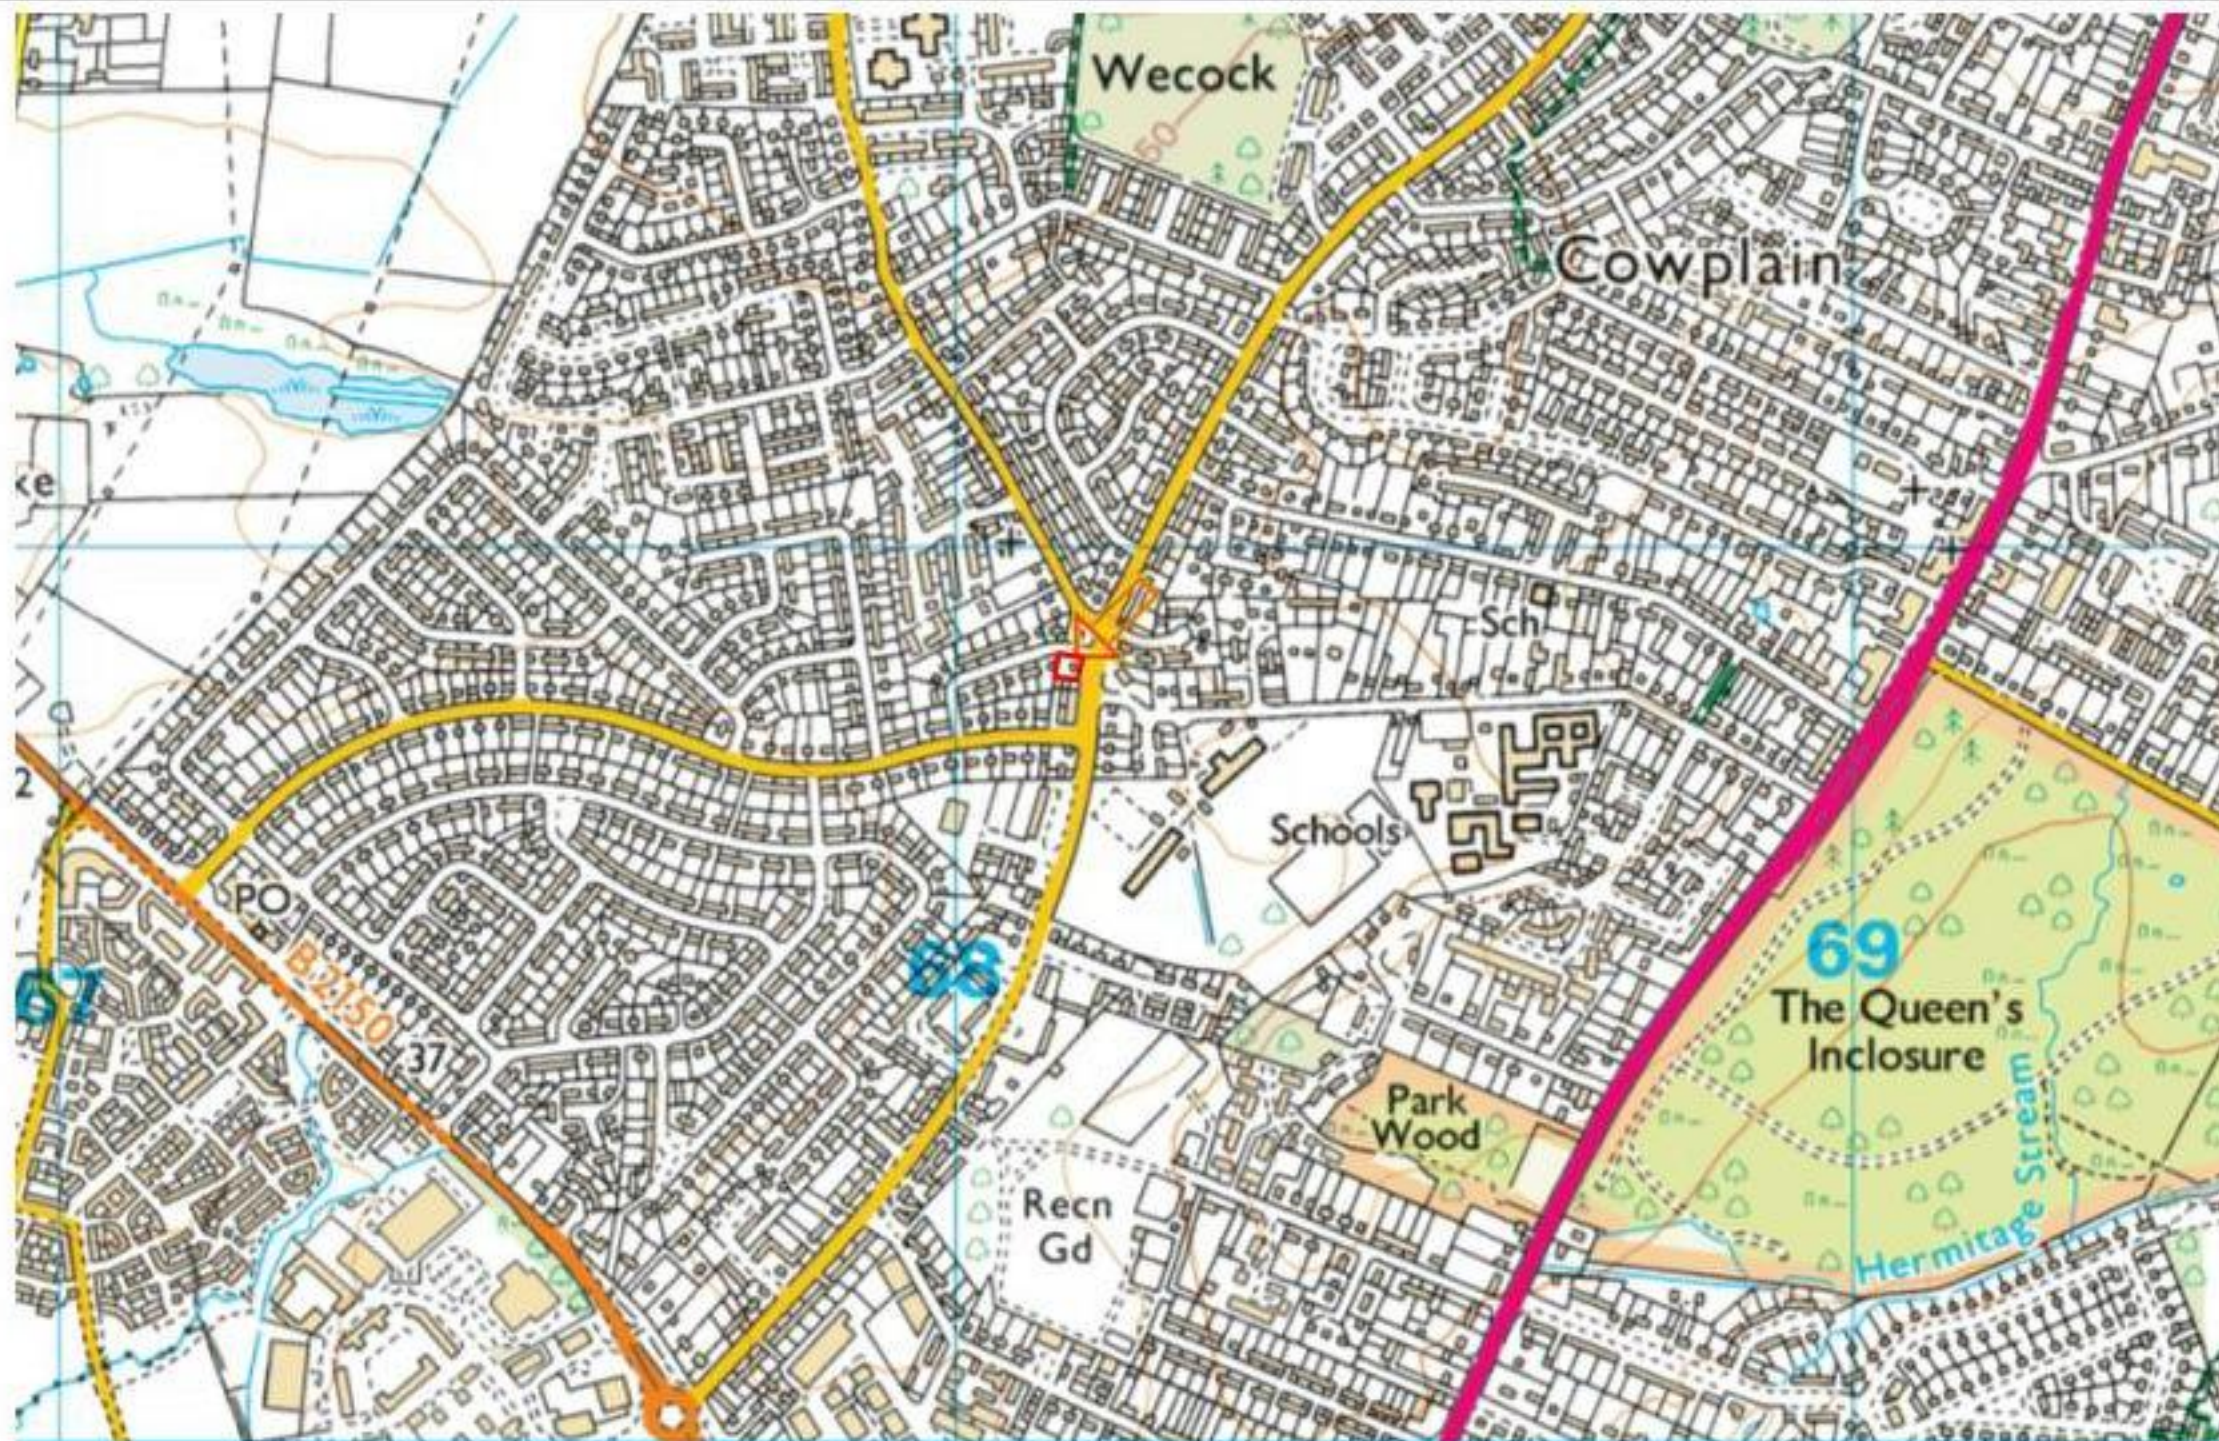
James Harvey

(Student Placement)

Geotechnical and Geo-Environmental Engineer – Ground and Water Limited

The following Figures and Appendices complete this report:

Figure 1	Site Location Plan
Figure 2	Site Development Area
Figure 3	Aerial View of Site
Figure 4	Proposed Development Plan
Figure 5	Trial Hole Location Plan
Appendix A	Terms and Conditions
Appendix B	Photo plate
Appendix C	Trial Hole Logs
Appendix D	Chemical Laboratory Test Results
Appendix E	Soil Assessment Criteria



APPROXIMATE SITE BOUNDARY

NOT TO SCALE

Project:	157 Milton Road, Cowplain, Hampshire PO8 8RE		Figure 1 ground&water
Client:	PD Scammell Ltd	Date:	
	Site Location Plan	Ref:	
			July 2018
			GWPR2677



NOT TO SCALE



APPROXIMATE SITE BOUNDARY

NOT TO SCALE

Project:

157 Milton Road, Cowplain, Hampshire PO8 8RE

Client:

PD Scammell Ltd

Date:

July 2018

Ref:

GWPR2677

Aerial View of Site

Figure 3

ground&water



APPROXIMATE SITE BOUNDARY

NOT TO SCALE

Project:		157 Milton Road, Cowplain, Hampshire PO8 8RE	
Client:		PD Scammell Ltd	Date: July 2018
Proposed Development Plan View			Ref: GWPR2677

Figure 4

ground&water

Location of
the 5 tanks
after
removal



Key

Void
Excavation

NOT TO SCALE

Project:	157 Milton Road, Cowplain, Hampshire PO8 8RE		Figure 5 ground&water
Client:	PD Scammell Ltd	Date:	
		Ref:	
	Trial Hole Location Plan		

APPENDIX A

Conditions and Limitations

The ground is a product of continuing natural and artificial processes. As a result, the ground will exhibit a variety of characteristics that vary from place to place across a site, and also with time. Whilst a ground investigation will mitigate to a greater or lesser degree against the resulting risk from variation, the risks cannot be eliminated.

The report has been prepared on the basis of information, data and materials which were available at the time of writing. Accordingly any conclusions, opinions or judgements made in the report should not be regarded as definitive or relied upon to the exclusion of other information, opinions and judgements.

The investigation, interpretations, and recommendations given in this report were prepared for the sole benefit of the client in accordance with their brief; as such these do not necessarily address all aspects of ground behaviour at the site. No liability is accepted for any reliance placed on it by others unless specifically agreed in writing.

Any decisions made by you, or by any organisation, agency or person who has read, received or been provided with information contained in the report ("you" or "the Recipient") are decisions of the Recipient and we will not make, or be deemed to make, any decisions on behalf of any Recipient. We will not be liable for the consequences of any such decisions.

Current regulations and good practice were used in the preparation of this report. An appropriately qualified person must review the recommendations given in this report at the time of preparation of the scheme design to ensure that any recommendations given remain valid in light of changes in regulation and practice, or additional information obtained regarding the site.

Any Recipient must take into account any other factors apart from the Report of which they and their experts and advisers are or should be aware. The information, data, conclusions, opinions and judgements set out in the report may relate to certain contexts and may not be suitable in other contexts. It is your responsibility to ensure that you do not use the information we provide in the wrong context.

This report is based on readily available geological records, the recorded physical investigation, the strata observed in the works, together with the results of completed site and laboratory tests. Whilst skill and care has been taken to interpret these conditions likely between or below investigation points, the possibility of other characteristics not revealed cannot be discounted, for which no liability can be accepted. The impact of our assessment on other aspects of the development required evaluation by other involved parties.

The opinions expressed cannot be absolute due to the limitations of time and resources within the context of the agreed brief and the possibility of unrecorded previous in ground activities. The ground conditions have been sampled or monitored in recorded locations and tests for some of the more common chemicals generally expected. Other concentrations of types of chemicals may exist. It was not part of the scope of this report to comment on environment/contaminated land considerations.

The conclusions and recommendations relate to 157 Milton Road, Cowplain, Hampshire, PO8 8RE.

Trial hole is a generic term used to describe a method of direct investigation. The term trial pit, borehole or window sampler borehole implies the specific technique used to produce a trial hole.

The depth to roots and/or of desiccation may vary from that found during the investigation. The client is responsible for establishing the depth to roots and/or of desiccation on a plot-by-plot basis prior to the construction of foundations. Where trees are mentioned in the text this means existing trees, recently removed trees (approximately 15 years to full recovery on cohesive soils) and those planned as part of the site landscaping.

Ownership of copyright of all printed material including reports, laboratory test results, trial pit and borehole log sheets, including drillers log sheets, remain with Ground and Water Limited. Licence is for the sole use of the client and may not be assigned, transferred or given to a third party.

Only our client may rely on this report and should this report or any information contained in it be provided to any third party we accept no responsibility to the third party for the contents of this report save to the extent expressly outlined by us in writing in a reliance letter addressed from us to the third party.

Recipients are not permitted to publish this report outside of their organisation without our express written consent.

APPENDIX B
Photoplate

Photograph 1: View of tank excavation, looking south-west.



Photograph 2: View of tank excavation, looking south-east.



Project:
157 Milton Road, Cowplain, Hampshire PO8 8RE

Client:
PD Scammell Ltd.

Date:
July 2018

Appendix B: Site Photographs

Ref:
GWPR2677

Plate 1:

ground&water

Photograph 3: View of the tanks that had been excavated from the ground, located in the north-west of the site. View looking north.



Photograph 4: Inspection of tank, filled with foam.



Project: 157 Milton Road, Cowplain, Hampshire PO8 8RE		Plate 2: 
Client: PD Scammell Ltd.	Date: July 2018	
Appendix B: Site Photographs	Ref: GWPR2677	

Photograph 5: Depth of the pit at the north-eastern extent (0.78m).



Photograph 6: Depth of pit at the south-eastern extent (0.78m).



Project: 157 Milton Road, Cowplain, Hampshire PO8 8RE		Plate 3: ground&water
Client: PD Scammell Ltd.	Date: July 2018	
Appendix B: Site Photographs	Ref: GWPR2677	

Photograph 7: Depth of the pit at the south-western extent (1.20m).



Photograph 8: Depth of the pit at the western extent (1.20m).



Project: 157 Milton Road, Cowplain, Hampshire PO8 8RE

Client: PD Scammell Ltd.

Date: July 2018

Appendix B: Site Photographs

Ref: GWPR2677

Plate 4:

ground&water

Photograph 9: Depth of the pit at the north-western extent (1.00m).



Project:
157 Milton Road, Cowplain, Hampshire PO8 8RE

Client:
PD Scammell Ltd

Date:
July 2018

Appendix B: Site Photographs

Ref:
GWPR2677

Plate 5:

ground&water

APPENDIX C
Trial Hole Logs

Percussion Drilling Log

Project Name: 157 Milton Road		Client: PD Scammell Limited		Date: 25/06/2018	
Location: Cowplain, Hampshire PO8 8RE		Contractor:			
Project No. : GWPR2677		Crew Name:		Drilling Equipment:	
Borehole Number WS1	Hole Type WS	Level	Logged By JH	Scale 1:50	Page Number Sheet 1 of 1

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		0.30	D		0.35			MADE GROUND: Grey sandy gravel. Sand is fine to coarse grained. Gravel is abundant, fine to medium, sub-angular to sub-rounded flint, brick and concrete.	1
		0.50	D		0.70			MADE GROUND: Sub-base red gravelly sand. Sand is fine to coarse grained. Gravel is occasional to abundant, sub-angular to sub-rounded flint, brick and concrete.	
		0.80	D		1.00			MADE GROUND: Dark brown red grey sandy gravel. Sand is fine to coarse grained. Gravel is abundant, fine to medium, sub-angular to sub-rounded flint, brick, concrete and carbonaceous material.	
		1.50	D		2.00			HEAD DEPOSITS: Brown gravelly sand. Sand is fine to coarse grained. Gravel is abundant, fine to coarse, sub-angular to sub-rounded flint.	
								End of Borehole at 2.000m	
									2
									3
									4
									5
									6
									7
									8
									9
									10

Hole Diameter		Casing Diameter		Chiselling				Inclination and Orientation			
Depth Base	Diameter	Depth Base	Diameter	Depth Top	Depth Base	Duration	Tool	Depth Top	Depth Base	Inclination	Orientation

Remarks
No groundwater encountered. No roots noted. Hydrocarbon odour at 0.70m bgl.


Percussion Drilling Log

Project Name: 157 Milton Road		Client: PD Scammell Limited		Date: 25/06/2018	
Location: Cowplain, Hampshire PO8 8RE		Contractor:			
Project No. : GWPR2677		Crew Name:		Drilling Equipment:	
Borehole Number WS2	Hole Type WS	Level	Logged By JH	Scale 1:50	Page Number Sheet 1 of 1

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description			
		Depth (m)	Type	Results							
		0.30	D		0.25			MADE GROUND: Grey gravelly sand. Sand is fine to coarse grained. Gravel is abundant, fine to medium, sub-angular to sub-rounded flint and brick.	1		
		0.50	D								
		0.80	D								
		1.50	D				1.40			HEAD DEPOSITS: Brown silty sandy gravelly CLAY. Sand is fine to medium grained. Gravel is abundant, fine to medium, angular to sub-rounded flint.	2
		2.00	D								
		2.50	D				2.42			HEAD DEPOSITS: Brown grey sandy silty gravelly CLAY. Sand is fine grained. Gravel is rare to occasional, sub-rounded flint.	3
		3.00	D				3.00			End of Borehole at 3.000m	

Percussion Drilling Log

Project Name: 157 Milton Road		Client: PD Scammell Limited		Date: 25/06/2018	
Location: Cowplain, Hampshire PO8 8RE		Contractor:			
Project No. : GWPR2677		Crew Name:		Drilling Equipment:	
Borehole Number WS3	Hole Type WS	Level	Logged By JH	Scale 1:50	Page Number Sheet 1 of 1





Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		0.05			0.05			MADE GROUND: Concrete	
		0.30	D					MADE GROUND: Brown grey gravelly sand. Sand is fine to coarse grained. Gravel is occasional to abundant, fine to cobbles, sub-angular to sub-rounded flint, brick and concrete.	
		0.50	D		0.55			MADE GROUND: Brown/red sandy gravelly clay. Sand is fine to coarse grained. Gravel is abundant, fine to coarse, sub-angular to sub-rounded flint.	
		0.80	D		1.00			MADE GROUND: Grey clayey gravelly sand. Sand is fine to coarse grained. Gravel is occasional to abundant, fine to medium, sub-angular to sub-rounded flint. Becoming dark brown/black with carbonaceous material and concrete.	
		1.30	D					HEAD DEPOSITS: Brown red sandy silty gravelly CLAY. Sand is fine to medium grained. Gravel is abundant, fine to medium, angular to sub-rounded flint.	
		1.50	D		1.60			LAMBETH GROUP: Brown grey silty CLAY.	
		1.90	D		1.80				
		2.50	D						
		3.00	D		3.00			End of Borehole at 3.000m	

Hole Diameter		Casing Diameter		Chiselling				Inclination and Orientation			
Depth Base	Diameter	Depth Base	Diameter	Depth Top	Depth Base	Duration	Tool	Depth Top	Depth Base	Inclination	Orientation

Remarks
No groundwater encountered. Roots noted to 0.60m bgl. Hydrocarbon odour noted between GL - 1.00m bgl.

Percussion Drilling Log

Project Name: 157 Milton Road		Client: PD Scammell Limited		Date: 25/06/2018	
Location: Cowplain, Hampshire PO8 8RE		Contractor:			
Project No. : GWPR2677		Crew Name:		Drilling Equipment:	
Borehole Number WS4	Hole Type WS	Level	Logged By JH	Scale 1:50	Page Number Sheet 1 of 1

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		0.30	D		0.70			MADE GROUND: Brown gravelly sand. Sand is fine to coarse grained. Gravel is occasional, fine to medium, sub-angular to sub-rounded flint, brick and concrete. Slightly clayey at 0.50m bgl becoming black carbonaceous material 0.60 - 0.70m bgl.	1
		0.50	D						
		0.80	D						
		1.00	D						
		1.30	D		1.40			MADE GROUND: Dark brown clayey sandy gravel. Sand is fine to coarse grained. Gravel is abundant, fine to coarse, sub-angular to sub-rounded brick and concrete.	2
		1.80	D						
		2.30	D						
		2.80	D						
		3.00			MADE GROUND: Dark brown sandy clayey gravel. Sand is fine to coarse grained. Gravel is occasional to abundant, fine to coarse, sub-angular to sub-rounded brick and concrete.				
					MADE GROUND: Dark brown sandy gravelly clay. Sand is fine to coarse grained. Gravel is abundant, fine to medium, sub-angular to sub-rounded flint and brick.				
					HEAD DEPOSITS: Brown grey/red silty CLAY.				
							End of Borehole at 3.000m	3	
								4	
								5	
								6	
								7	
								8	
								9	
								10	

Percussion Drilling Log

Project Name: 157 Milton Road		Client: PD Scammell Limited		Date: 25/06/2018	
Location: Cowplain, Hampshire PO8 8RE		Contractor:			
Project No. : GWPR2677		Crew Name:		Drilling Equipment:	
Borehole Number WS5	Hole Type WS	Level	Logged By JH	Scale 1:50	Page Number Sheet 1 of 1

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
								VOID	
		1.00	D		1.00				1
		1.30	D						
		1.50	D						
		1.80	D						
					2.10				2
		2.30	D						
		2.50	D						
		2.80	D						
					3.00				3
								End of Borehole at 3.000m	
									4
									5
									6
									7
									8
									9
									10

Hole Diameter		Casing Diameter		Chiselling				Inclination and Orientation			
Depth Base	Diameter	Depth Base	Diameter	Depth Top	Depth Base	Duration	Tool	Depth Top	Depth Base	Inclination	Orientation

Remarks
No groundwater encountered. Roots noted to 2.00m bgl. Hydrocarbon odour noted between 1.00 - 3.00m bgl. Borehole from base of pit at 1.00m bgl.

APPENDIX D
Chemical Laboratory Test Results



James Harvey
Ground & Water Ltd
2 The Long Barn
Norton Farm
Selborne Road
Alton
Hampshire
GU34 3NB

DETS Ltd
Unit 1
Rose Lane Industrial Estate
Rose Lane
Lenham Heath
Kent
ME17 2JN
t: 01622 850410
russell.jarvis@qlsenvironmental.com

DETS Report No: 18-77588

Site Reference: 157 Milton Road

Project / Job Ref: GWPR2677

Order No: None Supplied

Sample Receipt Date: 28/06/2018

Sample Scheduled Date: 28/06/2018

Report Issue Number: 1

Reporting Date: 05/07/2018

Authorised by:



Russell Jarvis
Associate Director of Client Services

Authorised by:



Dave Ashworth
Deputy Quality Manager



DETS Ltd
Unit 1, Rose Lane Industrial Estate
Rose Lane
Lenham Heath
Maidstone
Kent ME17 2JN
Tel : 01622 850410



Soil Analysis Certificate - TPH CWG Banded

DETS Report No: 18-77588	Date Sampled	25/06/18	25/06/18	25/06/18	25/06/18	25/06/18
Ground & Water Ltd	Time Sampled	None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Site Reference: 157 Milton Road	TP / BH No	WS1	WS2	WS3	WS4	WS4
Project / Job Ref: GWPR2677	Additional Refs	None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Order No: None Supplied	Depth (m)	0.80	0.50	1.30	1.80	2.80
Reporting Date: 05/07/2018	QTSE Sample No	343788	343789	343790	343791	343792

Determinand	Unit	RL	Accreditation					
Aliphatic >C5 - C6	mg/kg	< 0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Aliphatic >C6 - C8	mg/kg	< 0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Aliphatic >C8 - C10	mg/kg	< 2	MCERTS	< 2	< 2	< 2	< 2	< 2
Aliphatic >C10 - C12	mg/kg	< 2	MCERTS	< 2	< 2	< 2	< 2	< 2
Aliphatic >C12 - C16	mg/kg	< 3	MCERTS	< 3	< 3	< 3	< 3	< 3
Aliphatic >C16 - C21	mg/kg	< 3	MCERTS	< 3	< 3	< 3	< 3	< 3
Aliphatic >C21 - C34	mg/kg	< 10	MCERTS	< 10	< 10	< 10	< 10	< 10
Aliphatic (C5 - C34)	mg/kg	< 21	NONE	< 21	< 21	< 21	< 21	< 21
Aromatic >C5 - C7	mg/kg	< 0.01	NONE	< 0.01	< 0.01	< 0.01	< 0.01	< 0.01
Aromatic >C7 - C8	mg/kg	< 0.05	NONE	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Aromatic >C8 - C10	mg/kg	< 2	MCERTS	< 2	< 2	< 2	< 2	< 2
Aromatic >C10 - C12	mg/kg	< 2	MCERTS	< 2	< 2	< 2	< 2	< 2
Aromatic >C12 - C16	mg/kg	< 2	MCERTS	< 2	< 2	< 2	< 2	< 2
Aromatic >C16 - C21	mg/kg	< 3	MCERTS	< 3	< 3	< 3	< 3	< 3
Aromatic >C21 - C35	mg/kg	< 10	MCERTS	< 10	< 10	< 10	< 10	< 10
Aromatic (C5 - C35)	mg/kg	< 21	NONE	< 21	< 21	< 21	< 21	< 21
Total >C5 - C35	mg/kg	< 42	NONE	< 42	< 42	< 42	< 42	< 42

Analytical results are expressed on a dry weight basis where samples are assisted-dried at less than 30°C.



DETS Ltd
Unit 1, Rose Lane Industrial Estate
Rose Lane
Lenham Heath
Maidstone
Kent ME17 2JN
Tel : 01622 850410



Soil Analysis Certificate - TPH CWG Banded

DETS Report No: 18-77588	Date Sampled	25/06/18	25/06/18			
Ground & Water Ltd	Time Sampled	None Supplied	None Supplied			
Site Reference: 157 Milton Road	TP / BH No	W55	W55			
Project / Job Ref: GWPR2677	Additional Refs	None Supplied	None Supplied			
Order No: None Supplied	Depth (m)	2.30	2.80			
Reporting Date: 05/07/2018	QTSE Sample No	343793	343794			

Determinand	Unit	RL	Accreditation					
Aliphatic >C5 - C6	mg/kg	< 0.01	NONE	0.05	0.07			
Aliphatic >C6 - C8	mg/kg	< 0.05	NONE	0.74	1.01			
Aliphatic >C8 - C10	mg/kg	< 2	MCERTS	6	4			
Aliphatic >C10 - C12	mg/kg	< 2	MCERTS	6	5			
Aliphatic >C12 - C16	mg/kg	< 3	MCERTS	< 3	< 3			
Aliphatic >C16 - C21	mg/kg	< 3	MCERTS	< 3	< 3			
Aliphatic >C21 - C34	mg/kg	< 10	MCERTS	< 10	< 10			
Aliphatic (C5 - C34)	mg/kg	< 21	NONE	< 21	< 21			
Aromatic >C5 - C7	mg/kg	< 0.01	NONE	< 0.01	< 0.01			
Aromatic >C7 - C8	mg/kg	< 0.05	NONE	0.18	0.22			
Aromatic >C8 - C10	mg/kg	< 2	MCERTS	10	11			
Aromatic >C10 - C12	mg/kg	< 2	MCERTS	10	12			
Aromatic >C12 - C16	mg/kg	< 2	MCERTS	4	7			
Aromatic >C16 - C21	mg/kg	< 3	MCERTS	< 3	4			
Aromatic >C21 - C35	mg/kg	< 10	MCERTS	< 10	< 10			
Aromatic (C5 - C35)	mg/kg	< 21	NONE	24	35			
Total >C5 - C35	mg/kg	< 42	NONE	< 42	45			

Analytical results are expressed on a dry weight basis where samples are assisted-dried at less than 30°C.



DETS Ltd
Unit 1, Rose Lane Industrial Estate
Rose Lane
Lenham Heath
Maidstone
Kent ME17 2JN
Tel : 01622 850410



Soil Analysis Certificate - BTEX / MTBE

DETS Report No: 18-77588	Date Sampled	25/06/18	25/06/18	25/06/18	25/06/18	25/06/18
Ground & Water Ltd	Time Sampled	None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Site Reference: 157 Milton Road	TP / BH No	WS1	WS2	WS3	WS4	WS4
Project / Job Ref: GWPR2677	Additional Refs	None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Order No: None Supplied	Depth (m)	0.80	0.50	1.30	1.80	2.80
Reporting Date: 05/07/2018	QTSE Sample No	343788	343789	343790	343791	343792

Determinand	Unit	RL	Accreditation					
Benzene	ug/kg	< 2	MCERTS	< 2	< 2	< 2	< 2	< 2
Toluene	ug/kg	< 5	MCERTS	8	< 5	< 5	< 5	< 5
Ethylbenzene	ug/kg	< 2	MCERTS	< 2	10	< 2	< 2	< 2
p & m-xylene	ug/kg	< 2	MCERTS	< 2	168	< 2	38	< 2
o-xylene	ug/kg	< 2	MCERTS	< 2	124	< 2	66	< 2
MTBE	ug/kg	< 5	MCERTS	< 5	< 5	< 5	< 5	< 5

Analytical results are expressed on a dry weight basis where samples are assisted-dried at less than 30°C



DETS Ltd
Unit 1, Rose Lane Industrial Estate
Rose Lane
Lenham Heath
Maidstone
Kent ME17 2JN
Tel : 01622 850410



Soil Analysis Certificate - BTEX / MTBE

DETS Report No: 18-77588	Date Sampled	25/06/18	25/06/18			
Ground & Water Ltd	Time Sampled	None Supplied	None Supplied			
Site Reference: 157 Milton Road	TP / BH No	W55	W55			
Project / Job Ref: GWPR2677	Additional Refs	None Supplied	None Supplied			
Order No: None Supplied	Depth (m)	2.30	2.80			
Reporting Date: 05/07/2018	QTSE Sample No	343793	343794			

Determinand	Unit	RL	Accreditation			
Benzene	ug/kg	< 2	MCERTS	< 2	< 2	
Toluene	ug/kg	< 5	MCERTS	180	222	
Ethylbenzene	ug/kg	< 2	MCERTS	235	175	
p & m-xylene	ug/kg	< 2	MCERTS	560	968	
o-xylene	ug/kg	< 2	MCERTS	303	481	
MTBE	ug/kg	< 5	MCERTS	< 5	< 5	

Analytical results are expressed on a dry weight basis where samples are assisted-dried at less than 30°C



DETS Ltd
Unit 1, Rose Lane Industrial Estate
Rose Lane
Lenham Heath
Maidstone
Kent ME17 2JN
Tel : 01622 850410

Leachate Analysis Certificate - EPH Texas Banded						
DETS Report No: 18-77588	Date Sampled	25/06/18	25/06/18	25/06/18	25/06/18	25/06/18
Ground & Water Ltd	Time Sampled	None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Site Reference: 157 Milton Road	TP / BH No	WS1	WS2	WS3	WS4	WS4
Project / Job Ref: GWPR2677	Additional Refs	None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Order No: None Supplied	Depth (m)	0.80	0.50	1.30	1.80	2.80
Reporting Date: 05/07/2018	QTSE Sample No	343795	343796	343797	343798	343799

Determinand	Unit	RL	Accreditation						
EPH Texas (C6 - C8)	ug/l	< 10	NONE	< 10	< 10	< 10	< 10	< 10	< 10
EPH Texas (>C8 - C10)	ug/l	< 10	NONE	< 10	19	< 10	< 10	< 10	< 10
EPH Texas (>C10 - C12)	ug/l	< 10	NONE	< 10	17	< 10	< 10	< 10	< 10
EPH Texas (>C12 - C16)	ug/l	< 10	NONE	< 10	< 10	< 10	< 10	< 10	< 10
EPH Texas (>C16 - C21)	ug/l	< 10	NONE	< 10	< 10	< 10	< 10	< 10	< 10
EPH Texas (>C21 - C40)	ug/l	< 10	NONE	< 10	< 10	< 10	< 10	< 10	< 10
EPH Texas (C6 - C40)	ug/l	< 10	NONE	< 10	35	< 10	< 10	< 10	< 10



DETS Ltd
Unit 1, Rose Lane Industrial Estate
Rose Lane
Lenham Heath
Maidstone
Kent ME17 2JN
Tel : 01622 850410

Leachate Analysis Certificate - EPH Texas Banded					
DETS Report No: 18-77588	Date Sampled	25/06/18	25/06/18		
Ground & Water Ltd	Time Sampled	None Supplied	None Supplied		
Site Reference: 157 Milton Road	TP / BH No	WS5	WS5		
Project / Job Ref: GWPR2677	Additional Refs	None Supplied	None Supplied		
Order No: None Supplied	Depth (m)	2.30	2.80		
Reporting Date: 05/07/2018	QTSE Sample No	343800	343801		

Determinand	Unit	RL	Accreditation				
EPH Texas (C6 - C8)	ug/l	< 10	NONE	< 10	16		
EPH Texas (>C8 - C10)	ug/l	< 10	NONE	103	71		
EPH Texas (>C10 - C12)	ug/l	< 10	NONE	67	45		
EPH Texas (>C12 - C16)	ug/l	< 10	NONE	21	19		
EPH Texas (>C16 - C21)	ug/l	< 10	NONE	21	18		
EPH Texas (>C21 - C40)	ug/l	< 10	NONE	< 10	< 10		
EPH Texas (C6 - C40)	ug/l	< 10	NONE	212	169		



DETS Ltd
Unit 1, Rose Lane Industrial Estate
Rose Lane
Lenham Heath
Maidstone
Kent ME17 2JN
Tel : 01622 850410



Soil Analysis Certificate - Sample Descriptions

DETS Report No: 18-77588	
Ground & Water Ltd	
Site Reference: 157 Milton Road	
Project / Job Ref: GWPR2677	
Order No: None Supplied	
Reporting Date: 05/07/2018	

QTSE Sample No	TP / BH No	Additional Refs	Depth (m)	Moisture Content (%)	Sample Matrix Description
343788	WS1	None Supplied	0.80	10.8	Brown sandy gravel with brick and concrete
343789	WS2	None Supplied	0.50	10.3	Brown sandy clay with brick and concrete
343790	WS3	None Supplied	1.30	6.9	Brown sandy clay with stones and concrete
343791	WS4	None Supplied	1.80	14.1	Brown sandy clay with brick and concrete
343792	WS4	None Supplied	2.80	15.4	Brown clay
343793	WS5	None Supplied	2.30	10	Brown sandy clay with stones
343794	WS5	None Supplied	2.80	9.6	Brown sandy gravel with stones

Moisture content is part of procedure E003 & is not an accredited test

Insufficient Sample ^{1/5}

Unsuitable Sample ^{1/5}



DETS Ltd
Unit 1, Rose Lane Industrial Estate
Rose Lane
Lenham Heath
Maidstone
Kent ME17 2JN
Tel : 01622 850410



Soil Analysis Certificate - Methodology & Miscellaneous Information

DETS Report No: 18-77588

Ground & Water Ltd

Site Reference: 157 Milton Road

Project / Job Ref: GWPR2677

Order No: None Supplied

Reporting Date: 05/07/2018

Matrix	Analysed On	Determinand	Brief Method Description	Method No
Soil	D	Boron - Water Soluble	Determination of water soluble boron in soil by 2:1 hot water extract followed by ICP-OES	E012
Soil	AR	BTEX	Determination of BTEX by headspace GC-MS	E001
Soil	D	Cations	Determination of cations in soil by aqua-regia digestion followed by ICP-OES	E002
Soil	D	Chloride - Water Soluble (2:1)	Determination of chloride by extraction with water & analysed by ion chromatography	E009
Soil	AR	Chromium - Hexavalent	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1.5 diethylenetriamine followed by colorimetry	E016
Soil	AR	Cyanide - Complex	Determination of complex cyanide by distillation followed by colorimetry	E015
Soil	AR	Cyanide - Free	Determination of free cyanide by distillation followed by colorimetry	E015
Soil	AR	Cyanide - Total	Determination of total cyanide by distillation followed by colorimetry	E015
Soil	D	Cyclohexane Extractable Matter (CEM)	Gravimetrically determined through extraction with cyclohexane	E011
Soil	AR	Diesel Range Organics (C10 - C24)	Determination of hexane/acetone extractable hydrocarbons by GC-FID	E004
Soil	AR	Electrical Conductivity	Determination of electrical conductivity by addition of saturated calcium sulphate followed by electrometric measurement	E022
Soil	AR	Electrical Conductivity	Determination of electrical conductivity by addition of water followed by electrometric measurement	E023
Soil	D	Elemental Sulphur	Determination of elemental sulphur by solvent extraction followed by GC-MS	E020
Soil	AR	EPH (C10 - C40)	Determination of acetone/hexane extractable hydrocarbons by GC-FID	E004
Soil	AR	EPH Product ID	Determination of acetone/hexane extractable hydrocarbons by GC-FID	E004
Soil	AR	EPH TEXAS (C6-C8, C8-C10, C10-C12, C12-C16, C16-C21, C21-C40)	Determination of acetone/hexane extractable hydrocarbons by GC-FID for C8 to C40. C6 to C8 by headspace GC-MS	E004
Soil	D	Fluoride - Water Soluble	Determination of Fluoride by extraction with water & analysed by ion chromatography	E009
Soil	D	FOC (Fraction Organic Carbon)	Determination of fraction of organic carbon by oxidising with potassium dichromate followed by titration with iron (II) sulphate	E010
Soil	D	Loss on Ignition @ 450°C	Determination of loss on ignition in soil by gravimetrically with the sample being ignited in a muffle furnace	E019
Soil	D	Magnesium - Water Soluble	Determination of water soluble magnesium by extraction with water followed by ICP-OES	E025
Soil	D	Metals	Determination of metals by aqua-regia digestion followed by ICP-OES	E002
Soil	AR	Mineral Oil (C10 - C40)	Determination of hexane/acetone extractable hydrocarbons by GC-FID fractionating with SPE cartridge	E004
Soil	AR	Moisture Content	Moisture content; determined gravimetrically	E003
Soil	D	Nitrate - Water Soluble (2:1)	Determination of nitrate by extraction with water & analysed by ion chromatography	E009
Soil	D	Organic Matter	Determination of organic matter by oxidising with potassium dichromate followed by titration with iron (II) sulphate	E010
Soil	AR	PAH - Speciated (EPA 16)	Determination of PAH compounds by extraction in acetone and hexane followed by GC-MS with the use of surrogate and internal standards	E005
Soil	AR	PCB - 7 Congeners	Determination of PCB by extraction with acetone and hexane followed by GC-MS	E008
Soil	D	Petroleum Ether Extract (PEE)	Gravimetrically determined through extraction with petroleum ether	E011
Soil	AR	pH	Determination of pH by addition of water followed by electrometric measurement	E007
Soil	AR	Phenols - Total (monohydric)	Determination of phenols by distillation followed by colorimetry	E021
Soil	D	Phosphate - Water Soluble (2:1)	Determination of phosphate by extraction with water & analysed by ion chromatography	E009
Soil	D	Sulphate (as SO4) - Total	Determination of total sulphate by extraction with 10% HCl followed by ICP-OES	E013
Soil	D	Sulphate (as SO4) - Water Soluble (2:1)	Determination of sulphate by extraction with water & analysed by ion chromatography	E009
Soil	D	Sulphate (as SO4) - Water Soluble (2:1)	Determination of water soluble sulphate by extraction with water followed by ICP-OES	E014
Soil	AR	Sulphide	Determination of sulphide by distillation followed by colorimetry	E018
Soil	D	Sulphur - Total	Determination of total sulphur by extraction with aqua-regia followed by ICP-OES	E024
Soil	AR	SVOC	Determination of semi-volatile organic compounds by extraction in acetone and hexane followed by GC-MS	E006
Soil	AR	Thiocyanate (as SCN)	Determination of thiocyanate by extraction in caustic soda followed by acidification followed by addition of ferric nitrate followed by colorimetry	E017
Soil	D	Toluene Extractable Matter (TEM)	Gravimetrically determined through extraction with toluene	E011
Soil	D	Total Organic Carbon (TOC)	Determination of organic matter by oxidising with potassium dichromate followed by titration with iron (II) sulphate	E010
Soil	AR	TPH CWG (ali: C5- C6, C6-C8, C8-C10, C10-C12, C12-C16, C16-C21, C21-C34, aro: C5-C7, C7-C8, C8-C10, C10-C12, C12-C16, C16-C21, C21-C35)	Determination of hexane/acetone extractable hydrocarbons by GC-FID fractionating with SPE cartridge for C8 to C35. C5 to C8 by headspace GC-MS	E004
Soil	AR	TPH LQM (ali: C5-C6, C6-C8, C8-C10, C10-C12, C12-C16, C16-C35, C35-C44, aro: C5-C7, C7-C8, C8-C10, C10-C12, C12-C16, C16-C21, C21-C35, C35-C44)	Determination of hexane/acetone extractable hydrocarbons by GC-FID fractionating with SPE cartridge for C8 to C44. C5 to C8 by headspace GC-MS	E004
Soil	AR	VOCs	Determination of volatile organic compounds by headspace GC-MS	E001
Soil	AR	VPH (C6-C8 & C8-C10)	Determination of hydrocarbons C6-C8 by headspace GC-MS & C8-C10 by GC-FID	E001

D Dried
AR As Received

Soil Analysis Certificate - Methodology & Miscellaneous Information
DETS Report No: 18-77588
Ground & Water Ltd
Site Reference: 157 Milton Road
Project / Job Ref: GWPR2677
Order No: None Supplied
Reporting Date: 05/07/2018

Matrix	Analysed On	Determinand	Brief Method Description	Method No
Water	UF	Alkalinity	Determination of alkalinity by titration against hydrochloric acid using bromocresol green as the end point	E103
Water	UF	BTEX	Determination of BTEX by headspace GC-MS	E101
Water	F	Cations	Determination of cations by filtration followed by ICP-MS	E102
Water	UF	Chemical Oxygen Demand (COD)	Determination using a COD reactor followed by colorimetry	E112
Water	F	Chloride	Determination of chloride by filtration & analysed by ion chromatography	E109
Water	F	Chromium - Hexavalent	Determination of hexavalent chromium by acidification, addition of 1,5 diphenylcarbazide followed by	E116
Water	UF	Cyanide - Complex	Determination of complex cyanide by distillation followed by colorimetry	E115
Water	UF	Cyanide - Free	Determination of free cyanide by distillation followed by colorimetry	E115
Water	UF	Cyanide - Total	Determination of total cyanide by distillation followed by colorimetry	E115
Water	UF	Cyclohexane Extractable Matter (CEM)	Gravimetrically determined through liquid:liquid extraction with cyclohexane	E111
Water	F	Diesel Range Organics (C10 - C24)	Determination of liquid:liquid extraction with hexane followed by GC-FID	E104
Water	F	Dissolved Organic Content (DOC)	Determination of DOC by filtration followed by low heat with persulphate addition followed by IR detection	E110
Water	UF	Electrical Conductivity	Determination of electrical conductivity by electrometric measurement	E123
Water	F	EPH (C10 - C40)	Determination of liquid:liquid extraction with hexane followed by GC-FID	E104
Water	F	EPH TEXAS (C6-C8, C8-C10, C10-C12, C12-C16, C16-C21, C21-C40)	Determination of liquid:liquid extraction with hexane followed by GC-FID for C8 to C40. C6 to C8 by headspace GC-MS	E104
Water	F	Fluoride	Determination of Fluoride by filtration & analysed by ion chromatography	E109
Water	F	Hardness	Determination of Ca and Mg by ICP-MS followed by calculation	E102
Leachate	F	Leachate Preparation - NRA	Based on National Rivers Authority leaching test 1994	E301
Leachate	F	Leachate Preparation - WAC	Based on BS EN 12457 Pt1, 2, 3	E302
Water	F	Metals	Determination of metals by filtration followed by ICP-MS	E102
Water	F	Mineral Oil (C10 - C40)	Determination of liquid:liquid extraction with hexane followed by GC-FID	E104
Water	F	Nitrate	Determination of nitrate by filtration & analysed by ion chromatography	E109
Water	UF	Monohydric Phenol	Determination of phenols by distillation followed by colorimetry	E121
Water	F	PAH - Speciated (EPA 16)	Determination of PAH compounds by concentration through SPE cartridge, collection in dichloromethane followed by GC-MS	E105
Water	F	PCB - 7 Congeners	Determination of PCB compounds by concentration through SPE cartridge, collection in dichloromethane followed by GC-MS	E108
Water	UF	Petroleum Ether Extract (PEE)	Gravimetrically determined through liquid:liquid extraction with petroleum ether	E111
Water	UF	pH	Determination of pH by electrometric measurement	E107
Water	F	Phosphate	Determination of phosphate by filtration & analysed by ion chromatography	E109
Water	UF	Redox Potential	Determination of redox potential by electrometric measurement	E113
Water	F	Sulphate (as SO ₄)	Determination of sulphate by filtration & analysed by ion chromatography	E109
Water	UF	Sulphide	Determination of sulphide by distillation followed by colorimetry	E118
Water	F	SVOC	Determination of semi-volatile organic compounds by concentration through SPE cartridge, collection in dichloromethane followed by GC-MS	E106
Water	UF	Toluene Extractable Matter (TEM)	Gravimetrically determined through liquid:liquid extraction with toluene	E111
Water	UF	Total Organic Carbon (TOC)	Low heat with persulphate addition followed by IR detection	E110
Water	F	TPH CWG (ali: C5-C6, C6-C8, C8-C10, C10-C12, C12-C16, C16-C21, C21-C34, aro: C5-C7, C7-C8, C8-C10, C10-C12, C12-C16, C16-C21, C21-C35)	Determination of liquid:liquid extraction with hexane, fractionating with SPE followed by GC-FID for C8 to C35. C5 to C8 by headspace GC-MS	E104
Water	F	TPH LQM (ali: C5-C6, C6-C8, C8-C10, C10-C12, C12-C16, C16-C35, C35-C44, aro: C5-C7, C7-C8, C8-C10, C10-C12, C12-C16, C16-C21, C21-C35, C35-C44)	Determination of liquid:liquid extraction with hexane, fractionating with SPE followed by GC-FID for C8 to C44. C5 to C8 by headspace GC-MS	E104
Water	UF	VOCs	Determination of volatile organic compounds by headspace GC-MS	E101
Water	UF	VPH (C6-C8 & C8-C10)	Determination of hydrocarbons C6-C8 by headspace GC-MS & C8-C10 by GC-FID	E101

Key

F Filtered
UF Unfiltered

APPENDIX E
Soil Assessment Criteria

Appendix E

Soil Guideline Values and General Assessment Criteria

E1 Assessment Criteria

The Contaminated Land Regime reflects the UK Government's stated objectives of achieving sustainable development through the 'suitable for use approach'.

E1.1 Contaminated Land Exposure Assessment Model (CLEA)

Current United Kingdom risk assessment practice is based on the Contaminated Land Exposure Assessment Model (CLEA).

The CLEA Guidance comprises the following documents:

- 1) EA Science Report SC050021/SR2: *Human health toxicological assessment of contaminants in soil.*
- 2) EA Science Report SC050021/SR3: *Updated technical background to the CLEA model.*
- 3) EA CLEA Bulletin (2009).
- 4) CLEA software version 1.06 (2009)
- 5) Toxicological reports and SGV technical notes.

The CLEA guidance and tools:

- *do not cover other types of risk to humans, such as fire, suffocation or explosion, or short-term and acute exposures.*
- *do not cover risks to the environment, such as groundwater, ecosystems or buildings.*
- *do not provide a definitive test for telling when human health risks are significant.*
- *are not a legal requirement in assessing land contamination risks. They are not part of the legal regime for Part 2A of the Environmental Protection Act 1990.*

The CLEA guidance derives soil concentrations of contaminants above which (in the opinion of the EA) there may be a concern that warrants further investigation. It does not provide a definitive test for establishing that the risk is significant.

E1.2 Land-use Scenarios

The CLEA model uses a range of standard land-use scenarios to develop conceptual exposure models as follows:

1 Residential (with home grown produce) (RwHP)

Generic scenario assumes a typical two-storey house built on a ground bearing slab with a private garden having a lawn, flowerbeds and a small fruit and vegetable patch.

- Critical receptor is a young female child (zero to six years old)
- Exposure duration is six years.
- Exposure pathways include direct soil and indoor dust ingestion, consumption of homegrown produce and any adhering soil, skin contact with soils and indoor dust and inhalation of indoor and outdoor dust and vapours.
- Building type is a two-storey small terraced house.

A sub-set of this land-use is residential apartments with communal landscaped gardens where the consumption of home grown vegetables will not occur. (Residential without homegrown produce (RwoHP)).

2) **Allotments**

Provision of open space (about 250sq.m) commonly made available to tenants by the local authority to grow fruit and vegetable for their own consumption. Typically, there are a number of plots to a site which may have a total area of up to 1 hectare. The tenants are assumed to be adults and that young children make occasional accompanied visits.

Although some allotment holders may choose to keep animals including rabbits, hens, and ducks, potential exposure to contaminated meat and eggs is not considered.

- Critical receptor is a young female child (zero to six years old)
- Exposure duration is six years.
- Exposure pathways include direct soil ingestion, consumption of homegrown produce and any adhering soil, skin contact with soils and inhalation of outdoor dust and vapours.
- There is no building.

3) **Commercial/Industrial**

The generic scenario assumes a typical commercial or light industrial property comprising a three-storey building at which employees spend most time indoors and are involved in office-based or relatively light physical work.

- Critical receptor is a working female adult (aged 16 to 65 years old).
- Exposure duration is a working lifetime of 49 years.
- Exposure pathways include direct soil and indoor dust ingestion, skin contact with soils and dusts and inhalation of dust and vapours.
- Building type is a three-storey office (pre 1970).

E1.4 **LQM/CIEH SUITABLE 4 USE LEVELS (S4UL)**

For derivation of these S4UL reference must be made to:

Nathanial, P., McCaffrey, C., Gillet, A., Ogden, R., Nathanial, J., *The LQM/CIEH S4UL's for Human Health Risk Assessment*. Land Quality Press. 2015

The LQM/CIEH S4UL for a given land use is the concentration of the contaminant in soil at which the predicted daily exposure, as calculated by the CLEA software, equals the Health Criteria Value.

The final output for each contaminant represents a synthesis of new toxicological (and fate and transport) reviews published since the preparation of the 2nd edition LQM/CIEH GAC's (Nathanial et al., 2009).

In the derivation of LQM/CIEH S4UL's the principles of 'minimal' or 'tolerable' risk enshrined in SR2, which has not been withdrawn, has been maintained.

S4UL's have been derived for the basic CLEA land-uses, as described above, and for two new land uses:

- Public Open Spaces near Residential Housing (POSresi)
- Public Park (POSpark).

Public Open Spaces near Residential Housing (POSresi)

Includes the predominantly grassed areas adjacent to high density housing, the central green area on many 1930's – 1970's housing estates, and smaller areas commonly incorporated in newer developments as informal grassed areas or more formal landscaped areas with a mixture of open space and covered soils with planting. It is assumed that the close proximity to the place of residence will allow tracking back of soil to occur.

Public Park (POSpark)

An area of open space, usually owned and maintained by the local authority, provided for recreational uses including family visits and picnics, children's play area, informal sporting activities (not a dedicated sports pitch), and dog walking. It is assumed that tracking back of soils into places of residence will be negligible.

The following LQM/CIEH S4ULs (Copyright Land Quality Management Limited) have been reproduced with permission, to the publication number S4UL3072

E1.5 Category 4 Screening Levels (C4SLs)

In the case of Lead, no SGV or GAC has been published to date. This is likely to be due to the toxicity review that is currently being undertaken by the Environment Agency. In the absence of updated toxicity information the SGV derived using CLEA 1.06 methodology and related toxicity will be used.

The overall objective of the C4SLs research project was to assist the provision of technical guidance in support of Defra's revised Statutory Guidance (SG) for Part 2A of the Environmental Protection Act 1990 (Part 2A) (Defra, 2012a). Specifically, the project aimed to deliver:

- A methodology for deriving C4SLs for four generic land-uses comprising residential, commercial, allotments and public open space; and
- A demonstration of the methodology, via the derivation of C4SLs for six substances – arsenic, benzene, benzo(a)pyrene, cadmium, chromium (VI) and lead.

To help achieve a more targeted approach to identifying and managing contaminated land in relation to the risk (or possibility) of harm to human health, the revised SG presented a new four category system for considering land under Part 2A, ranging from Category 4, where there is no risk that land poses a significant possibility of significant harm (SPOSH), or the level of risk is low, to Category 1, where the risk that land poses a significant possibility of significant harm (SPOSH) is unacceptably high. More specific guidance on what type of land should be considered as Category 4 (Human Health) is provided in Paragraphs 4.21 and 4.22 of the revised SG, as follows:

“4.21 The local authority should consider that the following types of land should be placed into Category 4: Human Health:

(a) Land where no relevant contaminant linkage has been established.

(b) Land where there are only normal levels of contaminants in soil, as explained in Section 3 of this Guidance.

(c) Land that has been excluded from the need for further inspection and assessment because contaminant levels do not exceed relevant generic assessment criteria in accordance with Section 3 of this Guidance, or relevant technical tools or advice that may be developed in accordance with paragraph 3.30 of this Guidance.

(d) Land where estimated levels of exposure to contaminants in soil are likely to form only a small proportion of what a receptor might be exposed to anyway through other sources of environmental exposure (e.g. in relation to average estimated national levels of exposure to substances commonly found in the environment, to which receptors are likely to be exposed in the normal course of their lives).

4.22 The local authority may consider that land other than the types described in paragraph 4.21 should be placed into Category 4: Human Health if following a detailed quantitative risk assessment it is satisfied that the level of risk posed is sufficiently low.”

The C4SLs are intended as “relevant technical tools” (in relation to Paragraph 4.21(c)) to help local authorities and others when deciding to stop further assessment of a site, on the grounds that it falls within Category 4 (Human Health).

The Impact Assessment (IA), which accompanied the revised SG (Defra, 2012b) provides further information on the nature and potential role of the C4SLs. Paragraph 47(h) of the IA states that:

“The new statutory guidance will bring about a situation where the current SGVs/GACs are replaced with more pragmatic (but still strongly precautionary) Category 4 screening levels (C4SLs) which will provide a higher simple test for deciding that land is suitable for use and definitely not contaminated land.”

A key distinction between the Soil Guideline Values (SGVs) and the C4SLs is the level of risk that they describe. As described by the Environment Agency (2009a):
“SGVs are guidelines on the level of long-term human exposure to individual chemicals in soil that, unless stated otherwise, are tolerable or pose a minimal risk to human health.”

The implication of Paragraph 47(h) of the IA is that minimal risk is well within Category 4 and that the C4SLs should describe a higher level of risk which, whilst not minimal, can still be considered low enough to allow a judgement to be made that land containing substances at, or below, the C4SLs would typically fall within Category 4. This reflects Paragraph 4.20 of the revised SG, which states:

"4.20 The local authority should not assume that land poses a significant possibility of significant harm if it considers that there is no risk or that the level of risk posed is low. For the purposes of this Guidance, such land is referred to as a "Category 4: Human Health" case. The authority may decide that the land is a Category 4: Human Health case as soon as it considers it has evidence to this effect, and this may happen at any stage during risk assessment including the early stages."

C4SLs, therefore, should not be viewed as "SPOSH levels" and they should not be used as a legal trigger for the determination of land under Part 2A.

The generic screening values referred to before usually take the form of risk-based Soil Guideline Values (SGVs) or other Generic Assessment Criteria (GACs) that are most typically derived using the Environment Agency's Contaminated Land Exposure Assessment (CLEA) model, as described in the Environment Agency's SR2, SR3 and SR7 reports (EA, 2009b & c; EA, 2008). It is anticipated that C4SLs will be used in a similar manner; as generic screening criteria that can be used within a GQRA, albeit describing a higher level of risk than the SGVs.

The suggested approach to the development of C4SLs consists of the retention and use of the CLEA framework, modified according to considerations of the underlying science within the context of Defra's policy objectives relating to the revised SG. Within this context, it is suggested that the development of C4SLs may be achieved in one of three ways, namely:

- By modifying the toxicological parameters used within CLEA (while maintaining current exposure parameters);
- By modifying the exposure parameters embedded within CLEA (while maintaining current toxicological "minimal risk" interpretations); and
- By modifying both toxicological and exposure parameters.

There is also a suggested check on "other considerations" (e.g., background levels, epidemiological data, sources of uncertainty) within the approach, applicable to all three options.

It is suggested that a new term is defined for the toxicological guidance values associated with the derivation of C4SLs – a Low Level of Toxicological Concern (LLTC). A LLTC should represent an intake of low concern that remains suitably protective of health, and definitely does not approach an intake level that could be defined as SPOSH.

E1.6 CL:AIRE Generic Assessment Criteria (GAC)

For derivation of the CL:AIRE Generic Assessment Criteria (GAC) reference should be made to the following report:

CL:AIRE, *The Soil Generic Assessment Criteria for Human Health Risk Assessment. Contaminated Land: Applications in the Real Environment*. 2009.

Within this report CL:AIRE provided Generic Assessment Criteria (GAC's) in accordance with the CLEA software and the principles outlined above for a further 35 contaminants sometime encountered on land affected by contamination.

E1.7 Detailed Quantitative Risk Assessments (DQRA)

Where the adoption of an S4UL/GAC/C4SL is not appropriate, for instance when the intended land-use is at variance the CLEA standard land-uses then a DQRA may be undertaken to develop site specific values for relevant soil contaminants.

⇒ Establishing the plausibility that generic exposure pathways exist in practice by measurement and observation.

⇒ Developing more accurate parameters using site data.

E1.8 Phytotoxicity

CLEA guidance only addresses human health toxicity; assessment of plant toxicity (phytotoxicity) is based on threshold trigger values obtained from the following source:

- ICRL 70/90: *Notes on the restoration and aftercare of metalliferous mining sites for pasture and grazing*.

E1.8 Statistical Tests

DEFRA R&D Publication CLR 7 (DOE 1994) addressed the statistical treatment of test results and their comparison to Soil Guideline Values.

Consideration must be given to the appropriate area of land to be considered termed the critical averaging area.

For a communal open space or commercial land-use, the critical averaging area will depend on the proposed layout. For a residential use with private gardens the averaging area is the individual plot.

It may be appropriate to compare the upper 95th percentile concentration with the Soil Guideline Value, subject to applying a statistical test to establish that the range of concentrations are reasonably consistent and belonging to the same underlying distribution of data.

The DEFRA discussion paper *Assessing risks from land contamination – a proportionate approach ('the way forward')* (CLAN06/2006) aimed to increase understanding of the role that statistics can play in quantifying the uncertainty attached to the estimates of the mean concentration of contaminants in soil. In direct response CL:AIRE/CIEH published a joint report, *Guidance in comparing soil contamination data with a critical concentration* (CL:AIRE/CIEH 2008). A software implementation of the statistical techniques given in the report was published by ESI International (2008).

Treatment of Hot-Spots

- ⇒ A statistical test is applied to establish whether the data is a part of a single set, or whether data outliers are present.
- ⇒ Provided that the data is based on random sampling and no distinct contamination source was present at the sampling location, the hot-spot(s) may be excluded and the mean of the remaining data assessed.

E2 Ground and Water Limited Soil Assessment Criteria

The Soil Assessment Criteria used in the preparation of this report are tabulated in the following pages:

C4SL Low Level of Toxicological Concern

C4SL Low Level of Toxicological Concern						
Contaminant	RwHP (mg/kg)	RwoHP (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)	POSresi (mg/kg)	POSpark (mg/kg)
Lead	<210	<330	<84	<6000	<760	<1400

Phytotoxicity Recommendations

ICRCL 70/90 *Restoration of metalliferous mining areas*

Phytotoxicity (Harmful to Plants) Threshold Trigger Values	
Copper	250mg/kg
Zinc	1000mg/kg
Notes: Many cultivars and specifically grasses have a high tolerance and there will be no ill-effect at the threshold trigger values given for neutral or near neutral pH. Site observation of plant vitality may give additional guidance.	

Cont'd Overleaf:

Cont'd from previous page:
LQM CIEH Suitable 4 Use Levels (S4UL's)

LQM/CIEH Suitable 4 Use Levels – Metals and Semi-metals						
Contaminant	RwHP (mg/kg)	RwoHP (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)	POSresi (mg/kg)	POSpark (mg/kg)
<i>Metals:</i>						
Arsenic	37	40	43	640	79	170
Beryllium	1.7	1.7	35	12	2.2	63
Boron	290	11000	45	240000	21000	46000
Cadmium	11	85	1.9	190	120	532
Chromium (III)	910	910	18000	8600	1500	33000
Chromium (VI)	6	6	1.8	33	7.7	20
Copper	2400	7100	520	68000	12000	44000
Elemental Mercury	1.2	1.2	21	58	16	30
Inorganic Mercury	40	56	19	1100	120	240
Methylmercury	11	15	6	320	40	68
Nickel	180	180	230	980	230	3400
Selenium	250	430	88	12000	1100	1800
Vanadium	410	1200	91	9000	2000	5000
Zinc	3700	40000	620	730000	81000	170000

LQM/CIEH Suitable 4 Use Levels – BTEX Compounds							
Contaminant	Soil Organic Matter	RwHP (mg/kg)	RwoHP (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)	POSresi (mg/kg)	POSpark (mg/kg)
Benzene	1.0% SOM	0.087	0.38	0.017	27	72	90
	2.5% SOM	0.170	0.70	0.034	47	72	100
	6.0% SOM	0.370	1.40	0.075	90	73	110
Toluene	1.0% SOM	130	880	22	56000	56000	87000
	2.5% SOM	290	1900	51	110000	56000	95000
	6.0% SOM	660	3900	120	180000	56000	100000
Ethylbenzene	1.0% SOM	47	83	16	5700	24000	17000
	2.5% SOM	110	190	39	13000	24000	22000
	6.0% SOM	260	440	91	27000	25000	27000
o-Xylene	1.0% SOM	60	88	28	6600	41000	17000
	2.5% SOM	140	210	67	15000	42000	24000
	6.0% SOM	330	480	160	33000	43000	33000
m-Xylene	1.0% SOM	59	82	31	6200	41000	17000
	2.5% SOM	140	190	74	14000	42000	24000
	6.0% SOM	320	450	170	31000	43000	33000
p-Xylene	1.0% SOM	56	79	29	5900	41000	17000
	2.5% SOM	130	180	69	14000	42000	23000
	6.0% SOM	310	430	160	30000	43000	31000
The most health protective value in each scenario for Xylene is highlighted in bold.							

Cont'd Overleaf:

Cont'd from previous page:

LQM/CIEH Suitable 4 Use Levels For TPH							
Aliphatic		RwHP (mg/kg)	RwoHP (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)	POSresi (mg/kg)	POSpark (mg/kg)
EC 5-6	1.0% SOM	42	42	730	3,200 (304) ^{sol}	570,000 (304) ^{sol}	95,000 (304) ^{sol}
	2.5% SOM	78	78	1,700	5,900 (558) ^{sol}	590,000	130,000 (558) ^{sol}
	6.0% SOM	160	160	3,900	12,000 (1150) ^{sol}	600,000 ^l	180,000 (1150) ^{sol}
EC >6-8	1.0% SOM	100	100	2,300	7,800 (144) ^{sol}	600,000	150,000 (144) ^{sol}
	2.5% SOM	230	230	5,600	17,000 (322) ^{sol}	610,000	220,000 (322) ^{sol}
	6.0% SOM	530	530	13,000	40,000 (736) ^{sol}	620,000	320,000 (736) ^{sol}
EC >8-10	1.0% SOM	27	27	320	2,000 (78) ^{sol}	13,000	14,000 (78) ^{sol}
	2.5% SOM	65	65	770	4,800 (118) ^{vap}	13,000	18,000 (118) ^{vap}
	6.0% SOM	150	150	1,700	11,000 (451) ^{vap}	13,000	21,000 (451) ^{vap}
EC >10-12	1.0% SOM	130 (48) ^{vap}	130 (48) ^{vap}	2,200	9,700 (48) ^{sol}	13,000	21,000 (48) ^{sol}
	2.5% SOM	330 (118) ^{vap}	330 (118) ^{vap}	4,400	23,000 (118) ^{vap}	13,000	23,000 (118) ^{vap}
	6.0% SOM	760 (283) ^{vap}	770 (283) ^{vap}	7,300	47,000 (283) ^{vap}	13,000	24,000 (283) ^{vap}
EC >12-16	1.0% SOM	1,100 (24) ^{sol}	1,100 (24) ^{sol}	11,000	59,000 (24) ^{sol}	13,000	25,000 (24) ^{sol}
	2.5% SOM	2,400 (59) ^{sol}	2,400 (59) ^{sol}	13,000	82,000 (59) ^{sol}	13,000	25,000 (59) ^{sol}
	6.0% SOM	4,300 (142) ^{sol}	4,400 (142) ^{sol}	13,000	90,000 (142) ^{sol}	13,000	26,000 (142) ^{sol}
EC >16-35	1.0% SOM	65,000 (8.48) ^{sol}	65,000 (8.48) ^{sol}	260,000	1,600,000	250,000	450,000
	2.5% SOM	92,000 (21) ^{sol}	92,000 (21) ^{sol}	270,000	1,700,000	250,000	480,000
	6.0% SOM	110,000	110,000	270,000	1,800,000	250,000	490,000
EC >35-44	1.0% SOM	65,000 (8.48) ^{sol}	65,000 (8.48) ^{sol}	260,000	1,600,000	250,000	450,000
	2.5% SOM	92,000 (21) ^{sol}	92,000 (21) ^{sol}	270,000	1,700,000	250,000	480,000
	6.0% SOM	110,000	110,000	270,000	1,800,000	250,000	490,000

Cont'd Overleaf:

Cont'd from previous page:

LQM/CIEH Suitable 4 Use Levels For TPH							
Aromatic		RwHP (mg/kg)	RwoHP (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)	POSresi (mg/kg)	POSpark (mg/kg)
EC 5-7 (Benzene)	1.0% SOM	70	370	13	26,000 (1220) ^{sol}	56,000	76,000 (1220) ^{sol}
	2.5% SOM	140	690	27	46,000 (2260) ^{sol}	56,000	84,000 (2260) ^{sol}
	6.0% SOM	300	1,400	57	86,000 (4710) ^{sol}	56,000	92,000 (4710) ^{sol}
EC >7-8 (Toluene)	1.0% SOM	130	860	22	56,000 (869) ^{vap}	56,000	87,000 (869) ^{sol}
	2.5% SOM	290	1,800	51	110,000 (1920) ^{sol}	56,000	95,000 (1920) ^{sol}
	6.0% SOM	660	3,900	120	180,000 (4360) ^{vap}	56,000	100,000 (4360) ^{vap}
EC >8-10	1.0% SOM	34	47	8.6	3,500 (613) ^{vap}	5,000	7,200 (613) ^{vap}
	2.5% SOM	83	110	21	8,100 (1500) ^{vap}	5,000	8,500 (1500) ^{vap}
	6.0% SOM	190	270	51	17,000 (3850) ^{vap}	5,000	9,300 (3580) ^{vap}
EC >10-12	1.0% SOM	74	250	13	16,000 (364) ^{sol}	5,000	9,200 (364) ^{sol}
	2.5% SOM	180	590	31	28,000 (899) ^{sol}	5,000	9,700 (889) ^{sol}
	6.0% SOM	380	1,200	74	34,000 (2150) ^{sol}	5,000	10,000
EC >12-16	1.0% SOM	140	1,800	23	36,000 (169) ^{sol}	5,100	10,000
	2.5% SOM	330	2,300 (419) ^{sol}	57	37,000	5,100	10,000
	6.0% SOM	660	2,500	130	38,000	5,000	10,000
EC >16-21	1.0% SOM	260	1,900	46	28,000	3,800	7,600
	2.5% SOM	540	1,900	110	28,000	3,800	7,700
	6.0% SOM	930	1,900	260	28,000	3,800	7,800
EC >21-35	1.0% SOM	1,100	1,900	370	28,000	3,800	7,800
	2.5% SOM	1,500	1,900	820	28,000	3,800	7,800
	6.0% SOM	1,700	1,900	1,600	28,000	3,800	7,900
EC >35-44	1.0% SOM	1,100	1,900	370	28,000	3,800	7,800
	2.5% SOM	1,500	1,900	820	28,000	3,800	7,800
	6.0% SOM	1,700	1,900	1,600	28,000	3,800	7,900
EC >44-70	1.0% SOM	1,600	1,900	1,200	28,000	3,800	7,800
	2.5% SOM	1,800	1,900	2,100	28,000	3,800	7,800
	6.0% SOM	1,900	1,900	3,000	28,000	3,800	7,900

SOM = Soil Organic Matter Content (%)

Cont'd Overleaf:

Cont'd from previous page:

LQM/CIEH Suitable 4 Use Levels For Polycyclic Aromatic Hydrocarbons (PAH's)

Determinants		RwHP (mg/kg)	RwoHP (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)	POSresi (mg/kg)	POSpark (mg/kg)
Acenaphthene	1.0% SOM	210	3,000 (57.0) ^{sol}	34	84,000(57.0) ^{sol}	15,000	29,000
	2.5% SOM	510	4,700(141) ^{sol}	85	97,000(141) ^{sol}	15,000	30,000
	6.0% SOM	1100	6,000(336) ^{sol}	200	100,000	15,000	30,000
Acenaphthylene	1.0% SOM	170	2,900(86.1) ^{sol}	28	83,000(86.1) ^{sol}	15,000	29,000
	2.5% SOM	420	4,600(212) ^{sol}	69	97,000(212) ^{sol}	15,000	30,000
	6.0% SOM	920	6,000(506) ^{sol}	160	100,000	15,000	30,000
Anthracene	1.0% SOM	2,400	31,000(1.17) ^{vap}	380	520,000	74,000	150,000
	2.5% SOM	5,400	35,000	950	540,000	74,000	150,000
	6.0% SOM	11,000	37,000	2,200	540,000	74,000	150,000
Benzo(a)anthracene	1.0% SOM	7.20	11	2.90	170	29	49
	2.5% SOM	11	14	6.50	170	29	56
	6.0% SOM	13	15	13	180	29	62
Benzo(a)pyrene	1.0% SOM	2.20	3.20	0.97	35	5.70	11
	2.5% SOM	2.70	3.20	2.00	35	5.70	12
	6.0% SOM	3.00	3.20	3.50	36	5.70	13
Benzo(b)fluoranthene	1.0% SOM	2.60	3.90	0.99	44	7.10	13
	2.5% SOM	3.30	4.00	2.10	44	7.20	15
	6.0% SOM	3.70	4.00	3.90	45	7.20	16
Benzo(ghi)perylene	1.0% SOM	320	360	290	3,900	640	1,400
	2.5% SOM	340	360	470	4,000	640	1,500
	6.0% SOM	350	360	640	4,000	640	1,600
Benzo(k)fluoranthene	1.0% SOM	77	110	37	1,200	190	370
	2.5% SOM	93	110	75	1,200	190	410
	6.0% SOM	100	110	130	1,200	190	440
Chrysene	1.0% SOM	15	30	4.10	350	57	93
	2.5% SOM	22	31	9.40	350	57	110
	6.0% SOM	27	32	19	350	57	120
Dibenzo(ah)anthracene	1.0% SOM	0.24	0.31	0.14	3.50	0.57	1.10
	2.5% SOM	0.28	0.32	0.27	3.60	0.57	1.30
	6.0% SOM	0.30	0.32	0.43	3.60	0.58	1.40

Cont'd Overleaf:

Cont'd from previous page:

LQM/CIEH Suitable 4 Use Levels For Polycyclic Aromatic Hydrocarbons (PAH's)							
Determinants		RwHP (mg/kg)	RwoHP (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)	POSresi (mg/kg)	POSpark (mg/kg)
Flouranthene	1.0% SOM	280	1,500	52	2,3000	3,100	6,300
	2.5% SOM	560	1,600	130	2,3000	3,100	6,300
	6.0% SOM	890	1,600	290	2,3000	3,100	6,300
Flourene	1.0% SOM	170	2,800 (30.9) ^{sol}	27	63,000(30.9) ^{sol}	9,900	20,000
	2.5% SOM	400	3,800(76.5) ^{sol}	67	68,000	9,900	20,000
	6.0% SOM	860	4,500(183) ^{sol}	160	71,000	9,900	20,000
Indeno(123-cd)pyrene	1.0% SOM	27	45	9.50	500	82	150
	2.5% SOM	36	46	21	510	82	170
	6.0% SOM	41	46	39	510	82	180
Napthalene	1.0% SOM	2.30	2.6	4.10	190 ^f (76.4) ^{sol}	4,900 ^f	1,200 ^f (76.4) ^{sol}
	2.5% SOM	5.60	5.6	10	460 ^f (183) ^{sol}	4,900 ^f	1,900 ^f (183) ^{sol}
	6.0% SOM	13	13	24	1,100 ^f (432) ^{sol}	4,900 ^f	3,000
Phenanthrene	1.0% SOM	95	1,300(183) ^{sol}	18	22,000	3,100	6,200
	2.5% SOM	220	1,500	38	22,000	3,100	6,200
	6.0% SOM	440	1,500	90	23,000	3,100	6,300
Pyrene	1.0% SOM	620	3,700	110	54,000	7,400	15,000
	2.5% SOM	1200	3,800	270	54,000	7,400	15,000
	6.0% SOM	2000	3,800	620	54,000	7,400	15,000
Coal Tar (Benzo(a)pyrene used as marker compound)	1.0% SOM	0.79	1.2	0.32	15	2.20	4.40
	2.5% SOM	0.98	1.2	0.67	15	2.20	4.70
	6.0% SOM	1.10	1.2	1.20	15	2.20	4.80

^{vap} – GAC presented exceeds the vapour saturation limit, which is presented in brackets.

^{sol} – GAC presented exceeds the soil saturation limit, which is presented in brackets.

Cont'd Overleaf:

Cont'd from previous page:
LQM/CIEH Sutable 4 Use Levels (cont.)

LQM CIEH General Assessment Criteria: Volatile and Semi-Volatile Organic Compounds						
Contaminant	RwHP (mg/kg)	RwoHP (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)	POSresi (mg/kg)	POSpark (mg/kg)
Chloroalkanes & alkenes						
1,2 Dichloroethane						
1.0% SOM	0.0071	0.0092	0.0046	0.67	29	21
2.5% SOM	0.011	0.013	0.0083	0.97	29	24
6.0% SOM	0.019	0.023	0.016	1.70	29	28
1,1,2,2 Tetrachloroethane						
1.0% SOM	1.60	3.90	0.41	270	1,400	1,800
2.5% SOM	3.40	8.00	0.89	550	1,400	2,100
6.0% SOM	7.50	17	2.00	1,100	1,400	2,300
1,1,1,2 Tetrachloroethane						
1.0% SOM	1.20	1.50	0.79	110	1,400	1,500
2.5% SOM	2.80	3.50	1.90	250	1,400	1,800
6.0% SOM	6.40	8.20	4.40	560	1,400	2,100
Tetrachloroethene						
1.0% SOM	0.18	0.18	0.65	19	1,400	810 ^{sol} (424)
2.5% SOM	0.39	0.40	1.50	42	1,400	1,100 ^{sol} (951)
6.0% SOM	0.90	0.92	3.60	95	1,400	1,500
1,1,1 Trichloroethane						
1.0% SOM	8.80	9.00	48	660	140,000	57,000 ^{vap} (1425)
2.5% SOM	18	18	110	1,300	140,000	76,000 ^{vap} (2915)
6.0% SOM	39	40	240	3,000	140,000	100,000 ^{vap} (6392)
Tetrachloromethene						
1.0% SOM	0.026	0.026	0.45	2.90	890	190
2.5% SOM	0.056	0.056	1.00	6.30	920	270
6.0% SOM	0.130	0.130	2.40	14	950	400
Trichloroethene						
1.0% SOM	0.016	0.017	0.041	1.20	120	70
2.5% SOM	0.034	0.036	0.091	2.60	120	91
6.0% SOM	0.075	0.080	0.210	5.70	120	120
Trichloromethane						
1.0% SOM	0.91	1.20	0.42	99	2,500	2,600
2.5% SOM	1.70	2.10	0.83	170	2,500	2,800
6.0% SOM	3.40	4.20	1.70	350	2,500	3,100
Vinyl Chloride						
1.0% SOM	0.00064	0.00077	0.00055	0.059	3.50	4.80
2.5% SOM	0.00087	0.00100	0.00100	0.077	3.50	5.00
6.0% SOM	0.00014	0.00150	0.00180	0.120	3.50	5.40

Cont'd Overleaf:

Cont'd from previous page:

LQM CIEH General Assessment Criteria: Volatile and Semi-Volatile Organic Compounds						
Contaminant	RwHP (mg/kg)	RwoHP (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)	POSresi (mg/kg)	POSpark (mg/kg)
Explosives						
2,4,6 Trinitrotoluene						
1.0% SOM	1.60	65	0.24	1,000	130	260
2.5% SOM	3.70	66	0.58	1,000	130	270
6.0% SOM	8.10	66	1.40	1,000	130	270
RDX (Hexogen/Cyclonite/1,3,5- trinitro-1,3,5- triazacyclohexane)						
1.0% SOM	120	13,000	17	210,000	26,000	49,000(18.7) ^{sol}
2.5% SOM	250	13,000	38	210,000	26,000	51,000
6.0% SOM	540	13,000	85	210,000	27,000	53,000
HMX (Octogen/1,3,5,7- tetrenitro-1,3,5,7- tetrazacyclo-octane)						
1.0% SOM	5.70	67,00	0.86	110,000	13,000	23,000(0.35) ^{vap}
2.5% SOM	13	67,00	1.90	110,000	13,000	23,000(0.39) ^{vap}
6.0% SOM	26	67,00	3.90	110,000	13,000	24,000(0.48) ^{vap}
Atrazine						
1.0% SOM	3.30	610	0.50	9,300	1,200	2,300
2.5% SOM	7.60	620	1.20	9,400	1,200	2,400
6.0% SOM	17.40	620	2.70	9,400	1,200	2,400
Pesticides						
Aldrin						
1.0% SOM	5.70	7.30	3.20	170	18	30
2.5% SOM	6.60	7.40	6.10	170	18	31
6.0% SOM	7.10	7.50	9.60	170	18	31
Dieldrin						
1.0% SOM	0.97	7.00	0.17	170	18	30
2.5% SOM	2.00	7.30	0.41	170	18	30
6.0% SOM	3.50	7.40	0.96	170	18	31
Dichlorvos						
1.0% SOM	0.032	6.40	0.0049	140	16	26
2.5% SOM	0.066	6.50	0.0100	140	16	26
6.0% SOM	0.140	6.60	0.0220	140	16	27
Alpha - Endosulfan						
1.0% SOM	7.40	160(0.003) ^{vap}	1.20	5,600(0.003) ^{vap}	1,200	2,400
2.5% SOM	18	280(0.007) ^{vap}	2.90	7,400(0.007) ^{vap}	1,200	2,400
6.0% SOM	41	410(0.016) ^{vap}	6.80	8,400(0.016) ^{vap}	1,200	2,400

Cont'd Overleaf:

Cont'd from previous page:

LQM CIEH General Assessment Criteria: Volatile and Semi-Volatile Organic Compounds						
Contaminant	RwHP (mg/kg)	RwoHP (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)	POSresi (mg/kg)	POSpark (mg/kg)
Pesticides						
Beta - Endosulfan						
1.0% SOM	7.00	190(0.00007) ^{vap}	1.10	6,300(0.00007) ^{vap}	1,200	2,400
2.5% SOM	17	320(0.0002) ^{vap}	2.70	7,800(0.0002) ^{vap}	1,200	2,400
6.0% SOM	39	440(0.0004) ^{vap}	6.40	8700	1,200	2,500
Alpha - Hexachlorocyclohexanes						
1.0% SOM	0.23	6.90	0.035	170	24	47
2.5% SOM	0.55	9.20	0.087	180	24	48
6.0% SOM	1.20	11	0.210	180	24	48
Beta - Hexachlorocyclohexanes						
1.0% SOM	0.085	3.70	0.013	65	8.10	15
2.5% SOM	0.200	3.80	0.032	65	8.10	15
6.0% SOM	0.460	3.80	0.077	65	8.10	16
Gamma - Hexachlorocyclohexanes						
1.0% SOM	0.06	2.90	0.0092	67	8.2	14
2.5% SOM	0.14	3.30	0.0230	69	8.2	15
6.0% SOM	0.33	3.50	0.0540	70	8.2	15
Chlorobenzenes						
Chlorobenzene						
1.0% SOM	0.46	0.46	5.90	56	11,000	1,300(675) ^{sol}
2.5% SOM	1.00	1.00	14	130	13,000	2,000(1520) ^{sol}
6.0% SOM	2.40	2.40	32	290	14,000	2,900
1,2-Dichlorobenzene						
1.0% SOM	23	24	94	2,000 (571) ^{sol}	90,000	24,000(571) ^{sol}
2.5% SOM	55	57	230	4,800 (1370) ^{sol}	95,000	36,000(1370) ^{sol}
6.0% SOM	130	130	540	11,000 (3240) ^{sol}	98,000	51,000(3240) ^{sol}
1,3-Dichlorobenzene						
1.0% SOM	0.40	0.44	0.25	30	300	390
2.5% SOM	1.00	1.10	0.60	73	300	440
6.0% SOM	2.30	2.50	1.50	170	300	470
1,4-Dichlorobenzene						
1.0% SOM	61	61	15	4,400 (224) ^{vap}	17,000 ^g	36,000 (224) ^{vap}
2.5% SOM	150	150	37	10,000 (540) ^{vap}	17,000 ^g	36,000 (540) ^{vap}
6.0% SOM	350	350	88 ^g	25,000 (1280) ^{vap}	17,000 ^g	36,000 (1280) ^{vap}
1,2,3,-Trichlorobenzene						
1.0% SOM	1.50	1.50	4.70	102	1,800	770(134) ^{vap}
2.5% SOM	3.60	3.70	12	250	1,800	1,100(330) ^{vap}
6.0% SOM	8.60	8.80	28	590	1,800	1,600(789) ^{vap}

Cont'd Overleaf:

**LQM CIEH General Assessment Criteria:
Volatile and Semi-Volatile Organic Compounds**

Contaminant	RwHP (mg/kg)	RwoHP (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)	POSresi (mg/kg)	POSpark (mg/kg)
Chlorobenzenes						
1,2,3,- Trichlorobenzene						
1.0% SOM	1.50	1.50	4.70	102	1,800	770(134) ^{vap}
2.5% SOM	3.60	3.70	12	250	1,800	1,100(330) ^{vap}
6.0% SOM	8.60	8.80	28	590	1,800	1,600(789) ^{vap}
1,2,4,- Trichlorobenzene						
1.0% SOM	2.60	2.60	55	220	15,000	1,700(318) ^{vap}
2.5% SOM	6.40	6.40	140	530	17,000	2,600(786) ^{vap}
6.0% SOM	15	15	320	1,300	19,000	4,000(1880) ^{vap}
1,3,5,- Trichlorobenzene						
1.0% SOM	0.33	0.33	4.70	23	1,700	380(36.7) ^{vap}
2.5% SOM	0.81	0.81	12	55	1,700	590(90.8) ^{vap}
6.0% SOM	1.90	1.90	140	130	1,800	860(217) ^{vap}
1,2,3,4,- Tetrachlorobenzene						
1.0% SOM	15	24	4.40	1,700(122) ^{vap}	830	1,500(122) ^{vap}
2.5% SOM	36	56	11	3,080(304) ^{vap}	830	1,600
6.0% SOM	78	120	26	4,400(728) ^{vap}	830	1,600
1,2,3,5,- Tetrachlorobenzene						
1.0% SOM	0.66	0.75	0.38	49(39.4) ^{vap}	78	110(39) ^{vap}
2.5% SOM	1.60	1.90	0.90	120(98.1) ^{vap}	79	120
6.0% SOM	3.70	4.30	2.20	240(235) ^{vap}	79	130
1,2,4, 5,- Tetrachlorobenzene						
1.0% SOM	0.33	0.73	0.06	42(19.7) ^{sol}	13	25
2.5% SOM	0.77	1.70	0.16	72(49.1) ^{sol}	13	26
6.0% SOM	1.60	3.50	0.37	96	13	26
Pentachlorobenzene						
1.0% SOM	5.80	19	1.20	640(43.0) ^{sol}	100	190
2.5% SOM	12	30	3.10	770(107) ^{sol}	100	190
6.0% SOM	22	38	7.00	830	100	190
Hexachlorobenzene						
1.0% SOM	1.80(0.20) ^{vap}	4.10 (0.20) ^{vap}	0.47	110(0.20) ^{vap}	16	30
2.5% SOM	3.30(0.50) ^{vap}	5.70 (0.50) ^{vap}	1.10	120	16	30
6.0% SOM	4.90	6.70 (1.2) ^{vap}	2.50	120	16	30

Cont'd Overleaf:

**LQM CIEH General Assessment Criteria:
Volatile and Semi-Volatile Organic Compounds**

Contaminant	RwHP (mg/kg)	RwoHP (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)	POSresi (mg/kg)	POSpark (mg/kg)
Phenols & Chlorophenols						
Phenols						
1.0% SOM	280	750	66	760 ^{dir} (31,000)	760 ^{dir} (11,000)	760 ^{dir} (8,600)
2.5% SOM	550	1,300	140	1,500 ^{dir} (35,000)	1,500 ^{dir} (11,000)	1,500 ^{dir} (9,700)
6.0% SOM	1100	2,300	280	3,200 ^{dir} (37,000)	3,200 ^{dir} (11,000)	3,200 ^{dir} (11,000)
Chlorophenols (4 Congeners)						
1.0% SOM	0.87	94	0.13	3,500	620	1,100
2.5% SOM	2.00	150	0.30	4,000	620	1,100
6.0% SOM	4.50	210	0.70	4,300	620	1,100
Pentachlorophenols						
1.0% SOM	0.22	27(16.4) ^{vap}	0.03	400	60	110
2.5% SOM	0.52	29	0.08	400	60	120
6.0% SOM	1.20	31	0.19	400	60	120
Others						
Carbon Disulphide						
1.0% SOM	0.14	0.14	4.80	11	11,000	1,300
2.5% SOM	0.29	0.29	10	22	11,000	1,900
6.0% SOM	0.62	0.62	23	47	12,000	2,700
Hexachloro-1,3-Butadiene						
1.0% SOM	0.29	0.32	0.25	31	25	48
2.5% SOM	0.70	0.78	0.61	68	25	50
6.0% SOM	1.60	1.80	1.40	120	25	51

Cont'd Overleaf:

Cont'd from previous page:

CL:AIRE Soil Generic Assessment Criteria				
Contaminant	Residential (mg/kg)	Residential without plant uptake (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)
<i>Metals:</i>				
Antimony	ND	550	ND	7500
Barium	ND	1300	ND	22000
Molybdenum	ND	670	ND	17000

ND – Not Derived.
NA – Not Applicable

Cont'd Overleaf:

Cont'd from previous page:

CL:AIRE General Assessment Criteria: Volatile and Semi-Volatile Organic Compounds				
Contaminant	Residential (mg/kg)	Residential without plant uptake (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)
1,1,2 Trichloroethane				
1.0% SOM	0.60	0.88	0.28	94
2.5% SOM	1.20	1.8	0.61	190
6.0% SOM	2.70	3.9	1.40	400
1,1-Dichloroethane				
1.0% SOM	2.40	2.50	9.20	280
2.5% SOM	3.90	4.10	17	450
6.0% SOM	7.40	7.70	35	850
1,1-Dichloroethene				
1.0% SOM	0.23	0.23	2.80	26
2.5% SOM	0.40	0.41	5.60	46
6.0% SOM	0.82	0.82	12	92
1,2,4-Trimethylbenzene				
1.0% SOM	0.35	0.41	0.38	42
2.5% SOM	0.85	0.99	0.93	99
6.0% SOM	2.00	2.30	2.20	220
1,2-Dichloropropane				
1.0% SOM	0.024	0.024	0.62	3.3
2.5% SOM	0.042	0.042	1.20	5.9
6.0% SOM	0.084	0.085	2.60	12
2,4-Dimethylphenol				
1.0% SOM	19	210	3.10	16000*
2.5% SOM	43	410	7.20	24000*
6.0% SOM	97	730	17	30000*
2,4-Dinitrotoluene				
1.0% SOM	1.50	170*	0.22	3700*
2.5% SOM	3.20	170	0.49	3700*
6.0% SOM	7.20	170	1.10	3800*
2,6-Dinitrotoluene				
1.0% SOM	0.78	78	0.12	1900*
2.5% SOM	1.70	84	0.27	1900*
6.0% SOM	3.90	87	0.61	1900*
2-Chloronaphthalene				
1.0% SOM	3.70	3.80	40	390*
2.5% SOM	9.20	9.30	98	960*
6.0% SOM	22	22	230	2200*

Cont'd Overleaf:

Cont'd from previous page:

CL:AIRE General Assessment Criteria: Volatile and Semi-Volatile Organic Compounds				
Contaminant	Residential (mg/kg)	Residential without plant uptake (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)
Biphenyl				
1.0% SOM	66*	220*	14	18000*
2.5% SOM	160	500*	35	33000*
6.0% SOM	360	980*	83	48000*
Bis (2-ethylhexyl) phthalate				
1.0% SOM	280*	2700*	47*	85000*
2.5% SOM	610*	2800*	120*	86000*
6.0% SOM	1100*	2800*	280*	86000*
Bromobenzene				
1.0% SOM	0.87	0.91	3.2	97
2.5% SOM	2.0	2.1	7.6	220
6.0% SOM	4.7	4.9	18	520
Bromodichloromethane				
1.0% SOM	0.016	0.019	0.016	2.1
2.5% SOM	0.030	0.034	0.032	3.7
6.0% SOM	0.061	0.070	0.068	7.6
Bromoform				
1.0% SOM	2.8	5.2	0.95	760
2.5% SOM	5.9	11	2.1	1500
6.0% SOM	13	23	4.6	3100
Butyl benzyl phthalate				
1.0% SOM	1400*	42000*	220*	940000*
2.5% SOM	3300*	44000*	550*	940000*
6.0% SOM	7200*	44000*	1300*	950000*
Chloroethane				
1.0% SOM	8.3	8.4	110	960
2.5% SOM	11	11	200	1300
6.0% SOM	18	18	380	2100
Chloromethane				
1.0% SOM	0.0083	0.0085	0.066	1.0
2.5% SOM	0.0098	0.0099	0.13	1.2
6.0% SOM	0.013	0.013	0.23	1.6
Cis 1,2 Dichloroethene				
1.0% SOM	0.11	0.12	0.26	14
2.5% SOM	0.19	0.20	0.50	24
6.0% SOM	0.37	0.39	1.0	47

Cont'd Overleaf:

Cont'd from previous page:

CL:AIRE General Assessment Criteria: Volatile and Semi-Volatile Organic Compounds				
Contaminant	Residential (mg/kg)	Residential without plant uptake (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)
Dichloromethane				
1.0% SOM	0.58	2.10	0.10	270
2.5% SOM	0.98	2.80	0.19	360
6.0% SOM	1.70	4.50	0.34	560
Diethyl Phthalate				
1.0% SOM	120*	1800*	19*	150000*
2.5% SOM	260*	3500*	41*	220000*
6.0% SOM	570*	6300*	94*	290000*
Di-n-butyl phthalate				
1.0% SOM	13*	450*	2.00	15000*
2.5% SOM	31*	450*	5.00	15000*
6.0% SOM	67*	450*	12	15000*
Di-n-octyl phthalate				
1.0% SOM	2300*	3400*	940*	89000*
2.5% SOM	2800*	3400*	2100*	89000*
6.0% SOM	3100*	3400*	3900*	89000*
Hexachloroethane				
1.0% SOM	0.20	0.22	0.27	22*
2.5% SOM	0.48	0.54	0.67	53*
6.0% SOM	1.10	1.30	1.60	120*
Isopropylbenzene				
1.0% SOM	11	12	32	1400*
2.5% SOM	27	28	79	3300*
6.0% SOM	64	67	190	7700*
Methyl tert-butyl ether				
1.0% SOM	49	73	23	7900
2.5% SOM	84	120	44	13000
6.0% SOM	160	220	90	24000
Propylbenzene				
1.0% SOM	34	40	34	4100*
2.5% SOM	82	97	83	9700*
6.0% SOM	190	230	200	21000*
Styrene				
1.0% SOM	8.10	35	1.60	3300*
2.5% SOM	19	78	3.70	6500*
6.0% SOM	43	170	8.70	11000*

Cont'd Overleaf:

Cont'd from previous page:

CL:AIRE General Assessment Criteria: Volatile and Semi-Volatile Organic Compounds				
Contaminant	Residential (mg/kg)	Residential without plant uptake (mg/kg)	Allotment (mg/kg)	Commercial (mg/kg)
Total Cresols (2-, 3-, and 4-methylphenol)				
1.0% SOM	80	3700	12	160000
2.5% SOM	180	5400	27	180000*
6.0% SOM	400	6900	63	180000*
Trans 1,2 Dichloroethene				
1.0% SOM	0.19	0.19	0.93	22
2.5% SOM	0.34	0.35	1.90	40
6.0% SOM	0.70	0.71	0.24	81
Tributyl tin oxide				
1.0% SOM	0.25	1.40	0.042	130*
2.5% SOM	0.59	3.10	0.100	180*
6.0% SOM	1.30	5.70	0.240	200*

Notes: *Soil concentration above soil saturation limit