



Arboricultural Survey to BS5837:2012

Premier Inn Hotels

Premier Inn Portsmouth (Havant),
65 Bedhampton Hill,
Havant,
PO9 3JN.

07 October 2024

Matthew Middle Dip., (Arb.), Tech.Arbor.A.

Table of Contents

If this report has been released electronically the appendices referred to herein can be found in the annexed zip folder/s as .pdf files. If this report has been released in hard copy the appendices will be bound into the back of this report. Plans are annexed separately as A0, A1, A2 or A3 as appropriate.

1. Introduction	2
2. Survey	2
3. BS5837:2012 Scope	4
4. Methodology.....	4
5. Definitions	6
6. Recommendations	7
7. Limitations	7
8. Appendices	7
Appendix 1: Table 1 Cascade chart for tree quality assessment	8
Appendix 2: Schedule of Trees	10
Appendix 3: Tree Constraints Plan.....	16
9. Document Production Record.....	18

1. Introduction

Arbtech Consulting Limited (Arbtech) received written instruction on 23rd September 2024 from Whitbread Group PLC to attend Premier Inn Portsmouth (Havant), 65 Bedhampton Hill, Havant, PO9 3JN; grid reference, SU 69691 06245 (site) to undertake an arboricultural survey a to BS5837:2012 guidance to assess trees, hedges and major shrub groups growing on and within influencing distance of the site and to produce a Schedule of trees and a Tree Constraints Plan.

I am Matthew Middle, an arboricultural consultant at Arbtech Consulting Ltd. I undertook the tree survey on 3rd October 2024 and subsequently have produced this summary of my findings.

I hold a National Diploma in arboriculture, I also hold the LANTRA Professional Tree Inspector certification and have professional experience in contracting and in arboricultural consultancy spanning more than twenty years.

The advice below and appended is underwritten by our Professional Indemnity insurance for the business practice of Arboricultural Consultancy in the sum of one million Pounds Sterling in each and every claim.

Table 1: Documents referred to.

Document	Reference No.
Survey base drawing	641047/1
British Standard 5837:2012	“BS5837”
Tree Survey Schedule	Arbtech TS 01
Tree Constraints Plan	Arbtech TCP 01

2. Survey

Survey: An arboricultural survey to BS5837 of all trees within impacting distance of the site was undertaken by Matt Middle on 3rd October 2024.

During the survey I categorised the trees using “Table 1 – Cascade chart for tree quality assessment” of the BS5837:2012 (see Appendix 1).

A total of fifteen (15) individual trees and six (6) groups of trees were surveyed. Details for each of the trees surveyed are provided in the Schedule of Trees (see Appendix 2).

Table 2: Documents upon which this tree survey has been based.

Document	Originator	Reference Number	Title
Topo	Midland Surveys LTD	641047/1	Topographical Survey

Limitations: The survey was made at ground level using visual observation only. Detailed examinations, such as climbing inspections and decay detection equipment were not employed, though may form part of the survey's management recommendations. Measurements were taken using specialist tapes, laser and GPS devices. Where this was not possible, measurements are estimated.

Scope: Pre-development tree surveys make arboricultural management recommendations based exclusively upon the individual tree or group of trees condition relative to their present context (*i.e. not in relation to the proposed development*).

Legal Status: No statutory protection check has been performed. BS5837 does not draw any distinction between trees subject to statutory protection, such as a Tree Preservation Order ("TPO"), and those trees without. This is principally because a detailed planning consent overrides any TPO protection. Consequently, we do not seek to offer any comparison between or infer any difference in the quality or importance of TPO trees and other trees.

* For more information on the surveyed trees please see Arbtech Consulting Ltd, Tree Survey Schedule (Appendix 1), Tree Survey Report and Tree Constraints Plan.

Site description

A commercial property situated on Bedhampton Hill adjacent to the Waterlooville Bypass A3(M).

There is circa 15m difference in height between the northern end and southern end of the site.



Figure 1: OS Map (Bing Maps)

This content is for educational and informative purposes; so parts of it are reproduced with the kind permission of BSI Global.

3. BS5837:2012 Scope

This standard recognises that there can be problems for development close to existing trees which are to be retained, and of planting trees close to existing structures. This standard sets out to assist those concerned with trees in relation to construction to form balanced judgements. It does not set out to put arguments for or against development, or for the removal or retention of trees. Where development, including demolition, is to occur, the standard provides guidance on how to decide which trees are appropriate for retention, on the means of protecting these trees during development, including demolition and construction work, and on the means of incorporating trees into the developed landscape.

4. Methodology

The methodology used to assess the trees was the British Standard 5837:2012 ‘Trees in Relation to Construction’ tree survey method. The aim of the survey is to establish which trees are moderate and good quality; suitable for retention and justifying protection. And which trees are low or poor quality; either undesirable or unsuitable to retain and protect.

The tree survey includes all trees included in the land survey red line boundary plan, as well as any that may have been missed, and it should categorize trees or groups of trees, including woodlands for their quality and value within the existing context, in a transparent, understandable and systematic way. Where the arboriculturist has deemed it appropriate, the trees have been tagged with small metal or plastic tags, placed as high as is convenient on the stem of each tree.

Whilst master plan proposals for the development of the site might be available, the trees have been surveyed without taking these into consideration. All detailed design work on site layout should take into consideration the results of the tree survey (and the TCP).

Trees forming groups and areas of woodland (including orchards, wood pasture and historic parkland) are identified and considered as groups where the arboriculturist has determined that this is appropriate, particularly where they contain a variety of species and age classes that could aid long-term management. It is often expedient to assess the quality and value of such groups of trees as a whole, rather than as individuals. However, an assessment of individuals within any group has been undertaken if they are open-grown or if there is a need to differentiate between them.

The quality and value of each tree or group of trees has been recorded by allocating it to one of the four categories; **A**, **B**, **C**, or **U** (highest to lowest quality respectively). The categories are differentiated on the tree survey plan by colour, or by suffixing the category adjacent to the tree identification number on the TCP.

The survey schedule lists all the trees or groups of trees. The following information is also provided:

- a) reference number (to be recorded on the tree survey plan);
- b) species (common or scientific names);
- c) height in meters (m);
- d) stem diameter in millimetres (mm) at 1.5 m above adjacent ground level or immediately above the root flare for multi-stemmed trees;
- e) branch spread in meters taken at the four cardinal compass points;
- f) height of crown clearance above adjacent ground level in meters (m);
- g) age class (Newly planted, Young, Semi-mature, Early mature, Mature, Over mature);
- h) physiological condition (e.g. good, fair, poor, decline and dead);
- i) structural condition (e.g. good, fair, poor and ivy);
- j) comment about the tree, its location and preliminary management recommendations, including further investigation of suspected defects that require more detailed assessment and potential for wildlife habitat; and
- k) The retention category referring to the quality and useful contribution in years; **U** = <10yrs; **A** = >40yrs; **B** = >20yrs; **C** = >10yrs. The retention sub category referring to the type of amenity; 1 = Arboricultural; 2 = Landscape; 3 = Cultural including conservation (see Table 1 Cascade chart for tree quality assessment).

5. Definitions

Arboriculturist

An arboriculturist (or arboricultural consultant) is a person who has, through relevant education, training and experience, gained recognized qualifications and expertise in the field of trees in relation to construction.

Tree Survey

A tree survey should be undertaken by an arboriculturist and should record information about the trees on a site independently of and prior to any specific design for development. As a subsequent task, and with reference to a design or potential design, the results of the survey should be included in the preparation of a tree constraints plan, which should be used to assist with site layout design.

Tree Constraints Plan

A TCP is plan, typically delivered as an AutoCAD drawing (.file format), prepared by an arboriculturist for the purposes of layout design showing the root protection area and representing the effect that the mature height and spread of retained trees will have on layouts through shade, dominance, etc.

Root Protection Area

An RPA is a layout design tool indicating the area surrounding a tree that contains sufficient rooting volume to ensure the survival of the tree, shown in plan form in m².

Construction Exclusion Zone (also termed Tree Protection Zone)

A construction exclusion or tree protection zone is an area based on the RPA (in m²), identified by an arboriculturist, to be protected during development, including demolition and construction work, by the use of barriers and/or ground protection fit for purpose to ensure the successful long-term retention of a tree.

Arboricultural Impact Assessment

This is a study, undertaken by an arboriculturist, to identify, evaluate and possibly mitigate the extent of direct and indirect impacts on existing trees that may arise as a result of the implementation of any site layout proposal.

Tree Protection Plan

A TPP is plan, typically delivered as an AutoCAD drawing (.dwg file format), prepared by an arboriculturist showing the finalized layout proposals, tree retention and tree and landscape protection measures detailed within the arboricultural method statement, which can be shown graphically.

Arboricultural Method Statement

This is a methodology for the implementation of any aspect of development that has the potential to result in loss of or damage to a tree. The AMS is likely to include details of an on-site tree protection monitoring regime.

6. Recommendations

At this stage I have not made any assessment upon the proposed scheme and make the following recommendation to ensure that there are no irrevocable issues to the proposed retained trees and so that no conditions relating to arboriculture are attached to any planning consent secured; obtain an arboricultural report to include:

- a) An arboricultural impact assessment (AIA);
- b) An arboricultural method statement (AMS); and
- c) A tree protection plan drawing (TPP).

7. Limitations

Trees were inspected from using visual observation from ground level only. Trees were not climbed or inspected below ground level. Inaccessible trees will have best estimates made about the location, physical dimensions and characteristics. Trees have been grouped where BS5837 guides us that it is expedient to do so. Trees have been excluded from the survey if they are found by us to be sufficiently far away from the proposed developable area or if they are outside of the red line boundary plan showing the expectations of our Client for the extent of the survey. BS5837 does not draw any distinction between trees subject to statutory protection, such as a Tree Preservation Order (“TPO”), and those trees without. This is principally because a detailed planning consent overrides any TPO protection. Consequently, we do not seek to offer any comparison between or infer any difference in the quality or importance of TPO trees and other trees.

8. Appendices

The following documents were released to the Client as appendices to this report:

- Survey Schedule (.pdf)
- Tree Constraints Plan drawing (.dwg & .pdf)

If you require clarification of information contained herein, please do not hesitate to contact us via 01244 661170.

Yours Sincerely,



Matthew Middle
Principal Arboricultural Consultant

07872 127681
mm@arbtech.co.uk

Appendix 1: Table 1 Cascade chart for tree quality assessment

BS5837:2012 Trees in relation to design, demolition and construction – Recommendations

Table 1

Cascade chart for tree quality assessment

Category and definition	Criteria (including subcategories when appropriate)			Identification on plan
Trees unsuitable for retention (see Note)				
Category U Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years	<ul style="list-style-type: none">• Trees that have serious, irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unviable after removal of other category U trees (e.g. where, for whatever reason, the loss of companion shelter cannot be mitigated by pruning)• Trees that are dead or are showing signs of significant, immediate, and irreversible overall decline• Trees infected with pathogens of significance to the health and/or safety of other trees nearby, or very low quality trees suppressing adjacent trees of better quality <i>NOTE Category U trees can have existing or potential conservation value which might be desirable to preserve; see 4.5.7.</i>			Dark red
	1 Mainly arboricultural qualities	2 Mainly landscape qualities	3 Mainly cultural values, including conservation	
Trees to be considered for retention				
Category A Trees of high quality with an estimated remaining life expectancy of at least 40 years	Trees that are particularly good examples of their species, especially if rare or unusual; or those that are essential components of groups or formal or semi-formal arboricultural features (e.g. the dominate and/or principal trees within an avenue)	Trees, groups or woodlands of particular visual importance as arboricultural and/or landscape features	Trees, groups or woodlands of significant conservation, historical, commemorative or other value (e.g. veteran trees or wood-pasture)	Light green
Category B Trees of moderate quality with an estimated remaining life expectancy of at least 20 years	Trees that might be included in category A, but are downgraded because of impaired condition (e.g. presence of significant though remedial defects, including unsympathetic management and storm damage), such that they are unlikely to be suitable for retention of beyond 40 years; or trees lacking the special quality necessary to merit the category A designation	Trees present in numbers, usually growing as groups or woodlands, such that they attract a higher collective rating than they might as individuals; or trees occurring as collectives but situated so as to make little visual contribution to the wider locality	Trees with material conservation or other cultural value	Mid blue
Category C Trees of low quality with an estimated remaining expectancy of at least 10 years, or young trees with a stem diameter below 150mm	Unremarkable trees of very limited merit or such impaired condition that they do not qualify in higher categories	Trees present in groups or woodlands, but without this conferring on them significantly greater collective landscape value; and/or trees offering low or only temporary/transient landscape value	Trees with no material conservation or other cultural value	Grey

This content is for educational and informative purpose and has been reproduced with the kind permission of BSI Global

Arbtech Consulting Limited is registered in England and Wales: 05678552. VAT: GB903660148

Ecology – Protected Species - Licensing – **Arboriculture** – Biodiversity Net Gain – Land/Topographical Survey

Appendix 2: Schedule of Trees

Tree Survey Schedule

Premier Inn Portsmouth (Havant), 65 Bedhampton Hill, Havant, PO9 3JN

Client Premier Inn Hotels

Survey Date 3rd October 2024

Weather Conditions Overcast but dry

Surveyor Matthew Middle

Key:

Tree Number A unique number or reference to identify trees or groups as shown on associated plans.

Species Common and or taxonomic names.

Height The height of the tree in meters (m).

Trunk Diameter The stem diameter in millimetres (mm) taken at 1.5m above ground level unless otherwise specified.

Canopy Spread The extent of the canopy taken in meters (m) to the principle points of the compass, North (N), East (E), South (S) and West (W).

Crown Clearance The height of canopy clearance above ground level to the lowest point of the canopy, taken in meters (m).

Age Class Age classification; Young (Y), Middle Aged (MA), Mature (M), Late Mature (LM), Veteran (V).

Physiological Condition The general physiological condition of the tree; Average, Below average, Low, Dead.

Structural Condition The general structural condition of the tree; Good, Moderate, Indifferent, Poor, Hazardous.

Comments Notes and general comments on the structural condition of the tree, its environment and it estimated remaining contribution.

Category The retention category referring to the quality and useful contribution in years; **U** = <10yrs; **A** = >40yrs; **B** = >20yrs; **C** = >10yrs. The retention sub category referring to the type of amenity; 1 = Arboricultural; 2 = Landscape; 3 = Cultural including conservation.


Tree No.	Species	Height (M)	Trunk Diameter (MM)	Canopy Spread (M)	Crown Clearance (M)	Age Class	Physiological Condition	Structural Condition	Comments	Category
1	Sycamore	14m	600mm	8m	4m	Middle aged	Average	Moderate	Offsite tree; unable to access and inspect the tree; only visible from within site and over boundary fence; all dimensions estimated.	B (12)
2	Sycamore	14m	900mm @ 250mm	N8.5m E8.5m S7m W6m	N5m E4m S2m W3m	Mature	Average	Moderate	Twin-stemmed from 1.5m; managed canopy.	B (12)
3	Beech	14m	830mm @ 250mm	N8.5m E7m SE9m S9m W7m	N4m SE3m S3m W3.5m	Middle aged	Below average	Moderate	Growing on a bank; adjacent to the sub-station; above average amounts of fragile deadwood.	B (12)
4	Sycamore	14m	490mm 230mm	N7m NE8.5m E10m SE11m S10m	N4m NE4m E3.5m SE1m S2m	Middle aged	Average	Moderate	Growing at the top of a bank; single intermeshing aerodynamic canopy.	B (12)
5			660mm Over ivy	SW7m W7.5m NW8.5m	SW2m W2m NW4m					
6	Ash	6m	260mm	N3.5m E3.5m S4m W3.5m	2m	Young	Average	Indifferent	Growing adjacent to the service area; twin-stemmed from 2m; tight compression fork with included bark.	C (1)
7	Ash	6m	180mm	N2.5m E3m S3.5m W3m	2m	Young	Below average	Moderate	Slightly sparsely foliated; one-sided crown as suppressed by the adjacent tree.	C (1)

Tree No.	Species	Height (M)	Trunk Diameter (MM)	Canopy Spread (M)	Crown Clearance (M)	Age Class	Physiological Condition	Structural Condition	Comments	Category
8	Ash	10m	550mm 650mm # Over ivy	N7.5m E7m S7m W7m	N2m S4m SW1.5m W4m NW1m	Middle aged	Below average	Indifferent	Twin stemmed from base; heavily ivy covered to almost full height; unable to view trunk or unions due to ivy; slightly sparsely foliated.	B (12)
9	Whitebeam	7m	180mm	4m	2m	Young	Average	Moderate	Multi-stemmed from 1.75m; intermeshing canopy with adjacent trees.	B (1)
10	Whitebeam	8m	290mm Over ivy	N5m E5m S2m W5m	2m	Young	Average	Moderate	Multi-stemmed from 1.75m; ivy-covered to almost full height; one-sided crown as suppressed by an adjacent tree; intermeshing canopy with adjacent trees.	B (1)
11	Sycamore	10m	250mm 320mm Over ivy	N5m E6m S5m W7.5m	2m	Middle aged	Average	Indifferent	Twin stemmed from base; heavily ivy covered to almost full height; one-sided crown as suppressed by an adjacent tree; intermeshing canopy with adjacent trees.	B (12)
12	Lawson cypress	4.5m	150mm 130mm	2m	N1m NE2m E1m S1m W1m	Young	Below average	Moderate	Twin stemmed from base; slightly sparsely foliated.	C (1)
13	Himalayan birch	5m	200mm @ 250mm	4m	2m	Young	Average	Moderate	Twin-stemmed from 0.8m; three-stemmed by 1.4m; ornamental tree, growing from within a planting pit within hard surfacing.	B (1)

Tree No.	Species	Height (M)	Trunk Diameter (MM)	Canopy Spread (M)	Crown Clearance (M)	Age Class	Physiological Condition	Structural Condition	Comments	Category
14	Paper-bark birch	5m	150mm # @ 250mm	4.5m	2m	Young	Average	Moderate	Ornamental trees, growing from within a low-level area of shrubs; multi-stemmed from 0.5m.	B (1)
15			150mm # @ 250mm							
G1	Various	12m	Max 500mm	6m	0m	Young to middle aged	Average	Moderate	Boundary group; species include: Leyland cypress, Sycamore, Bay, Hawthorn and Beech & mixed shrubs.	C (2)
G2	Hazel	3m	Max. 30 stems @ 20mm	2.5m	0m	Young	Average	Moderate	Group of multi-stemmed coppice.	C (2)
G3	Various	3.5m	Max. 15 stems @ 30mm #	3m	2m	Young to middle aged	Average	Moderate	Offsite group; species include: Japanese maple & mixed shrubs.	C (12)
G4	Various	13m	Max. 600mm #	8m	1m	Young to middle aged	Average	Moderate	Offsite boundary group; species include: Wild cherry, Lime, Apple, Hawthorn, Dogwood, Lawson cypress and Golden false acacia.	B (2)
G5	Various	5m	Max. 320mm #	6m	0m	Young to middle aged	Average	Moderate	Boundary group, consisting of both on and offsite trees; species include: Wild cherry, Ash, Pissards plum, Sycamore and Hawthorn.	C (2)

Tree No.	Species	Height (M)	Trunk Diameter (MM)	Canopy Spread (M)	Crown Clearance (M)	Age Class	Physiological Condition	Structural Condition	Comments	Category
G6	Various	10m	Max. 350mm #	8m	0.5m	Young to middle aged	Average	Moderate	Boundary group consisting of on and offsite trees and shrubs; species include: Wild cherry, Sycamore, Holm oak, Ash, Hazel, Silver birch, Hawthorn, Dogwood, Corsican pine, False acacia, Goat willow & mixed shrubs.	B (2)

Appendix 3: Tree Constraints Plan

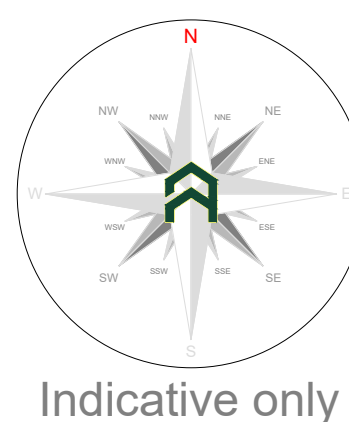

Tree Categories

Trees are categorised in accordance with the cascade chart in Table 1 of the British Standard BS 5837:2012 'Trees in relation to design, demolition and construction - Recommendations'

Category '1' - Trees in such condition that they cannot realistically be retained as living trees in context of the current land use for longer than 10 years.

Category '2' - Trees of high quality with an estimated remaining life expectancy of at least 40 years.

Category '3' - Trees of moderate quality with an estimated remaining life expectancy of at least 20 years.

Category '4' - Trees of low quality with an estimated remaining life expectancy of at least 10 years, or young trees with a stem diameter below 100mm.

Root Protection Area

In order to avoid damage to the roots or rooting environment of retained trees, the Root Protection Areas (RPAs) should be plotted around each of the category '1', '2' and '3' trees. This is a minimum area in m² which should be left undisturbed around each retained tree.

The RPA is calculated using the British Standard BS 5837:2012 'Trees in relation to design, demolition and construction - Recommendations'.

The calculated RPA is capped to 707m², which is the equivalent to a circle with a radius of 15m. Where there appears to be restrictions to root growth the root protection area is reshaped to more accurately reflect the likely distribution of the roots.

Tree Survey Report

Please refer to Arbor Consulting Ltd Tree Survey Report and Tree Schedule for full details on all surveyed trees, hedgerows and major shrub groups.

All trees were surveyed and categorised in accordance with the guidance as set out in the British Standard BS5837:2012 'Tree in relation to design, demolition and construction - Recommendations'.

We make the following recommendation to ensure that no conditions relating to arboriculture are attached to any planning consent secured:

a) An arboricultural impact assessment (AIA);

b) An arboricultural method statement (AMS); and

c) A tree protection plan (TPP).



Unit 3, Wall House Barns, Chertsey, CH4 0DH
https://arbtech.co.uk, 01244 661170

Project: Premier Inn Portsmouth Hill, Havant, PO9 3JN.

Client: Premier Inn Hotels

Drawing: Tree Constraints Plan

Based on: 641047/1

Drawing No: Arbtech TCP 01

Date: Oct 2024 Scale: 1:200 @ A0 Drawn: MGM

Key:	
Tree No:	1 Tree Canopies:
RPAs:	Category '1' trees:
Category '2' trees:	Category '3' groups:

All dimensions should be provided in m, to 1 decimal place. To be rounded down to the nearest 10mm. Dimensions should be provided in m, to 1 decimal place. To be rounded down to the nearest 10mm. Dimensions should be provided in m, to 1 decimal place. To be rounded down to the nearest 10mm.



9. Document Production Record

Document number	Editor	Signature	Position	Issue number	Date
Arbtech TSR 01	Matthew Middle		Principal Arboricultural Consultant	01	07/10/24

Limitations

Arbtech Consulting Ltd has prepared this Report for the sole use of the above named Client/Agent in accordance with our terms of business, under which our services were performed. No other warranty, expressed or implied, is made as to the professional advice included in this Report or any other services provided by us. This Report may not be relied upon by any other party without the prior and express written agreement of Arbtech Consulting Ltd. The assessments made assume that the sites and facilities will continue to be used for their current purpose without significant change. The conclusions and recommendations contained in this Report are based upon information provided by others and upon the assumption that all relevant information has been provided by those parties from whom it has been requested. Information obtained from third parties has not been independently verified by Arbtech Consulting Ltd.

Copyright

© This Report is the copyright of Arbtech Consulting Ltd. Any unauthorised reproduction or usage by any person other than the addressee is strictly prohibited.