


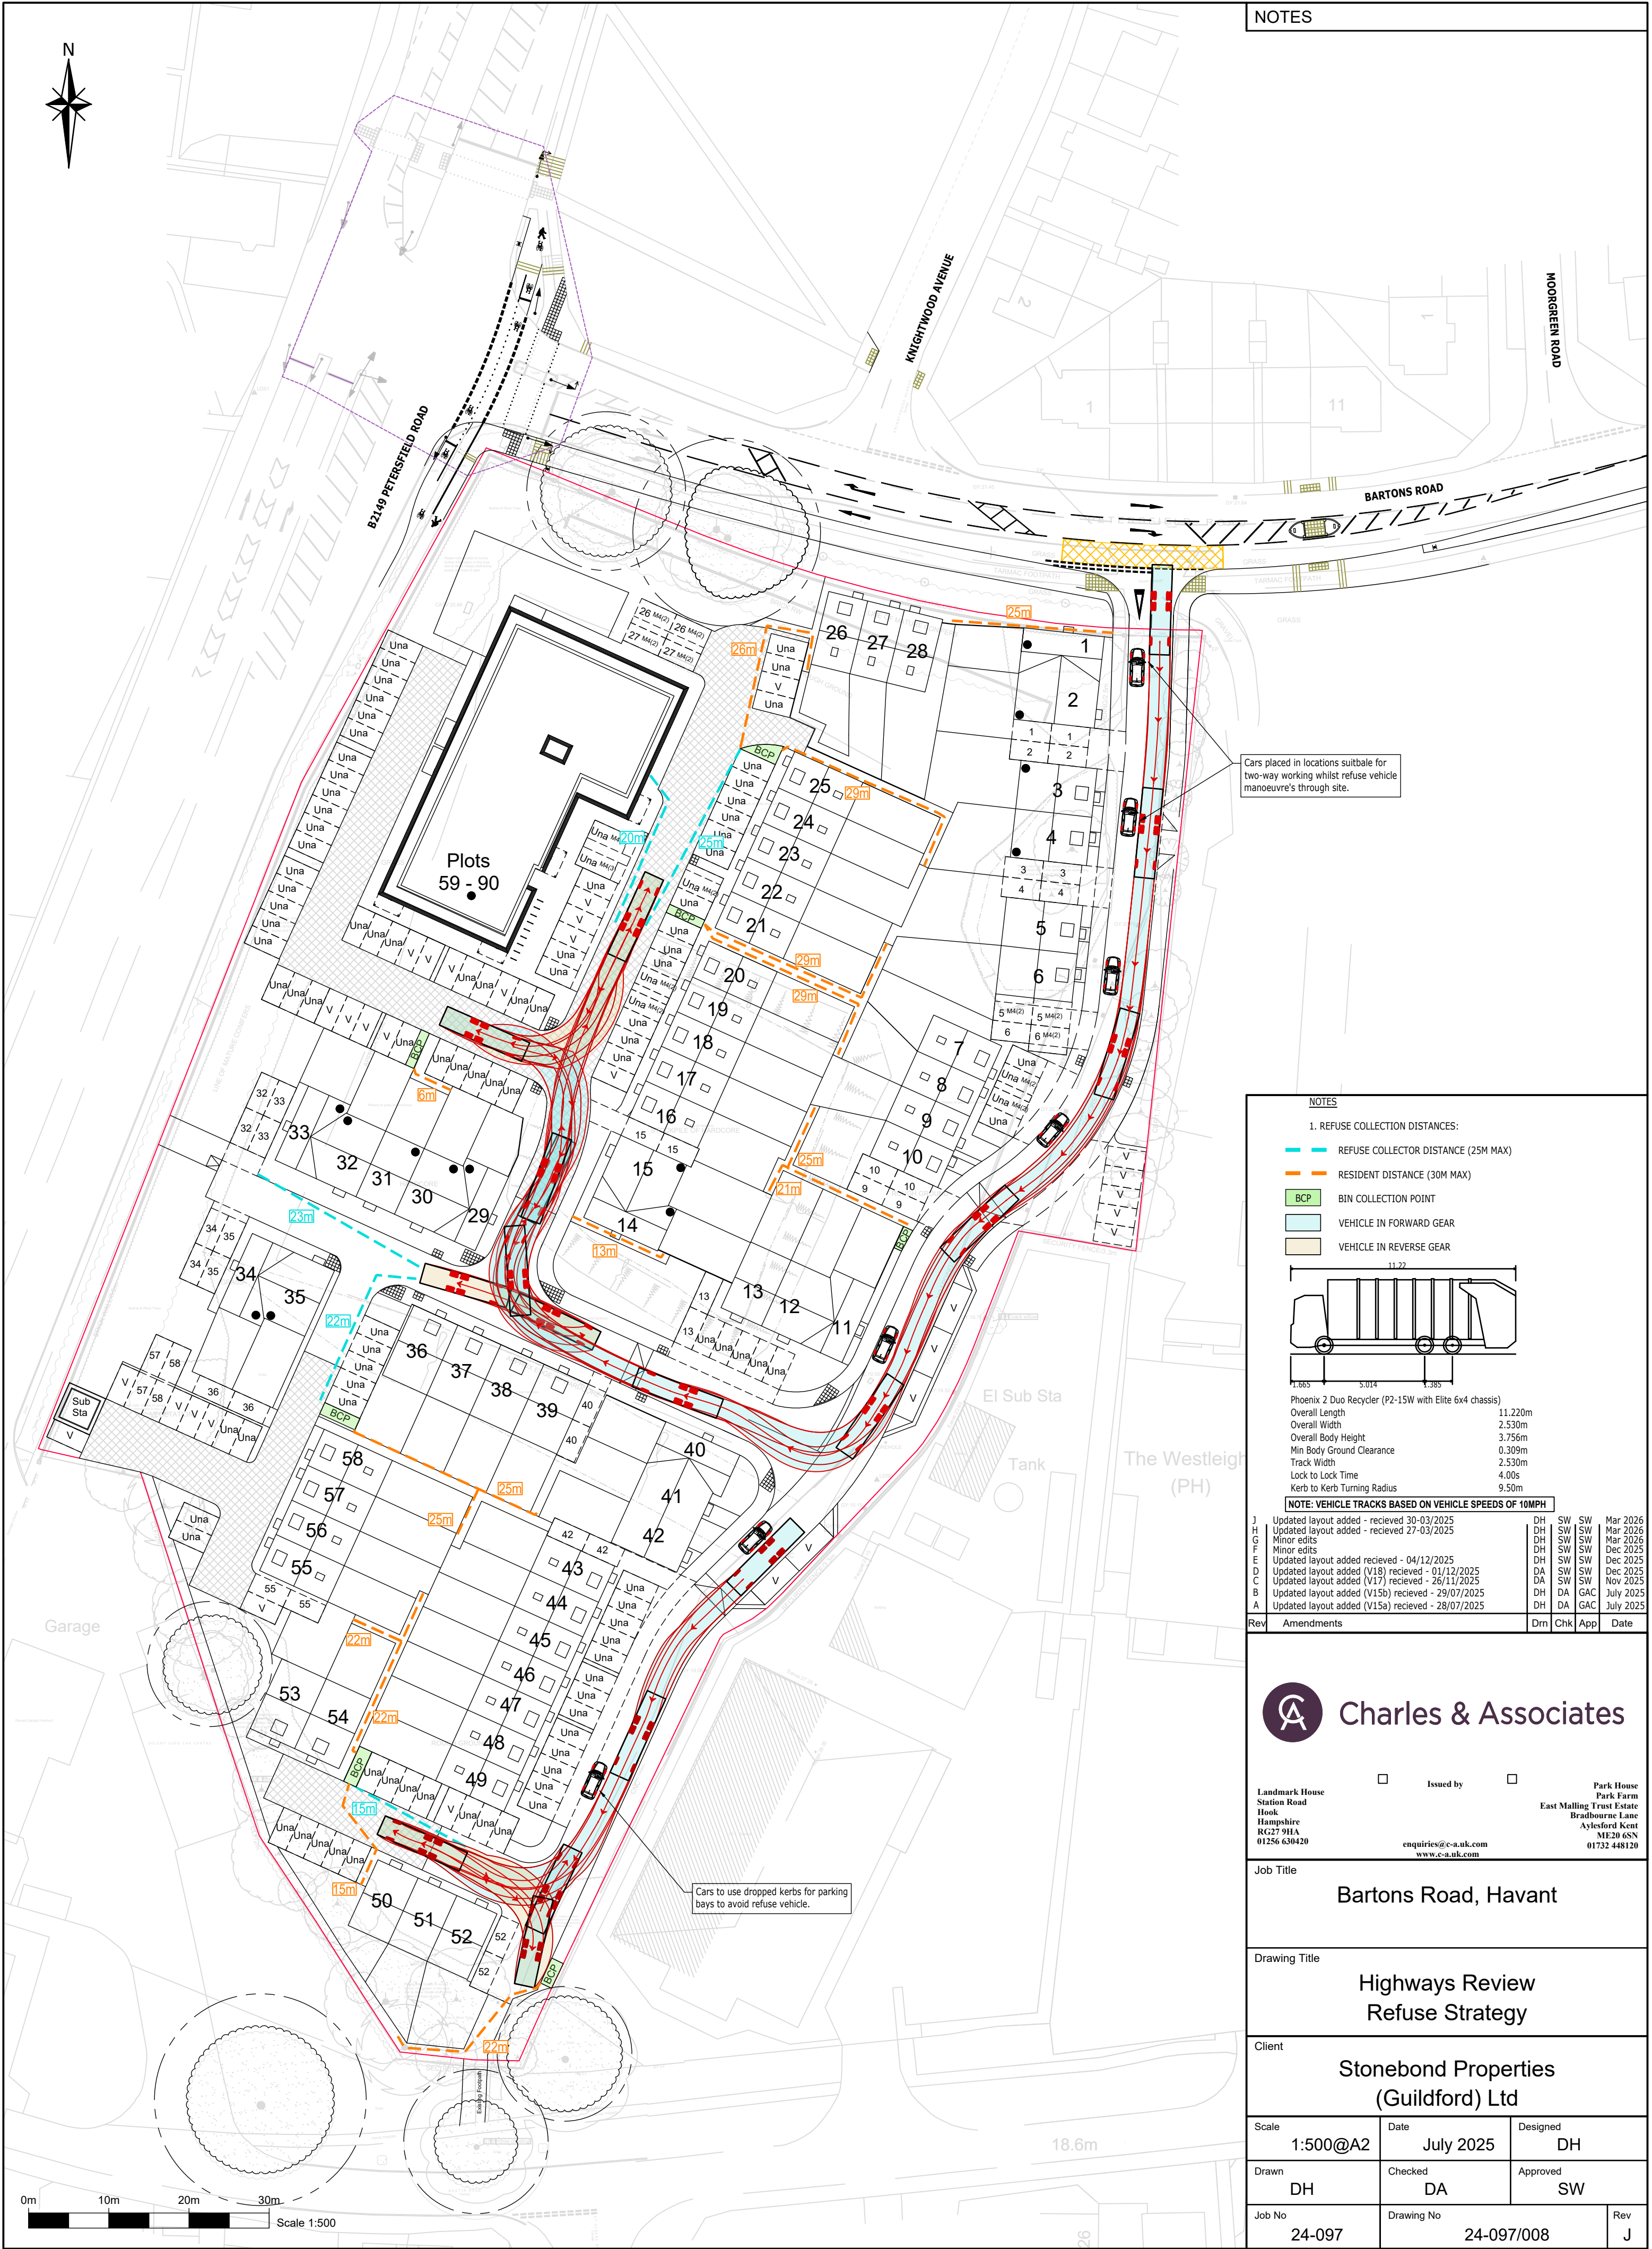


Cars placed in locations suitable for two-way working whilst refuse vehicle manoeuvre's through site.

Cars to use dropped kerbs for parking bays to avoid refuse vehicle.

NOTES

1. REFUSE COLLECTION DISTANCES:

- REFUSE COLLECTOR DISTANCE (25M MAX)
- RESIDENT DISTANCE (30M MAX)
- BCP BIN COLLECTION POINT
- VEHICLE IN FORWARD GEAR
- VEHICLE IN REVERSE GEAR

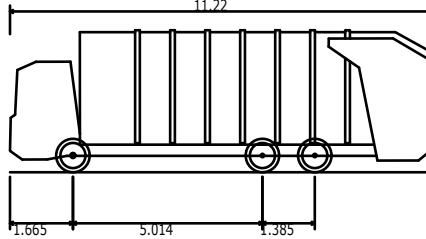

Phoenix 2 Duo Recycler (P2-15W with Elite 6x4 chassis)
Overall Length 11.220m
Overall Width 2.530m
Overall Body Height 3.756m
Min Body Ground Clearance 0.309m
Track Width 2.530m
Lock to Lock Time 4.00s
Kerb to Kerb Turning Radius 9.50m

NOTE: VEHICLE TRACKS BASED ON VEHICLE SPEEDS OF 10MPH

J	Updated layout added - recieved 30-03/2025	DH	SW	SW	Mar 2026
H	Updated layout added - recieved 27-03/2025	DH	SW	SW	Mar 2026
G	Minor edits	DH	SW	SW	Mar 2026
F	Minor edits	DH	SW	SW	Dec 2025
E	Updated layout added recieved - 04/12/2025	DH	SW	SW	Dec 2025
D	Updated layout added (V18) recieved - 01/12/2025	DA	SW	SW	Dec 2025
C	Updated layout added (V17) recieved - 26/11/2025	DA	SW	SW	Nov 2025
B	Updated layout added (V15b) recieved - 29/07/2025	DH	DA	GAC	July 2025
A	Updated layout added (V15a) recieved - 28/07/2025	DH	DA	GAC	July 2025

Rev	Amendments	Drm	Chk	App	Date
-----	------------	-----	-----	-----	------



Landmark House
Station Road
Hook
Hampshire
RG27 9HA
01256 630420

Issued by

Park House
Park Farm
East Malling Trust Estate
Bradbourne Lane
Aylesford Kent
ME20 6SN
01732 448120

enquiries@c-a.uk.com
www.c-a.uk.com

Job Title

Bartons Road, Havant

Drawing Title

Highways Review
Refuse Strategy

Client

Stonebond Properties
(Guildford) Ltd

Scale

1:500@A2

Date

July 2025

Designed

DH

Drawn

DH

Checked

DA

Approved

SW

Job No

24-097

Drawing No

24-097/008

Rev

J