



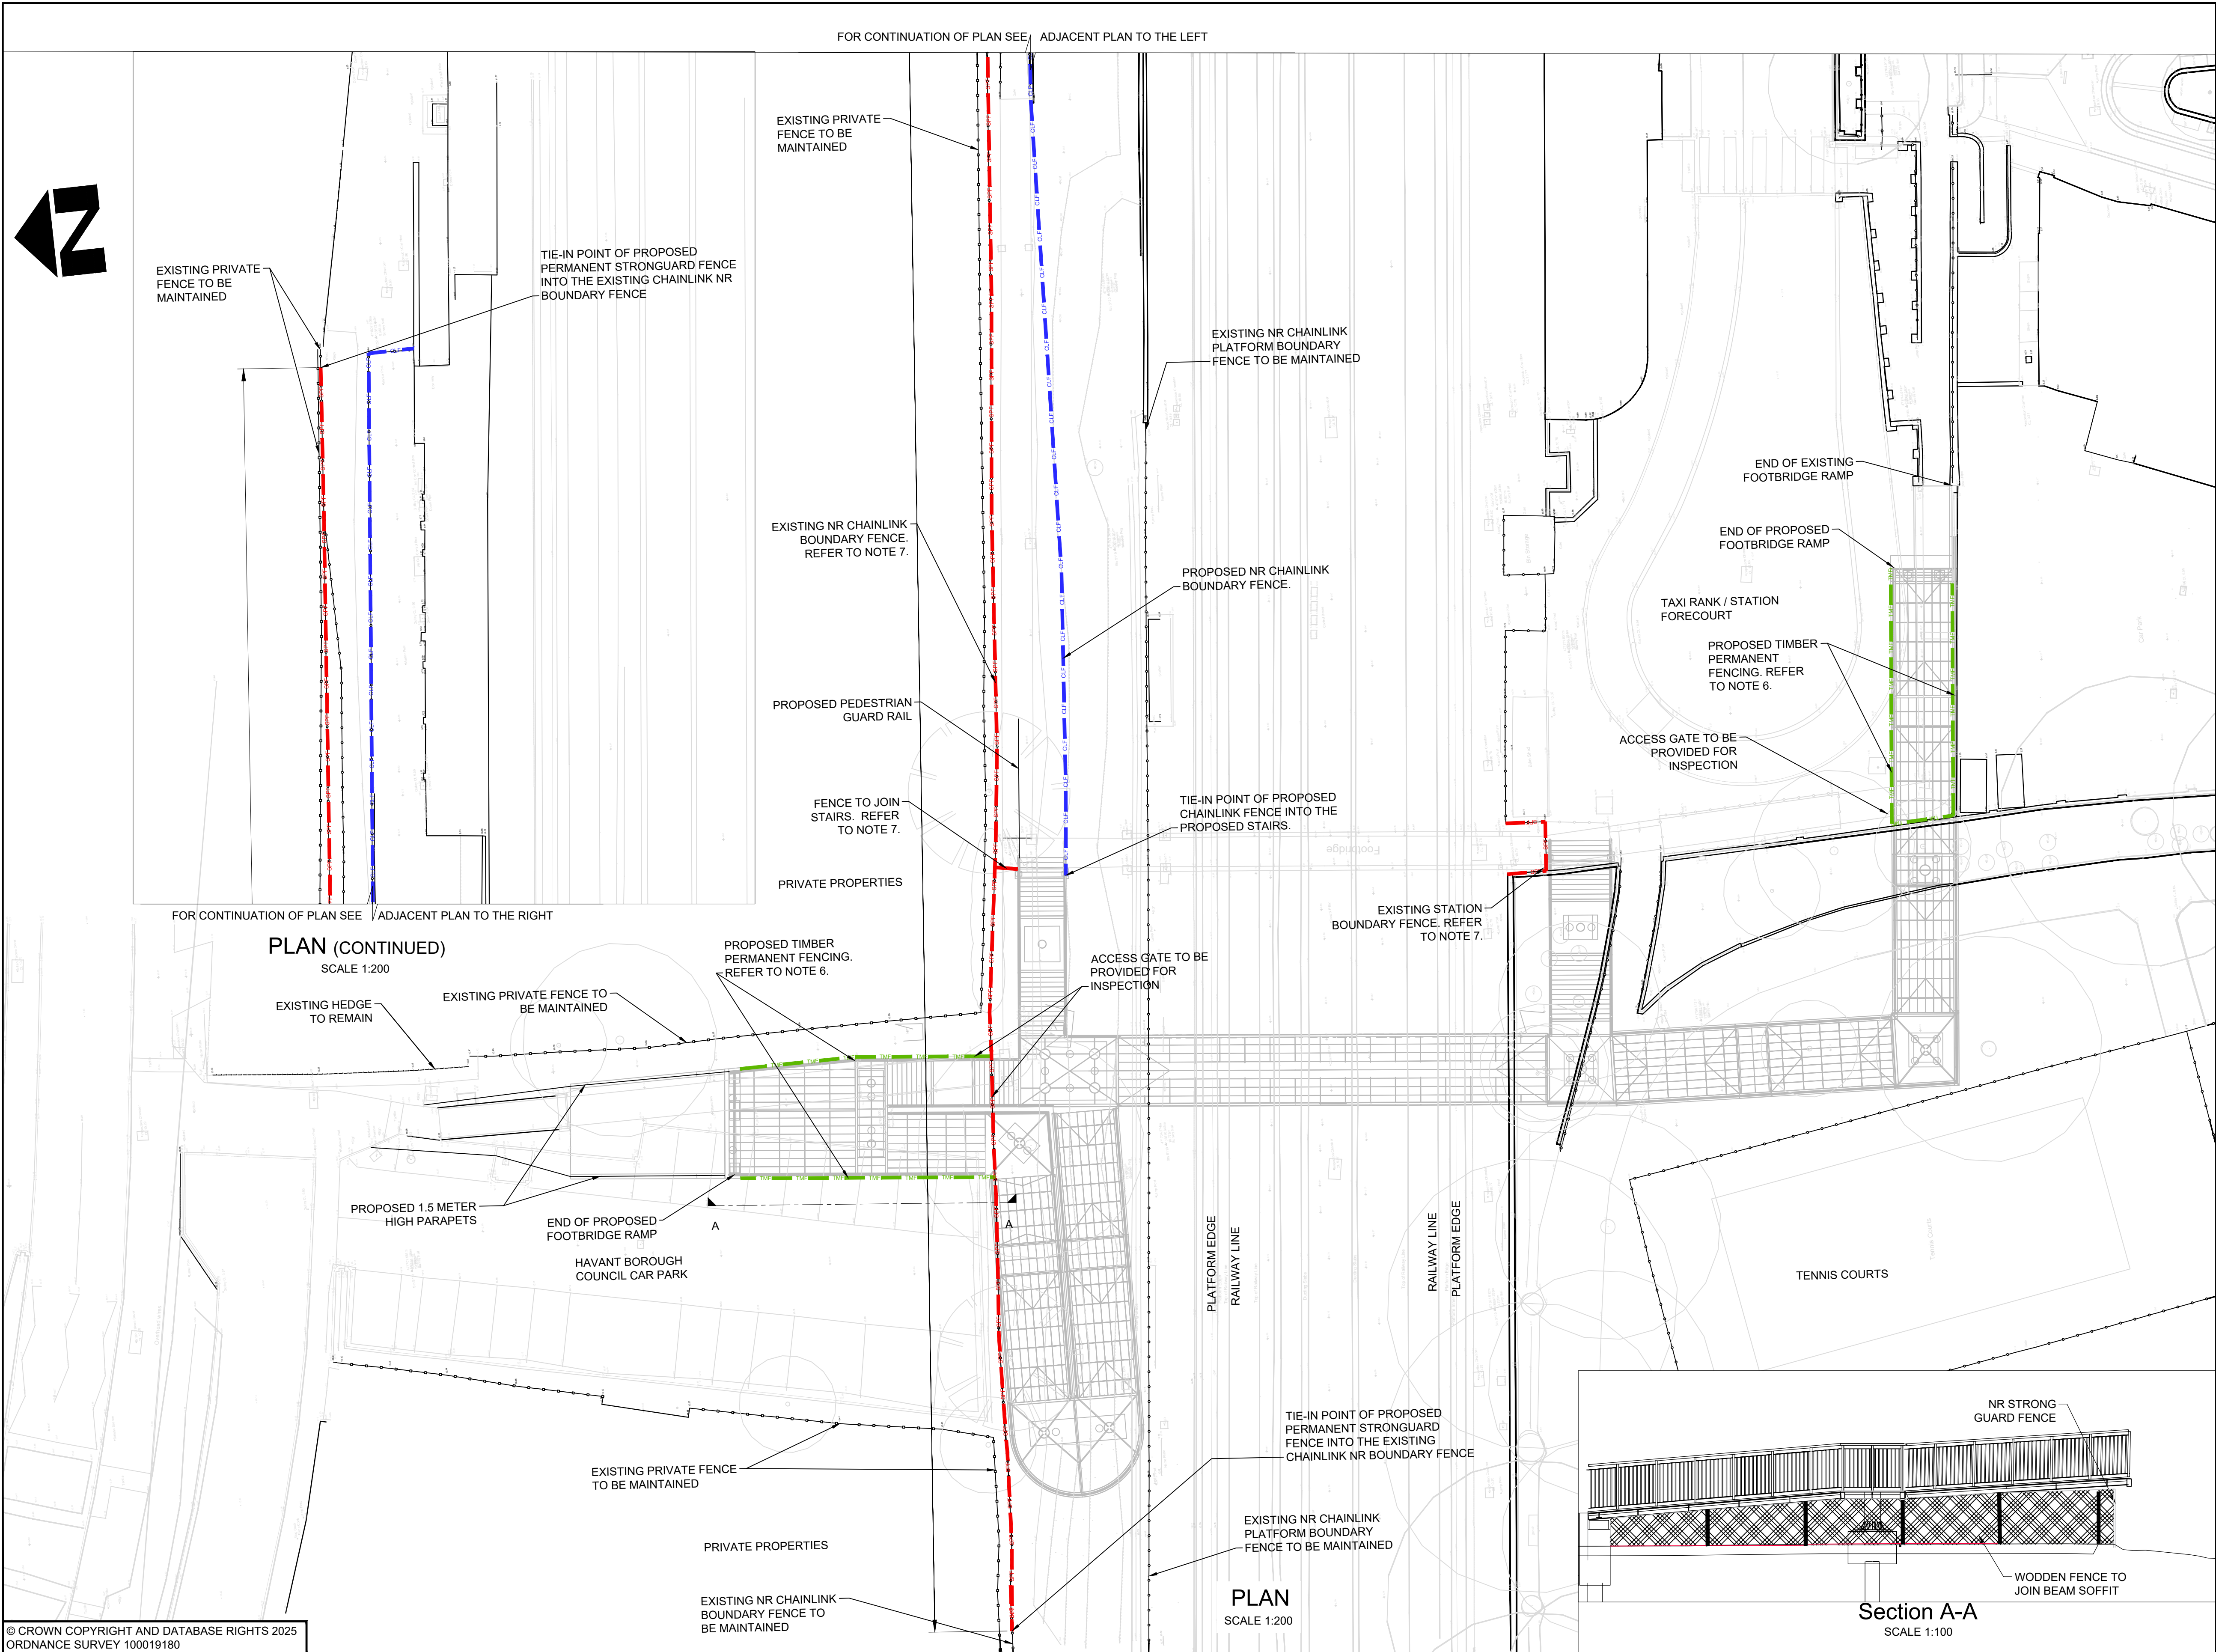

- NOTES**
- DO NOT SCALE FROM THIS DRAWING.
 - ALL DIMENSIONS IN MILLIMETRES AND LEVELS ARE IN METRES UNLESS OTHERWISE STATED. ALL LEVELS ARE RELATIVE TO A LOCAL DATUM.
 - ALL DIMENSIONS AND LEVELS TO BE VERIFIED ON SITE PRIOR TO COMMENCEMENT OF WORKS.
 - DRAWING TO BE READ IN CONJUNCTION WITH ALL OTHER CONTRACT DRAWINGS. SEE APPENDIX 0/4.
 - THE INNER LAYER OF BOUNDARY FENCING IMMEDIATELY BEHIND THE STATION PLATFORMS SHALL REMAIN IN PLACE THROUGHOUT THE WORKS PERIOD AND SHALL NOT BE REMOVED, ALTERED, DAMAGED, OR OTHERWISE TAMPERED WITH AT ALL TIMES TO PREVENT UNAUTHORISED ACCESS ONTO THE NETWORK RAIL INFRASTRUCTURE.
 - TIMBER FENCING BENEATH THE BEAM SOFFIT ALONG THE RAMP / STAIR, WITH THE FENCE HEIGHT NOT EXCEEDING 1.8 M AT ANY POINT.
 - ALL EXISTING FENCING AT BOUNDARY WITH NETWORK RAIL (NR) LAND REMOVED TO ENABLE THE WORKS TO TAKE PLACE SHALL BE REPLACED WITH PALISADE TYPE FENCE IN ACCORDANCE WITH NR STANDARD DRAWING NO NR/OTL/SD/BM/109-B01. THE TIE-IN POINTS ON THIS DRAWING ARE FOR GUIDANCE ONLY. THESE SHALL BE AGREED ON SITE WITH THE SUPERVISOR.
 - PROPOSED CHAIN LINK FENCE IN NETWORK RAIL NON OPERATIONAL LAND SHALL BE IN ACCORDANCE WITH NR STANDARD DRAWING NO NR/OTL/SD/BM/106-B01.
 - REFER TO APPENDIX 3 OF THE SPECIFICATION FOR DETAILS REGARDING PERMANENT FENCES.
 - EXISTING STATION BOUNDARY FENCE ATTACHED TO THE FOOTBRIDGE TRESTLE/COLUMN SHALL BE CAREFULLY REMOVED TO FACILITATE FOOTBRIDGE REMOVAL AND SUBSEQUENTLY REINSTATED AS AGREED WITH NETWORK RAIL.

- KEY**
- PROPOSED TIMBER FENCING TMF
 - PROPOSED STEEL PALISADE FENCE SPF
 - PROPOSED CHAINLINK FENCE CLF

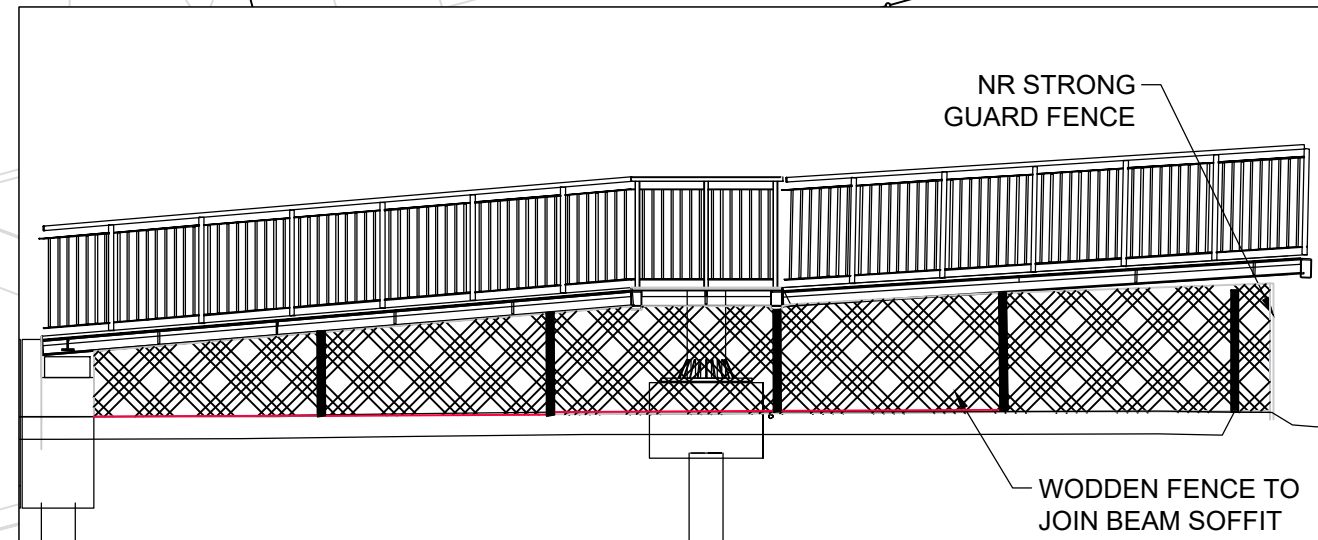

© CROWN COPYRIGHT AND DATABASE RIGHTS 2025
ORDNANCE SURVEY 100019180

SUIT	REV	WORK IN PROGRESS ISSUE AND DESCRIPTION OF AMENDMENTS	DATE	DESIGNER	CAD	CHKD	APPD
D1	P03	ISSUED FOR COSTING	15.07.2026	SJ	SJ	LA	BAH
S0	P02	ISSUED FOR REVIEW	23.06.2026	SJ	SJ	LA	BAH
S0	P01	ISSUED FOR INFORMATION	05.06.2026	SJ	SJ	LA	BAH

CLIENT

**HAMPSHIRE COUNTY COUNCIL
UNIVERSAL SERVICES DIRECTORATE
TRANSPORT IMPLEMENTATION**

CONSULTANT



Hampshire
County Council

Engineering Services

TIM LAWTON BEng CEng FICE FCIHT : ASSISTANT DIRECTOR OF UNIVERSAL SERVICES

HORIZONTAL SCALE @ A1 1:200	SCHEME HAVANT FOOTBRIDGE REPLACEMENT JOB No. C.J009595.01	DRAWING TITLE PROPOSED PERMANENT FENCING HCC CAD PLOT: 24/7/2028 10:56:29	
VERTICAL SCALE @ A1 N/A			
SHEET NUMBER 1 OF 1			
CJ009595-HES-SGN- FB1051 -DR-CB-0005		SUIT D1	REV P03