





EXISTING FRONT ELEVATION

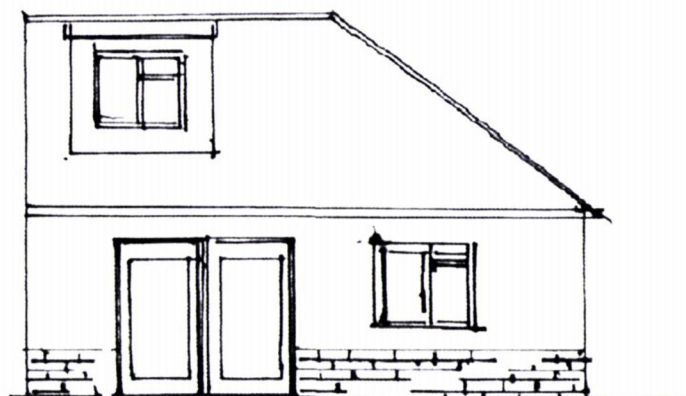

EXISTING REAR ELEVATION

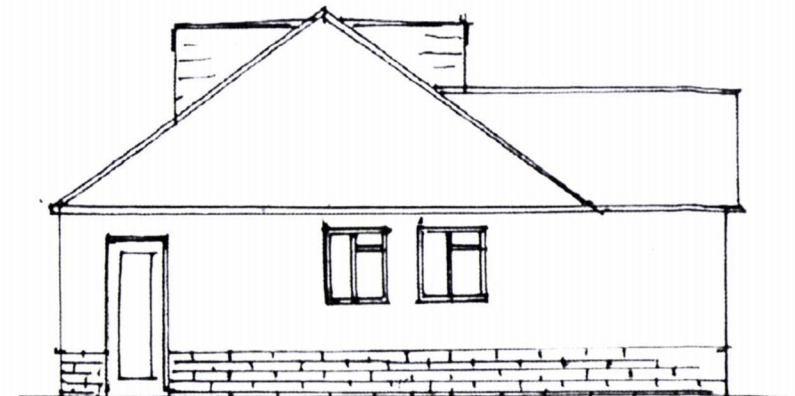


EXISTING SIDE ELEVATION




PROPOSED FRONT ELEVATION



PROPOSED REAR ELEVATION

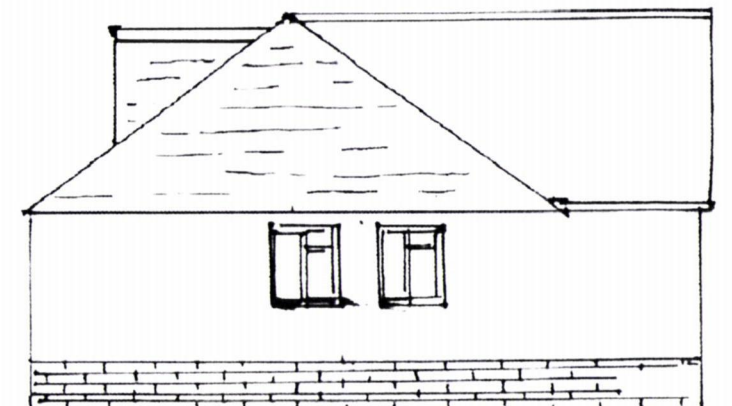

PROPOSED, SIDE ELEVATION

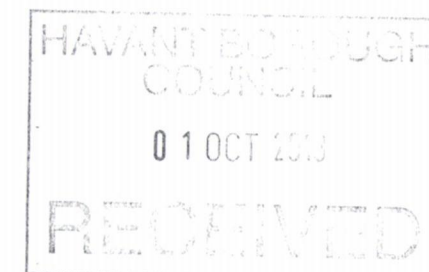

PITCHED ROOF CONSTRUCTION :

MADEIRA MENDIP OR SIMILAR CONCRETE INTERLOCKING ROOF TILE ON 50x25. ON TREATED ROOFING BATTEN. TO MAIN ROOF STRUCTURE. CONCRETE PLAIN TILES TO DORMERS ON 50x25 TREATED BATTENS. ALL ON BREATHABLE ROOFING FELT.

C16 GRADE RAFTERS TO BE 150x50mm. C16 GRADE RIDGE, VALLEY AND HIPS. RAFTERS BLIND MOUNTED OVER 100x50mm WAPL PLATE, BEDDED TO TOP OF WAPL & SECURED WITH VERTICAL RESTRAINT STRAPS.

VENTILATION PROVIDED BY CONTINUOUS OVER FACIA VENTS.

CEILING & FLOOR JOISTS :

C16 220x50 FIRST FLOOR JOISTS, SOLID NOGINS @ NO GREATER THAN 2.1M SPANS. C16 150x50 CEILING COLLARS. ALL JOISTS, RAFTERS & COLLARS TO BE SECURED TOGETHER USING DOG TOOTH WASHERS & BOLTS.

SCALE 1:100 @ A3

10 SILVERDALE DRIVE, WATERLOOVILLE. PO7 6DN
PROPOSED ROOF & SIDE EXTENSIONS
SCALE 1:100 @ A3

REV D