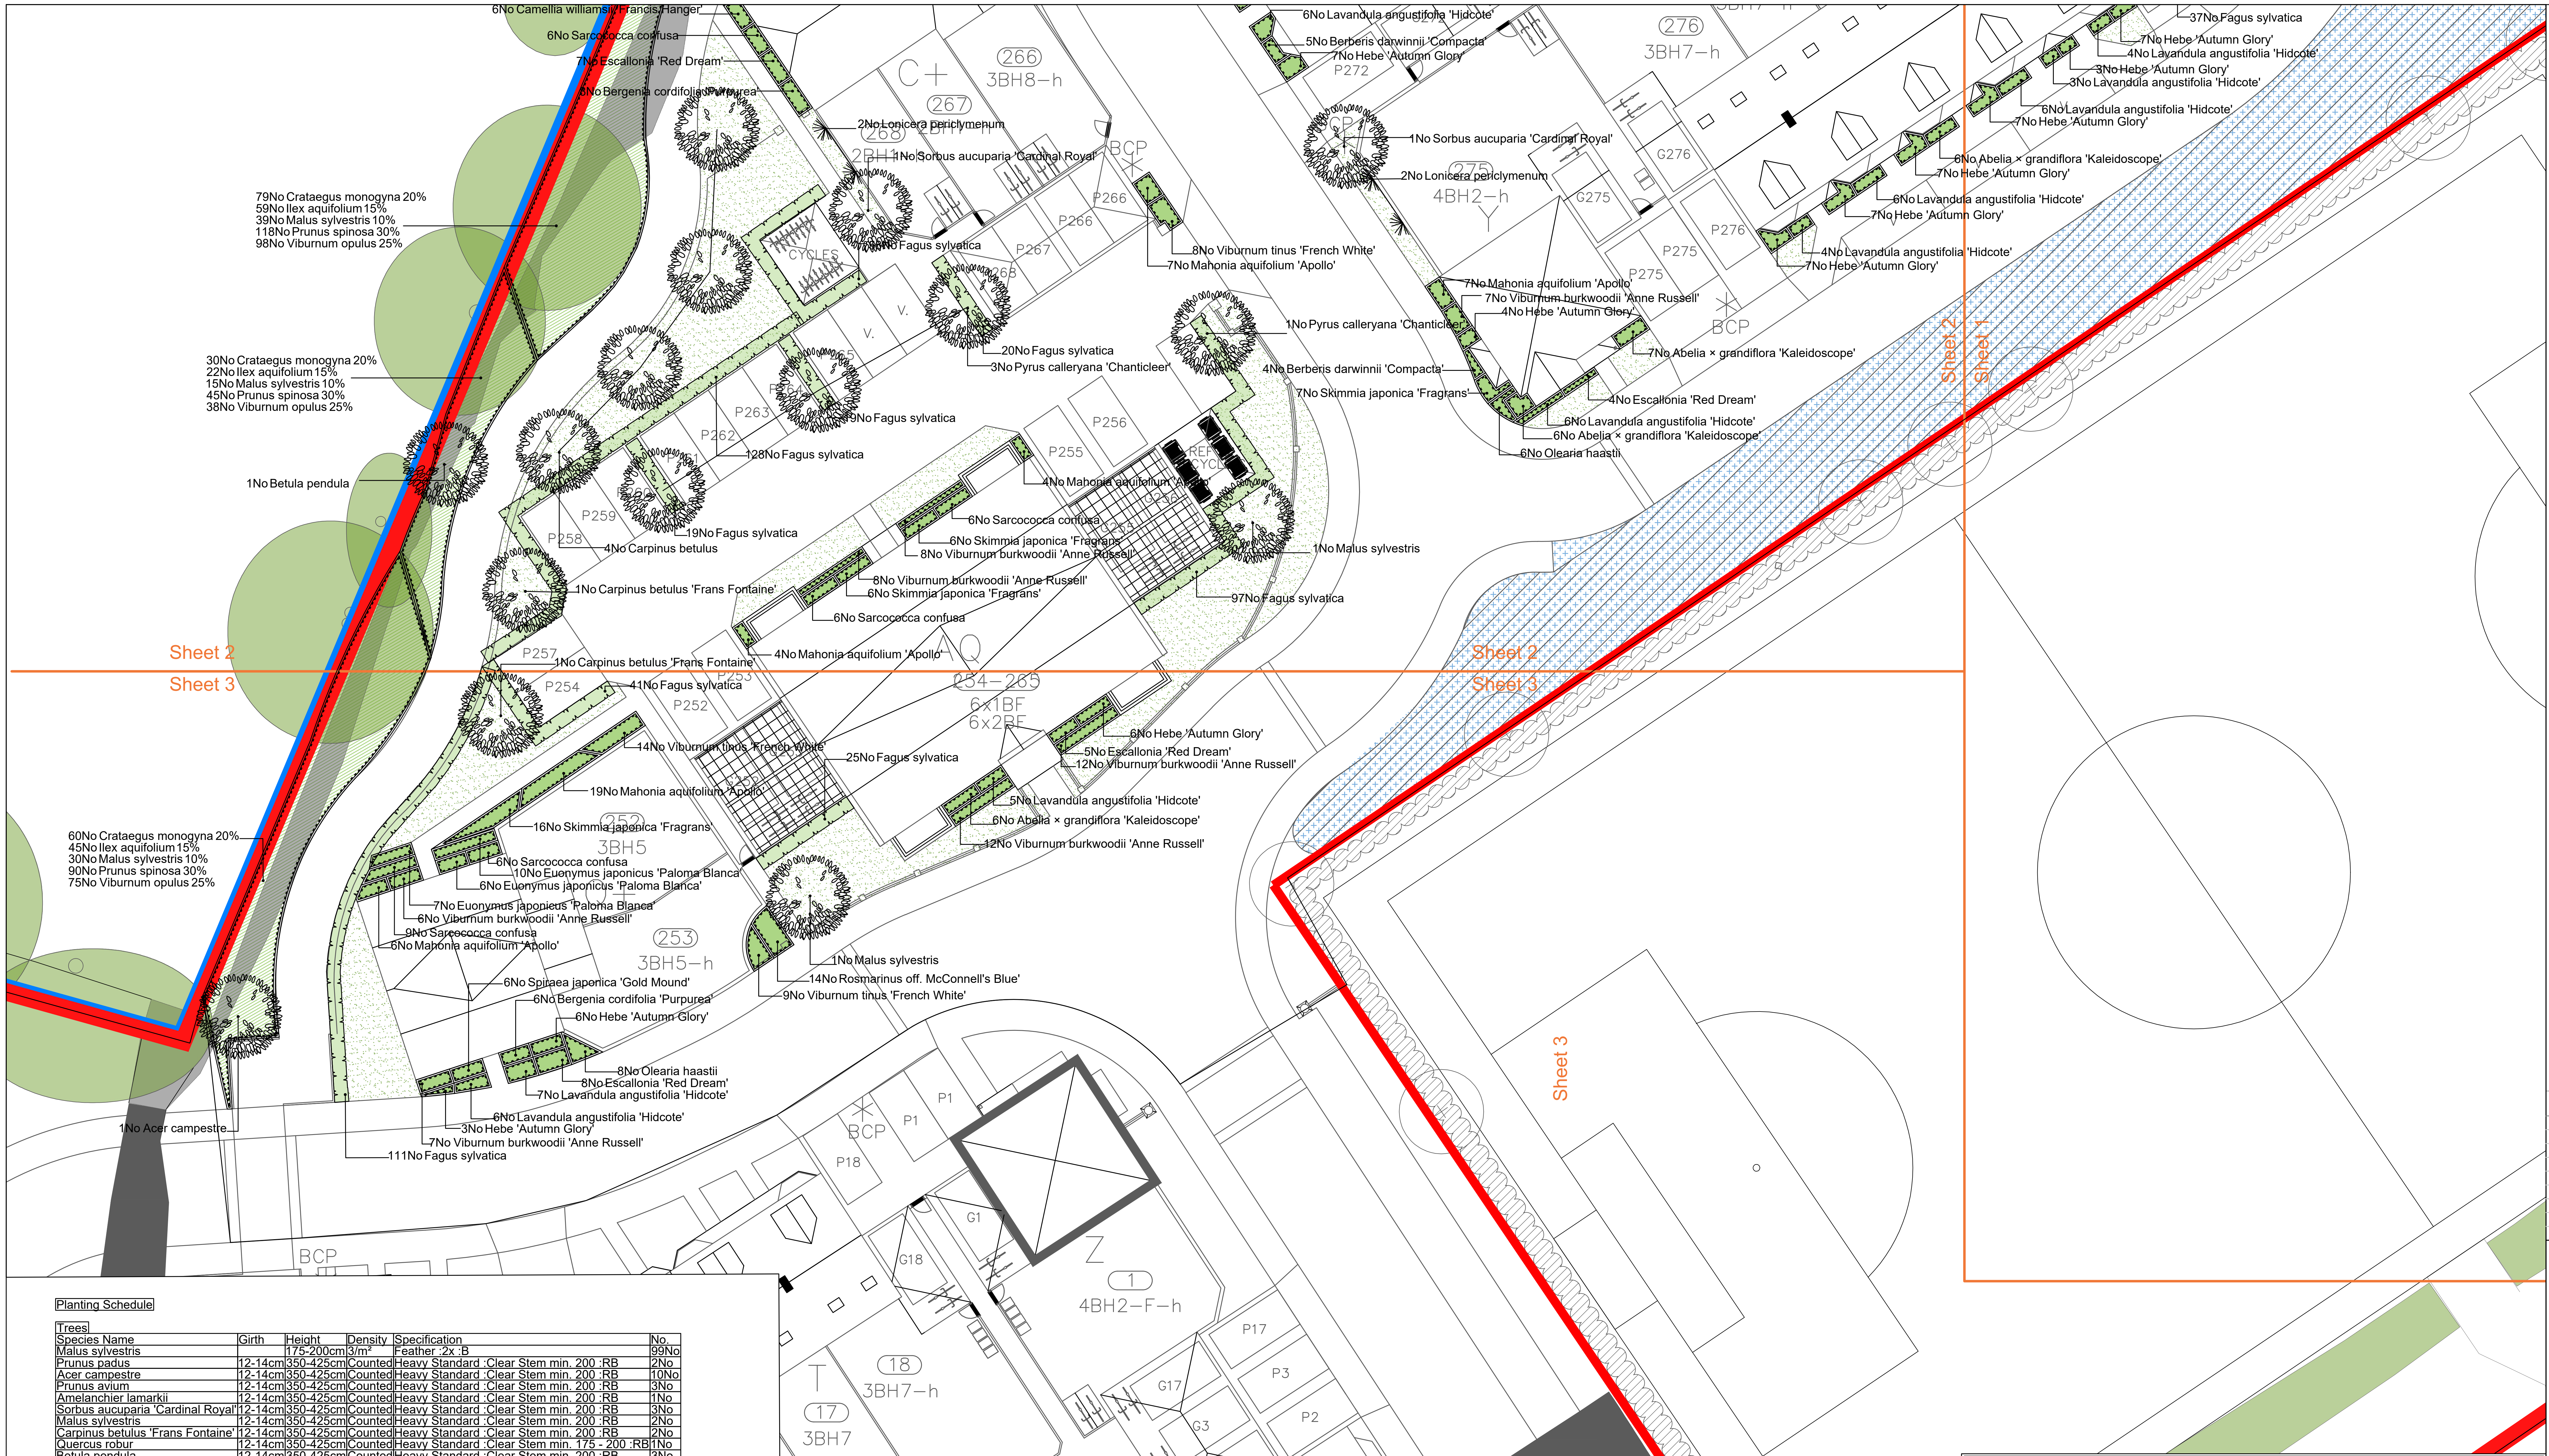
6No Camellia williamsii 'Francis Hanger'
6No Sarcococca confusa
7No Escallonia 'Red Dream'
3No Bergenia cordifolia 'Purpurea'
2No Lonicera periclymenum
1No Sorbus aucuparia 'Cardinal Royal'
79No Crataegus monogyna 20%
59No Ilex aquifolium 15%
39No Malus sylvestris 10%
118No Prunus spinosa 30%
98No Viburnum opulus 25%
30No Crataegus monogyna 20%
22No Ilex aquifolium 15%
15No Malus sylvestris 10%
45No Prunus spinosa 30%
38No Viburnum opulus 25%
1No Betula pendula
38No Fagus sylvatica
CYCLES
8No Viburnum tinus 'French White'
7No Mahonia aquifolium 'Apollo'
20No Fagus sylvatica
3No Pyrus calleryana 'Chanticleer'
19No Fagus sylvatica
128No Fagus sylvatica
19No Fagus sylvatica
4No Carpinus betulus
1No Carpinus betulus 'Frans Fontaine'
4No Mahonia aquifolium 'Apollo'
6No Sarcococca confusa
6No Skimmia japonica 'Fragrans'
8No Viburnum burkwoodii 'Anne Russell'
8No Viburnum burkwoodii 'Anne Russell'
6No Skimmia japonica 'Fragrans'
6No Sarcococca confusa
4No Mahonia aquifolium 'Apollo'
1No Malus sylvestris
97No Fagus sylvatica
6No Lavandula angustifolia 'Hidcote'
5No Berberis darwinii 'Compacta'
7No Hebe 'Autumn Glory'
1No Sorbus aucuparia 'Cardinal Royal'
2No Lonicera periclymenum
1No Pyrus calleryana 'Chanticleer'
4No Berberis darwinii 'Compacta'
7No Skimmia japonica 'Fragrans'
7No Mahonia aquifolium 'Apollo'
7No Viburnum burkwoodii 'Anne Russell'
4No Hebe 'Autumn Glory'
7No Abelia × grandiflora 'Kaleidoscope'
4No Escallonia 'Red Dream'
6No Lavandula angustifolia 'Hidcote'
6No Abelia × grandiflora 'Kaleidoscope'
6No Olearia haastii
37No Fagus sylvatica
7No Hebe 'Autumn Glory'
4No Lavandula angustifolia 'Hidcote'
3No Hebe 'Autumn Glory'
3No Lavandula angustifolia 'Hidcote'
6No Lavandula angustifolia 'Hidcote'
7No Hebe 'Autumn Glory'
6No Abelia × grandiflora 'Kaleidoscope'
7No Hebe 'Autumn Glory'
6No Lavandula angustifolia 'Hidcote'
7No Hebe 'Autumn Glory'
4No Lavandula angustifolia 'Hidcote'
7No Hebe 'Autumn Glory'
Sheet 2
Sheet 3
Sheet 1
1No Carpinus betulus 'Frans Fontaine'
41No Fagus sylvatica
14No Viburnum tinus 'French White'
25No Fagus sylvatica
19No Mahonia aquifolium 'Apollo'
16No Skimmia japonica 'Fragrans'
6No Sarcococca confusa
10No Euonymus japonicus 'Paloma Blanca'
6No Euonymus japonicus 'Paloma Blanca'
7No Euonymus japonicus 'Paloma Blanca'
6No Viburnum burkwoodii 'Anne Russell'
9No Sarcococca confusa
6No Mahonia aquifolium 'Apollo'
60No Crataegus monogyna 20%
45No Ilex aquifolium 15%
30No Malus sylvestris 10%
90No Prunus spinosa 30%
75No Viburnum opulus 25%
6No Hebe 'Autumn Glory'
5No Escallonia 'Red Dream'
12No Viburnum burkwoodii 'Anne Russell'
5No Lavandula angustifolia 'Hidcote'
6No Abelia × grandiflora 'Kaleidoscope'
12No Viburnum burkwoodii 'Anne Russell'
1No Malus sylvestris
14No Rosmarinus off. McConnell's Blue'
9No Viburnum tinus 'French White'
6No Spiraea japonica 'Gold Mound'
6No Bergenia cordifolia 'Purpurea'
6No Hebe 'Autumn Glory'
8No Olearia haastii
8No Escallonia 'Red Dream'
7No Lavandula angustifolia 'Hidcote'
6No Lavandula angustifolia 'Hidcote'
3No Hebe 'Autumn Glory'
7No Viburnum burkwoodii 'Anne Russell'
111No Fagus sylvatica
1No Acer campestre
266
3BH8–h
267
268
276
3BH7–h
275
4BH2–h
254–265
6x1BF
6x2BF
252
3BH5
253
3BH5–h
1
4BH2–F–h
18
3BH7–h
17
3BH7
2
3BH4
4
3BH–AFF
5
2BH–AFF
6
2BH–AFF
7
2BH–AFF
3
3BH5
BCP

Planting Schedule

Trees

Species Name	Girth	Height	Density	Specification	No.
Malus sylvestris		175-200cm	3/m²	Feather :2x :B	99No
Prunus padus	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	2No
Acer campestre	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	10No
Prunus avium	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	3No
Amelanchier lamarkii	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	1No
Sorbus aucuparia 'Cardinal Royal'	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	3No
Malus sylvestris	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	2No
Carpinus betulus 'Frans Fontaine'	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	2No
Quercus robur	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 175 - 200 :RB	1No
Betula pendula	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	3No
Carpinus betulus	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	4No
Pyrus calleryana 'Chanticleer'	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min. 200 :RB	4No

Shrubs

Species Name	Height	Pot Size	Specification	Density	No.
Abelia × grandiflora 'Kaleidoscope'	30-40cm	3L	Bushy :C	4/m²	36No
Berberis darwinnii 'Compacta'	30-40cm	3L	Bushy :C	4/m²	24No
Camellia williamsii 'Francis Hanger'	30-40cm	3L	Bushy :C	4/m²	17No
Crataegus monogyna	60-80cm	5L-7.5L	Bushy :BR	3/m²	201No
Escallonia 'Red Dream'	30-40cm	3L	Bushy :C	4/m²	44No
Euonymus japonicus 'Paloma Blanca'	30-40cm	3L	Bushy :C	4/m²	55No
Fagus sylvatica	80-100	5L-7.5L	Branched :BR	0.5Ctr Double Staggered at 0.3m offset	690No
Hebe 'Autumn Glory'	30-40cm	3L	Bushy :C	4/m²	77No
Hydrangea macrophylla 'Altona'	30-40cm	3L	Bushy :C	4/m²	30No
Ilex aquifolium	40-60cm	5L-7.5L	Bushy :C	3/m²	150No
Lavandula angustifolia 'Hidcote'	30-40cm	3L	Bushy :C	4/m²	89No
Ligustrum ovalifolium	80-100	5L-7.5L	Branched :BR	0.5Ctr Double Staggered at 0.3m offset	290No
Mahonia aquifolium 'Apollo'	30-40cm	3L	Bushy :C	4/m²	92No
Olearia haastii	30-40cm	3L	Bushy :C	4/m²	61No
Prunus spinosa	60-80cm	5L-7.5L	Bushy :BR	3/m²	302No
Rosmarinus off. McConnell's Blue'	30-40cm	3L	Bushy :C	4/m²	68No
Sarcococca confusa	30-40cm	3L	Bushy :C	4/m²	67No
Skimmia japonica 'Fragrans'	30-40cm	3L	Bushy :C	4/m²	70No
Spiraea japonica 'Gold Mound'	30-40cm	3L	Bushy :C	4/m²	32No
Viburnum burkwoodii 'Anne Russell'	30-40cm	3L	Bushy :C	4/m²	99No
Viburnum opulus	60-80cm	5L-7.5L	Bushy :C	3/m²	251No
Viburnum tinus 'French White'	30-40cm	3L	Bushy :C	4/m²	84No

Climbers

Species Name	Height	Pot Size	Specification	Density	No.
Lonicera periclymenum	80-100cm	3L	Several Shoots :2/3 brks :Caned	Counted	7No

Herbaceous

Species Name	Height	Pot Size	Specification	Density	No.
Bergenia cordifolia 'Purpurea'		3L	Full Pot	4/m²	45No

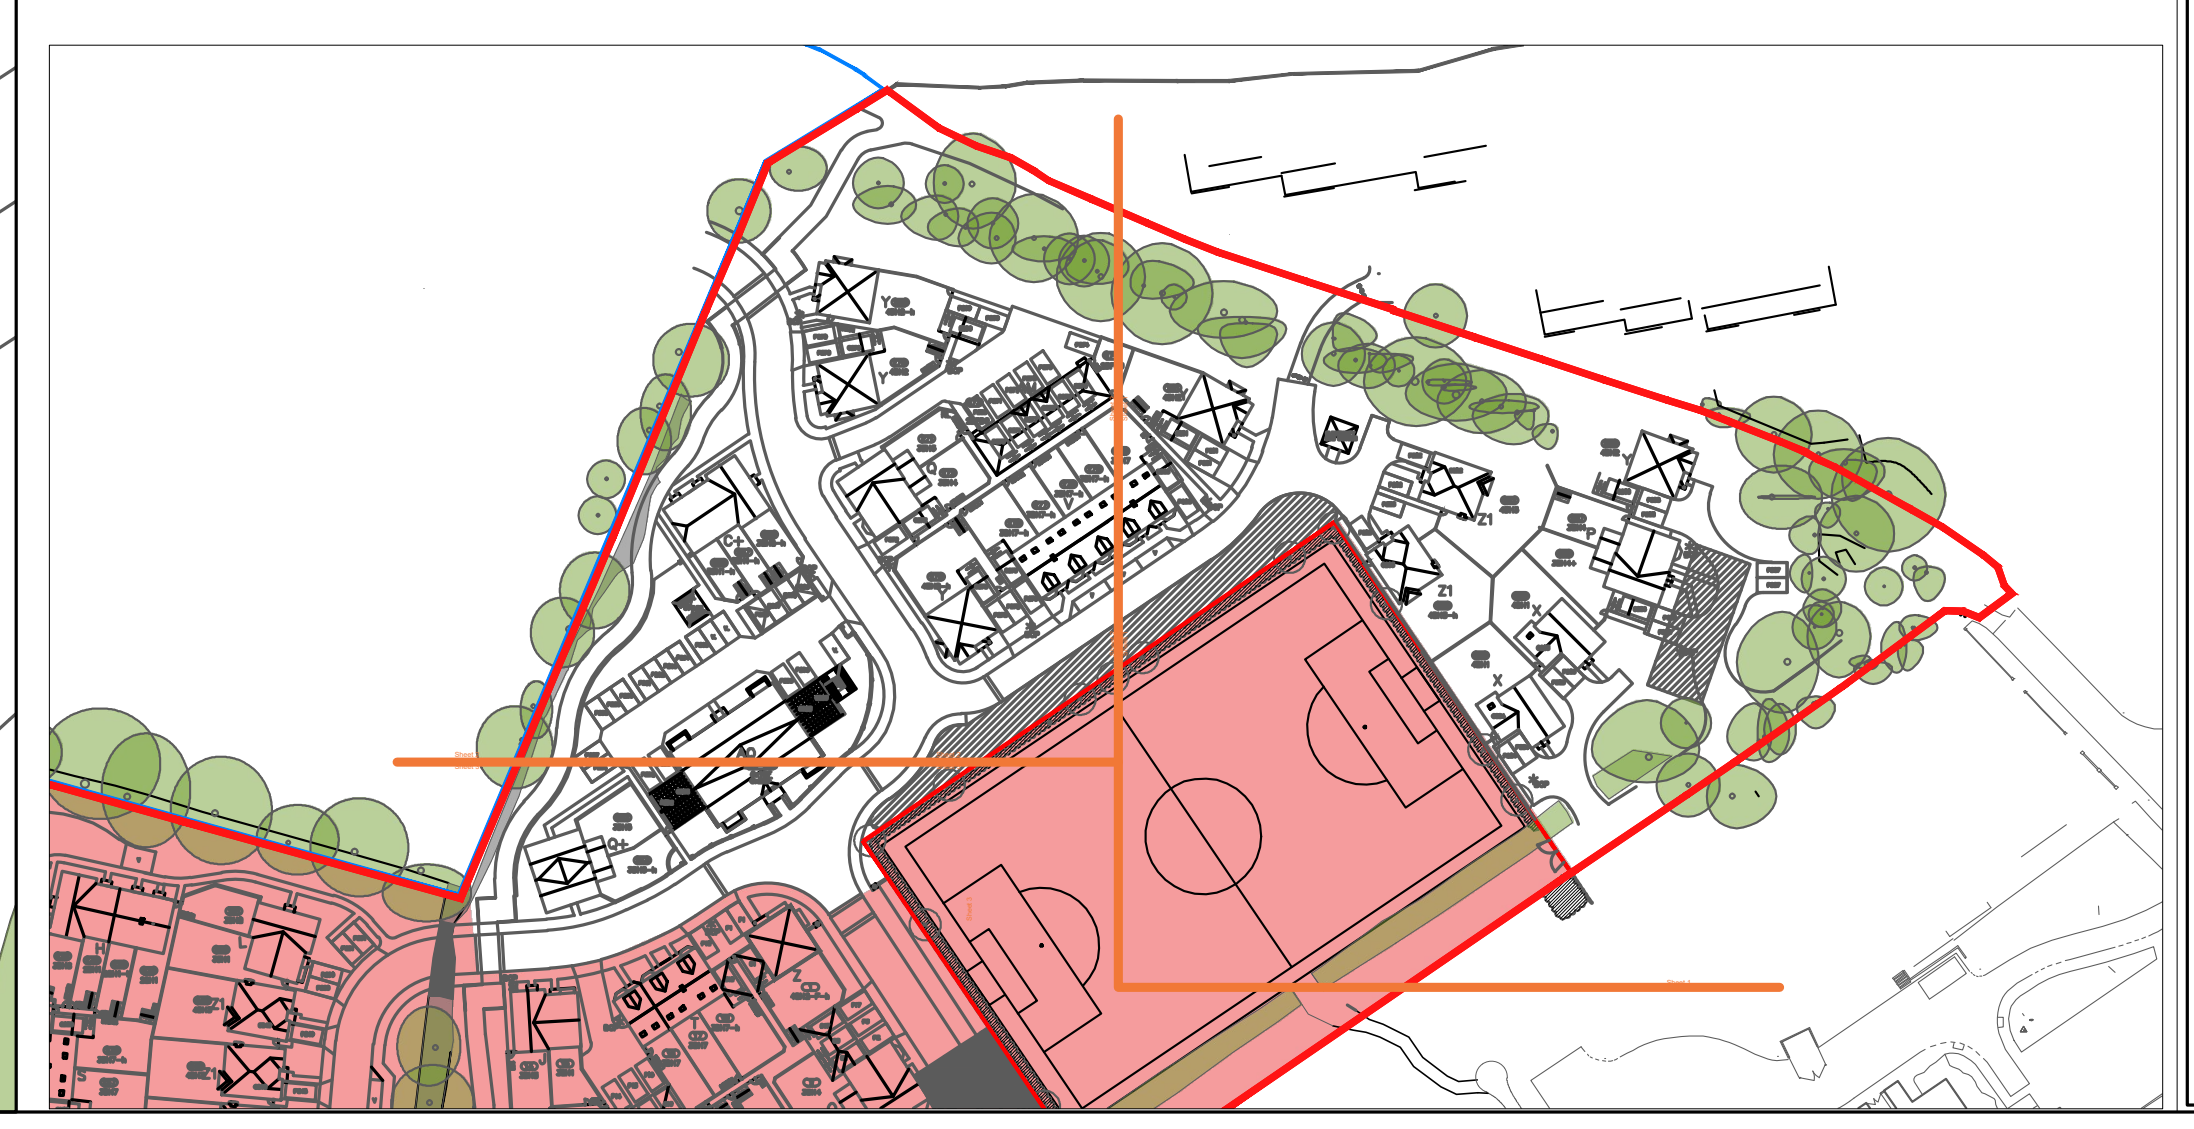

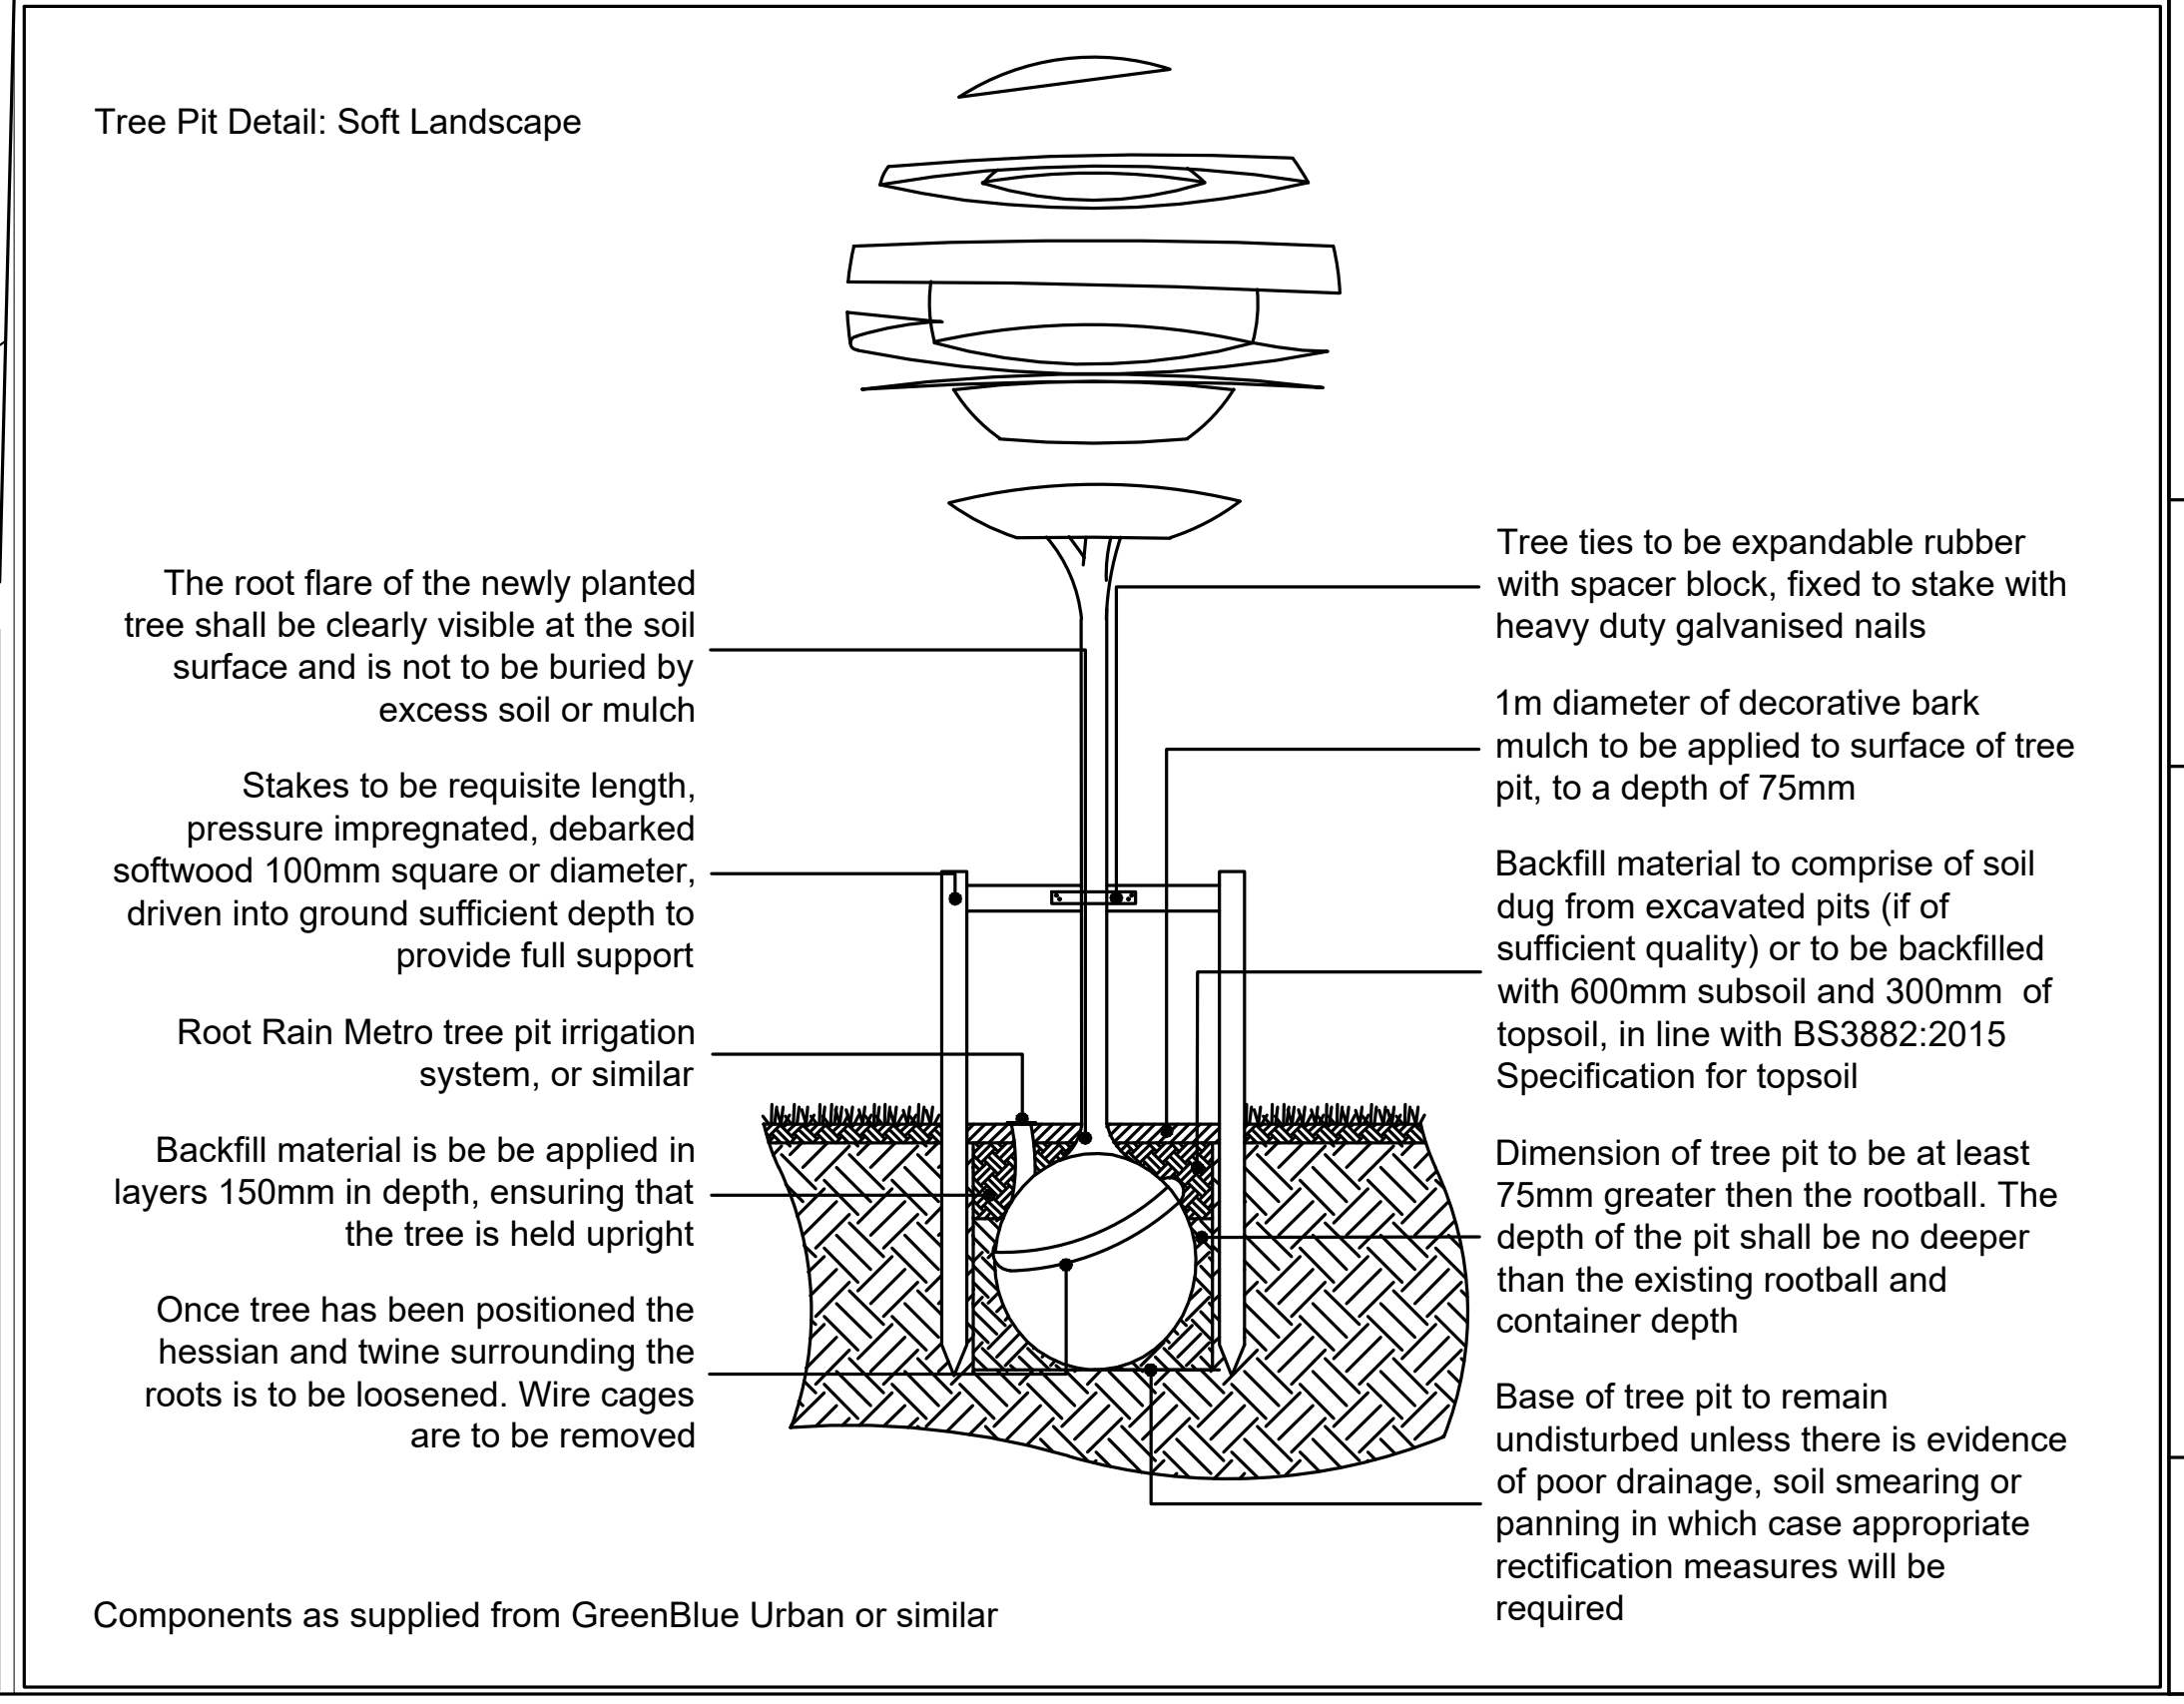
Tree Pit Detail: Soft Landscape
The root flare of the newly planted tree shall be clearly visible at the soil surface and is not to be buried by excess soil or mulch
Stakes to be requisite length, pressure impregnated, debarked softwood 100mm square or diameter, driven into ground sufficient depth to provide full support
Root Rain Metro tree pit irrigation system, or similar
Backfill material is be be applied in layers 150mm in depth, ensuring that the tree is held upright
Once tree has been positioned the hessian and twine surrounding the roots is to be loosened. Wire cages are to be removed
Tree ties to be expandable rubber with spacer block, fixed to stake with heavy duty galvanised nails
1m diameter of decorative bark mulch to be applied to surface of tree pit, to a depth of 75mm
Backfill material to comprise of soil dug from excavated pits (if of sufficient quality) or to be backfilled with 600mm subsoil and 300mm of topsoil, in line with BS3882:2015 Specification for topsoil
Dimension of tree pit to be at least 75mm greater then the rootball. The depth of the pit shall be no deeper than the existing rootball and container depth
Base of tree pit to remain undisturbed unless there is evidence of poor drainage, soil smearing or panning in which case appropriate rectification measures will be required
Components as supplied from GreenBlue Urban or similar

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTE: DO NOT SCALE FROM DRAWING

Legend

●	Existing trees to be retained and protected during construction
●	Proposed tree planting within soft landscape. See detail 2 on sheet
✱	Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
▭	Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height
🟩	Proposed shrub planting to receive 75mm bark mulch after planting operations
▨	Proposed native mix shrub planting to be planted in groups of 5-7no. of each species and as above
▒	Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
▭	Proposed grassland areas, to be retained where possible. Bare patched to be seeded with Tussock grass mixture (EG10) grass seed mix as supplied by Emorsgate Seeds and sown at 5 grams per msq, or similar and approved
▦	Proposed grassland areas, to be seeded with Meadow grass mixture for wet soils (EG8) grass seed mix as supplied by Emorsgate Seeds and sown at 5 grams per msq, or similar and approved
🟧	Cut lines

Rev	Date	Details	Drawn

ACD ENVIRONMENTAL
HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane,
Malmesbury, SN16 0ES
Tel: 01666 825646

Courtyard House, Mill Lane, Godalming, GU7 1EY
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 9SX
Tel: 02382 026300

9 Brownlow Road, Cambridge, CB4 3NG
Tel: 07825 868654

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

Linden HOMES

scheme: Woodcroft Farm, Lovedean
client: Linden Homes
drawing: Landscape Proposals Phase 1A
date: February 2018
scale: 1:200@A1
drawing no: LIN21652 11 Sheet 3
drawn: DC checked: AE

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted: 2011. Copyright of this plan remains with ACD until all fees have been paid in full.