



Contact:
Project arboriculturalist is Sarah Kiss, HCC - 07718 146 759.

If you are in doubt about ANY tree related matters, contact HCC arb on arbconsult@hants.gov.uk.
IF you see any tree damage please advise as soon as possible.

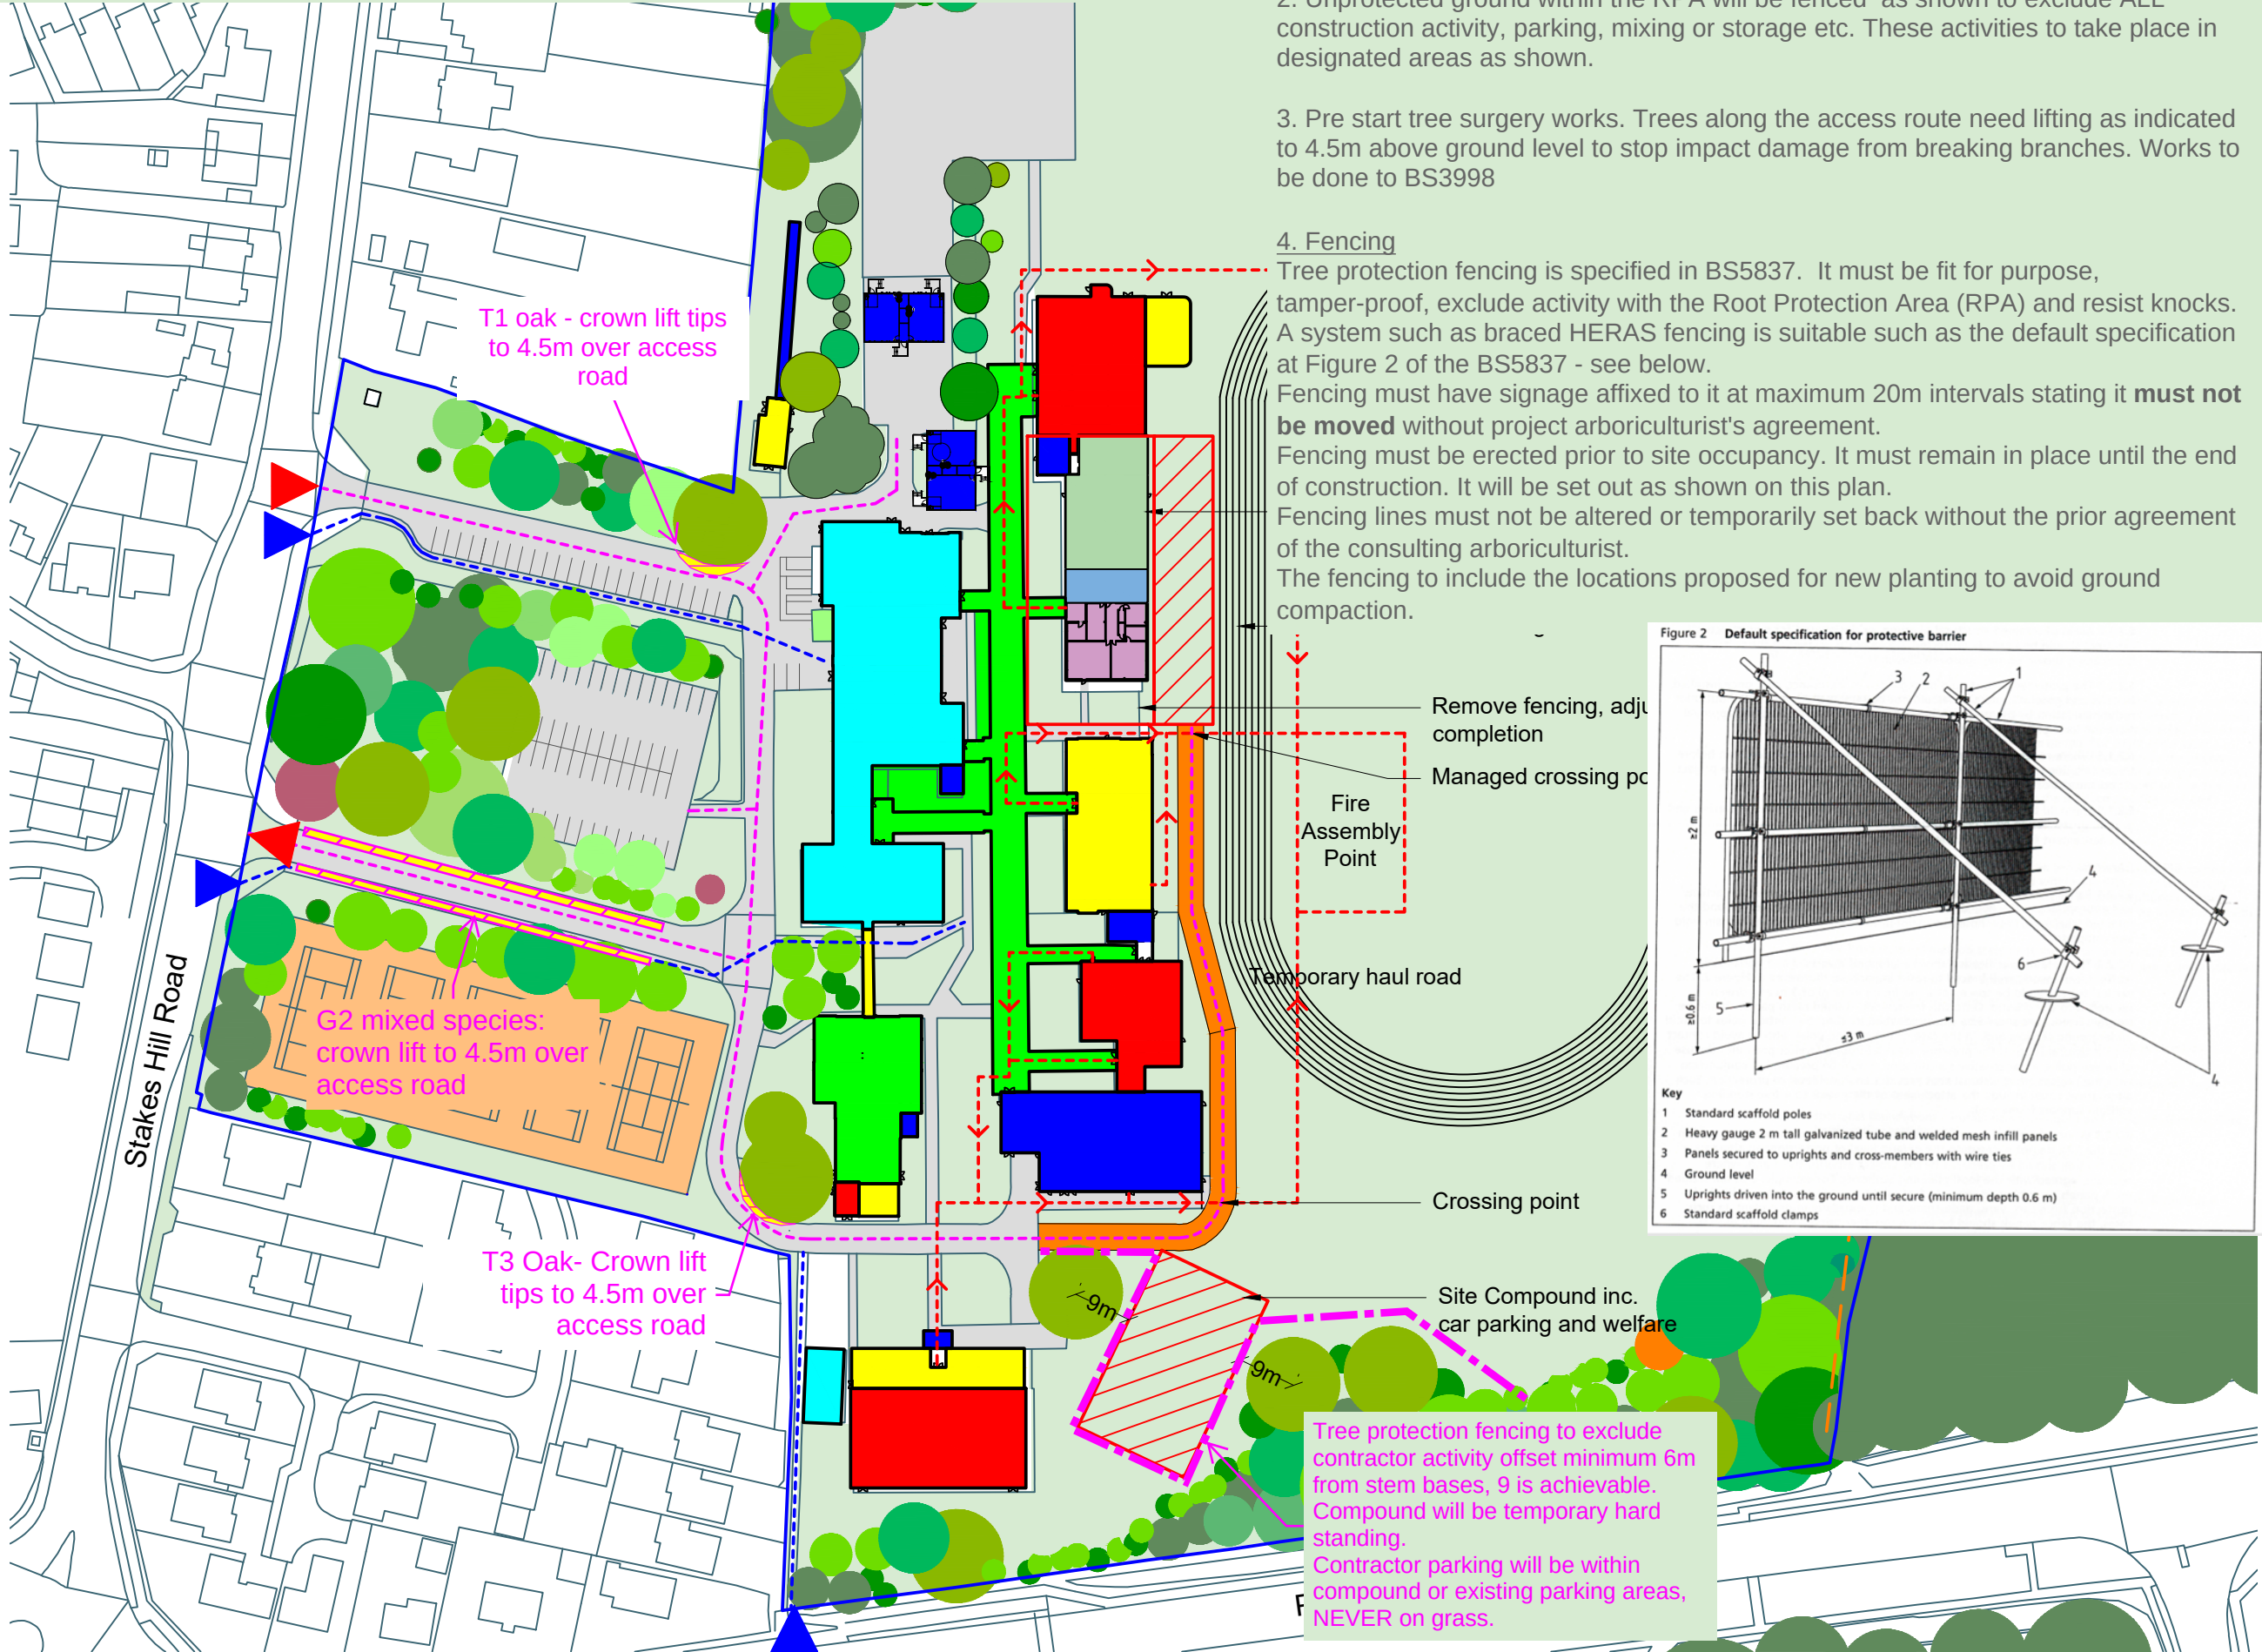

Arboricultural Method statement

1. Construction activities must take place from existing hard standing or from protected ground only.
2. Unprotected ground within the RPA will be fenced as shown to exclude ALL construction activity, parking, mixing or storage etc. These activities to take place in designated areas as shown.
3. Pre start tree surgery works. Trees along the access route need lifting as indicated to 4.5m above ground level to stop impact damage from breaking branches. Works to be done to BS3998
4. Fencing
Tree protection fencing is specified in BS5837. It must be fit for purpose, tamper-proof, exclude activity with the Root Protection Area (RPA) and resist knocks. A system such as braced HERAS fencing is suitable such as the default specification at Figure 2 of the BS5837 - see below. Fencing must have signage affixed to it at maximum 20m intervals stating it **must not be moved** without project arboriculturalist's agreement. Fencing must be erected prior to site occupancy. It must remain in place until the end of construction. It will be set out as shown on this plan. Fencing lines must not be altered or temporarily set back without the prior agreement of the consulting arboriculturalist. The fencing to include the locations proposed for new planting to avoid ground compaction.

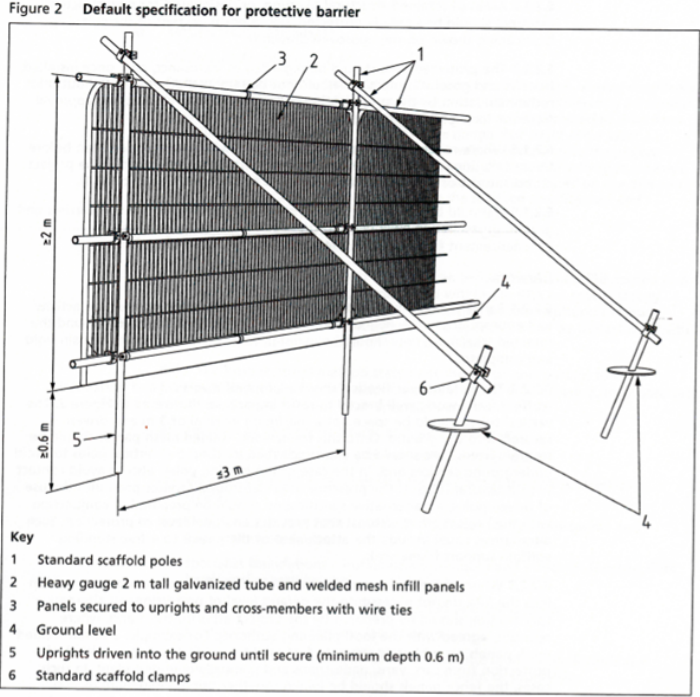

General Notes

1. This drawing is © copyright Hampshire County Council 2023. No unauthorised reproduction of any kind is permitted.
2. No dimensions to be scaled from this drawing. Verify all dimensions prior to construction. Immediately report any discrepancies on the document to the Architect/Contract Administrator. This document shall be read in conjunction with associated models, specifications and related consultant's documents.
3. Drawing to be read with all relevant Architectural, Interiors, Structural, M&E, Drainage/Public Health, Landscape, Civils and Interiors drawings and specifications.
4. This map is reproduced from Ordnance Survey material with the permission of Ordnance Survey on behalf of the controller of Her Majesty's Stationery Office © Crown copyright. Unauthorised reproduction infringes Crown Copyright & may lead to prosecution or civil proceedings (100019180) 2023.

Hampshire County Council

- Notes:
- Phase 1 - Temporary Building Jun/Jul 2024
 - Phase 2 - Temporary Road Jun/Jul 2024
 - Phase 3 - Compound/Scaffold Jul 2024
 - Phase 4 - Southern End Aug 2024 - Nov 2024
 - Phase 5 - Northern End Nov 2024 - Apr 2025
 - Staircase and Entrance to be combined in Phase 4 over summer holidays.
 - Vehicle Entrance/Exit
 - Pedestrian Entrance
 - Site Boundary
 - Crown lift to 4.5m over access road
 - Tree Protection fencing
 - Heras fencing to Haul Road

HCC Property Services,
Three Ministers House,
76 High Street, Winchester SO23 8UL
Tel: (01962) 947801

PROJECT NAME
Crookhorn College

SHEET NAME
Tree Protection Plan and
Arboricultural Method
Statement v2.0

DRAWING No.
project code - originator - volume - level - type - role - number version
P-NBC-CrookhornCollege-TPP&AMS-SS23611-1.0

SUITABILITY
code description
D2 SUITABLE FOR TENDER

10.05.2018