




Gifford Tree Service West Flat Fort Widley Portsdownhill Road Cosham PO6 3LS 02392325661 Mobile
07831488456 Email kim@giffordtree.com url www.giffordtree.com

Arboricultural Impact Assessment/Statement and Tree Protection Plan for the proposed development of 7 Bath Road Emsworth PO10 7EP.

1

Arboricultural Consultant: Kim Gifford 07831488456 29th April 2015

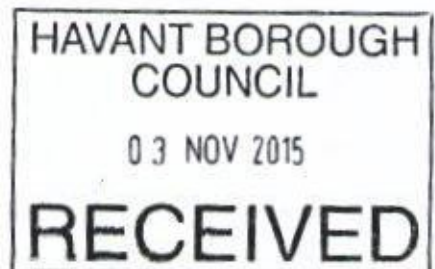

Prepared by Kim Gifford 7th April 2015

1. Arboricultural Method Statement and Impact Assessment

The proposal is to develop the property of 7 Bath Road Emsworth PO10 7EP.

The following Arboricultural method statement is to provide a protection strategy for the Silver Birch T1 in the garden of 5 Bath Road adjacent to the proposal. The tree protection plan (TPP) shows the area of proposal.

Overground Constraints:

A. The project will not impinge on the existing crown area of T1 Silver Birch.

Underground Constraints:

B. The existing garage is partially within the root protection area of T1 Silver Birch. Precautions are required during demolition and construction. Works within this area will be undertaken by hand only and the footing design will be a pile and raft specification in the RPA to minimise disruption to the root system. The RPA is measured by the radius from the trunk of T1 Silver Birch of 4.8m marked on the TPP. This specimen has sufficient vitality to sustain this minimal root loss in the proposed pile areas.


C. The project should include a structured procedure of Arboricultural supervision as the attached flow chart and these details should be available on site and conveyed to the construction contractors.



Tree Survey: Schedule

Method: Visual Tree inspection references, Principles of Tree hazard Assessment and Management by David Lonsdale and The body language of trees by Claus Mattheck and Helge Breuer. The Arboricultural Association guidance note 7 tree surveys a guide to good practice. Lantra award Professional tree inspection. BS5837: 2012 Tree in relation to design, demolition and construction recommendations. This inspection had restricted access to the tree base as it is in the neighbouring property.

- Tree Number: T1
 - Species: Silver Birch (*Betula pendula*)
 - Height: 10m
 - Stem diameter: 400mm
 - Crown spreads: N3m E3m S3m W3m
 - Clearance: 2m>
 - Root Protection Radius: 4.8m (as Annex D BS 5837:2012 table)
 - RPA m2 = 72m squared
 - Age Class: Mature
 - Physiological Condition: Normal
 - Structural Condition: Normal
 - Estimate Life expectancy: 20>
 - BS5837 Category: C
- Recommendation: Continue to maintain previous pruning regime.

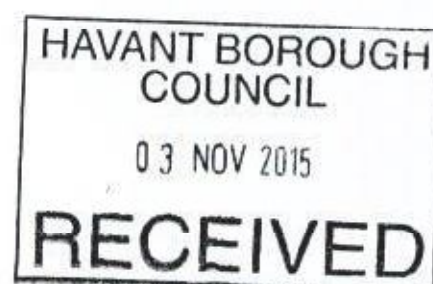

Contacts:

1. Local Authority Arboricultural officer
2. Site Agent
3. Appointed arboriculturist

No contractors have been appointed at this stage. If there is a need to review any of the protection plans/method statements in light of additional requirements identified by contractors, written approval for any such modifications will be obtained from the LPA prior to commencement of any work.

1.1 Specific Methods to be applied during all operations.

1.1.1 The methodology of the tree protection measures follows a logical sequence of development events. Variations to the sequence could significantly reduce the efficiency of the tree protection measures. Variations to the proposed development will require input prior to commencement of the variations, from the appointed arboriculturist and/or the LPA Arboricultural officer.

1.1.2 The LPA will be given notice in writing 5 full working days prior to the date of commencement of development to check all tree protection in place.

1.1.3 All development works within the RPA of any retained tree will be carried out strictly in accordance with the Arboricultural method statement.

1.1.4 It is recommended that works within the RPA, as well as the installation & modification of all tree protection measures, are carried out under supervision by an arboriculturist. It is the responsibility of the client to appoint an arboriculturist prior to commencement of works. Details of the appointed arboriculturist will be forwarded to the LPA.



1.1.5 A schedule of activities that will require Arboricultural supervision at various stages has been produced. This should form the minimum site attendance by the appointed arboriculturist, as well as the Local Authority tree officer (where relevant).

1.1.6 Periodic reports, along with supporting evidence, will be submitted to the LPA on the tree protection measures, as well as the results of activities within the RPAs of retained trees.

1.2 Preliminary tree maintenance.

1.2.1 Prior to carrying out any tree work, all trees recommended for tree work/removal including their immediately adjacent trees, will be inspected for bird nests (wholly and partially built ones). In the event nests are found, the tree work will not be carried out until the trees are found to be free of the nesting birds & their young. This is a requirement under the Wildlife & Countryside Act 1981 & The Countryside & Rights Of Way Act 2000.

1.2.2 All tree work will be carried out in accordance with BS3998:2010 & will be carried out without harming the adjacent retained trees.

1.3 Preliminary vegetation control.

1.3. Remove all vegetation over the surface of the site

by hand only in root protection area.

1.4 Preliminary tree protection methods.

Prior to development, the following measures will be carried out:

5

Arboricultural Consultant: Kim Gifford 07831468456 29th April 2015



1.4.1 All / any preliminary tree work should be carried out in a way that does not damage the retained trees and/or their rooting mediums and/or their roots see T6 London plane recommendation in schedule.

1.4.2 Protective fencing of the type shown in the protection plan will be placed in the positions indicated on the protection plan. Note that these plans are to scale and can be scaled off. The fencing will be permanently fixed to the ground as shown in the plans, or fixed to a permanent feature. Weatherproof signs will be attached to the fencing, stating their purpose and that they should not be moved. The protective fencing will delimit a construction exclusion zone and will be considered immovable. The positioning & installation of the protective fencing will be supervised by the appointed arboriculturist.

1.4.3 If necessary ground protection of the type specified in the protection plan will be placed in the positions shown on the plan. The type specified will be determined by the assumed load expected. Any loading in excess of 1t will require the use of heavy duty ground protection, as indicated. This will be supervised by the appointed arboriculturist.

1.4.4 Prior to commencing work on site, all contractors will be given an induction on the tree protection measures employed during the development project and on the potential consequences of disregarding them (pre-commencement meeting).

1.5 Arboricultural Methods and restrictions during all phases of development:

The following general tree protection measures will be adopted throughout the life of the development:

1.5.1 The fencing comprising the construction exclusion zone will not be moved, except if specified in the tree protection plans. All staff on site will understand the need for protective fencing, as well as any ground protection and to keep strictly within the designated access routes, when moving in/out the site.

1.5.2 Protective fencing will be maintained & inspected on a weekly basis by the site manager. Inspections will be recorded on an inspection form.

1.5.3 All damage to protective fencing or accidental damage to trees will be reported to the site manager immediately. Works occurring within the incident vicinity will cease immediately until adequate tree protection measures are re-established. A record of the damage will be made by the site manager and, in consultation with the appointed Arboricultural consultant, remediation measures carried out.



1.5.4 No materials and/or plant will be stored within the designated root protection area of any of the trees and/or within the delimited construction exclusion areas. Any liquid materials to be stored on site, will be located where, in any event of spillage, will allow for natural run-off to be away from the designated root protection areas and buffer zones and/or stored within a pre-constructed spillage containment area.

1.5.5 The mixing of concrete and mortar will be performed outside any root protection areas, in such an area where in the event of any spills, any liquid will drain away from the root protection areas and any buffer zones and/or within a pre-constructed spillage containment area.

1.5.6 The use and movement of any cranes/heavy lifting arms/digger arms and booms of delivery vehicles will be carried out without damage to any part of the retained trees.

1.5.7 No dry construction materials will be stored within the RPAs of the retained trees, unless adequate ground protection (approved by the appointed arboriculturist), has been installed within the storage area.

1.5.8 No soil, demolition debris, or any other arisings will be stored within the RPAs or under canopies of the retained trees, whichever is the greater.

1.5.9 No ground level changes will occur (no grading/levelling/raising), within any RPAs of the retained trees, unless consented to by the LPA & supervised by the appointed arboriculturist. Changes to the ground levels within RPAs of retained trees will follow the advice of the appointed arboriculturist.

1.5.10 No additional tree work will be carried out unless consented to in writing by the LPA.

1.5.11 the positions of all site welfare & storage areas will also be located outside any canopy areas & RPAs of any retained trees.

1.5.12 No fires will be lit within 20 metres of any RPAs or canopies of retained trees, whichever is the greater

1.5.13 for the purposes of this method statement, significant roots referred to, constitute individual roots of diameters of 25mm and above, as well as dense fibrous root masses. The significance of both will be determined by an appointed arboriculturist upon discovery of either.



1.5.14 If roots 20mm and smaller in diameter are damaged that belong to retained trees, these should be cut cleanly and covered in damp Hessian or soil. If roots 25mm and larger are damaged or if a large number of smaller roots are damaged, these should be covered in damp Hessian or soil & advice should be sought from the appointed arboriculturist prior to treating them.

1.6 Demolition/Preparation:

1.6.1 A pre-commencement site meeting will be carried out by all involved in the construction & the supervising arboriculturist, to clarify tree protection measures.

1.6.2 Tree protection measures will have been installed prior to any commencement of demolition site preparation.

1.6.3 No plant machinery will encroach on the RPA of the retained trees, unless the ground is adequately protected & the machinery is incapable of striking the canopy or tree stem. If plant machinery is to encroach on protected RPAs of retained trees, this will be supervised by the appointed arboriculturist.

1.6.4 The protective fencing in the site (protecting trees), will be retained in situ until landscaping operations are to be undertaken. This will provide additional protection for the Root Protection Areas.

1.6.5 Debris from any preparation work will not be stored within any RPAs of retained trees at any time.

1.7 Construction:

1.7.1 The tree protection measures will be retained in the positions specified on the Protection Plan.

Structure foundations within RPAs:

1.7.3 The foundations for the proposed do not encroach on the RPAs. If roots are encountered, these will be cut cleanly. Excavations in this area will be supervised by the appointed arboriculturist.

1.7.4 Impermeable membranes will be used when pouring concrete for foundations, to avoid contamination of the soil & damage to any tree roots by wet cement, particularly within the RPAs of the retained trees.



Underground services:

1.7.5 The excavations for any underground services will (where possible) be routed outside any RPAs. If it is unavoidable that underground services be run inside RPAs, then the trenches for them will be excavated by hand or air-spade. Any roots that span the trench during digging will not be cut, but will have damp Hessian sacking placed around them. Damaged roots of up to 2cm diam will, where possible, be cut cleanly and covered. Any substantial roots (larger than 25mm diam), that become damaged or need to be removed, advice will first be sought from the supervising arboriculturist prior to any work being carried out on them. This will be carried out under Arboricultural supervision.

1.7.6 If and when installing infrastructure for underground services, they will be done by hand within any RPA and care will be taken not to damage the exposed roots. Back-fill within an RPA will not be compacted and will possess the same soil profile as the surrounding soil. If there is a need to compact Backfill, in preparation for the reinstatement and/or installation of infrastructure within an RPA, then CU structural soil will be used as Backfill.

1.7.7 The timing of any excavations for underground services will coincide with the arrival of materials to be used for the construction of the underground services, to minimise the time that roots are exposed. Roots will not be left exposed for more than 24 hours.

1.8 Landscaping:

1.8.1 Landscaping operations will commence only when all main construction work has ceased. The protective fencing will be removed immediately prior to commencing these operations.

1.8.2 No soil lowering will occur within the RPAs of the retained trees.

1.8.3 The existing soil levels will not be raised by more than 150mm within RPAs of retained trees without seeking advice from the appointed Arboricultural consultant.

1.8.4 Excavations for planting within RPAs of retained trees will be carried out by hand only. The same will apply for introduction of topsoil, plant transport & mulching.

1.8.5 All landscaping work within RPAs of retained trees will also be carried out by hand only.



Footpaths/hard surfaces:

1.8.6 Any exposed roots will be covered with damp Hessian. Debris from the excavation will not be stored in this area but will be immediately removed from the RPA.

1.8.7 General purpose topsoil to BS3882:2007 will be used to replace the previous hard surface. N/A

1.8.8 The proposed building will not impinge on the RPA of T6 London plane.

Boundary treatments within RPAs:

1.8.9 Where new boundary fences are proposed to be installed within the RPAs of retained trees, this will be carried out using hand tools only. Excavations will be undertaken using hand tools only at proposed fence post locations to confirm the existence of significant or insignificant roots. If significant roots are found, then an alternate location will be sought using the same method.

1.9 Post-development tree Care and amelioration

1.9.1 Once all construction & landscaping activities have been completed, any remaining ground protection/protective fencing will be removed.

1.9.2 A detailed visual inspection of the retained trees on the site & their RPAs, will be carried out, to check for signs of development damage to both the trees and their rooting environment.

Appropriate remedial tree / soil work will then be recommended by an arboriculturist.

1.9.3 Any damaged branches will be removed or pruned cleanly in line with current good Arboricultural practice (BS3998:2010) and any specific Arboricultural advice. Any other remedial work will also be carried out as & when recommended.



1.9.4 An annual tree inspection regime will be implemented to monitor the health of the retained & replaced trees for an agreed period after the development project is complete. The appointed arboriculturist will provide reports to the client & the local authority tree officer at agreed times, on the condition of the retained trees & any remediation work recommended.


2. Site Supervision

BS5837:2012 recommends site supervision at regular intervals & many local authorities are requesting detailed schedules for site supervision, as well as the details of the supervising arboriculturist.

If the above is required by the LPA, the appended table indicates when attendance by an arboriculturist for the site should occur, to ensure appropriate tree protection.

This concludes the method statement.

Kim Gifford Arboricultural Consultant.

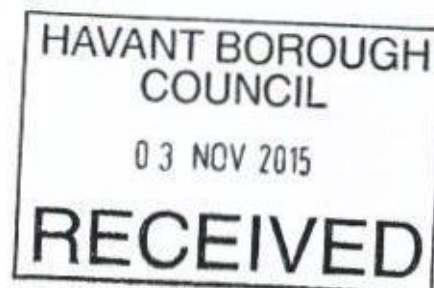

Supervision schedule

	Pre-development & preparation	During construction	During Landscaping	Post-construction
Site attendance by arboriculturist needed	1. Site meeting with all involved in the Development project	1. Site meeting with all involved in the Development project	1. Monitoring the removal of the existing hard surface within the RPA of trees	1. Visual inspection of trees within RPAs of retained trees to identify any construction related damage
	2. Supervising the initial construction & positioning of protective fencing &	2. Monitoring the excavations within the RPA of trees	2. Monitoring the introduction of new topsoil in to the RPA of trees	2. Submission of final report to LPA
	3. Periodic site visits to check integrity of protection measures	3. Supervising the installation of any underground services within the RPA of	3. Periodic site visits to check integrity of protection measures	
	4. Submission of report to LPA	4. Periodic site visits to check integrity of protection measures		
		5. Submission of report to LPA		

HAVANT BOROUGH
COUNCIL
03 NOV 2015
RECEIVED



BLOCK PLAN
AREA 90m x 90m
SCALE 1:500 on A4
CENTRE COORDINATES: 474736, 105783



Root Protection Area
4.80m radius 72sqm
Area details to be
read in conjunction
with Arboricultural
Report 28/04/2015
Kim Gifford
Arboricultural
Consultant
07831488456
kim@treetesting.com



SUPPLIED BY Streetwise Maps Ltd
www.streetwise.net
Licence No: 100047474
10/09/2014 09:06:04

HAVANT BOROUGH
COUNCIL

03 NOV 2015

RECEIVED

Proposed new garage 7 Bath Road
Emsworth PO10 7EP
Site plan 1:500 Drg 14/280/5 03 09 14