


Schedule of proposed works for Grainger Development site, land west of London
Road, Waterloooville. (06/09/13)
(Our file ref: 13243-Twap-Info-DC)


Tree No	Species	Description of proposed work	Reasons for carrying out the proposed work
1	Horse chestnut	• Crown lift to maintain a clearance above ground level of 3.5m. • Carefully reduce the longer lateral branches by up to 3m. • Carefully reduce the low lateral branch on the north east aspect overhanging the area of excavation to facilitate the sewer connection by up to 4m back to a suitable growth point. • Carry out excavation within a section of the Root Protection Area in order to facilitate the sewer connection. This work will be carried out under full arboricultural supervision. The machine will work on boards laid either side of the trench to protect the ground and prevent compaction. The spoil will be laid onto boards either side of the trench to avoid damage to the ground. The trench will be backfilled using clean topsoil for the top 500mm of the trench to encourage root regeneration.	• The tree has a number of long lateral branches which are at risk of failure; the reduction will reduce this risk to an acceptable level. In addition, the reduction of the specific branches on the North West aspect will allow adequate clearance to allow the works required to connect the sewer.
Group 2	Goat willow, ash	• Closely spaced group of poor quality goat willow and ash. Several stems from ground level with no potential to improve.	• Their removal is required to facilitate the sewer connection associated to the Grainger development.

Location plan and tree numbering plan. Plans BT1 and BT2 enclosed

BT1

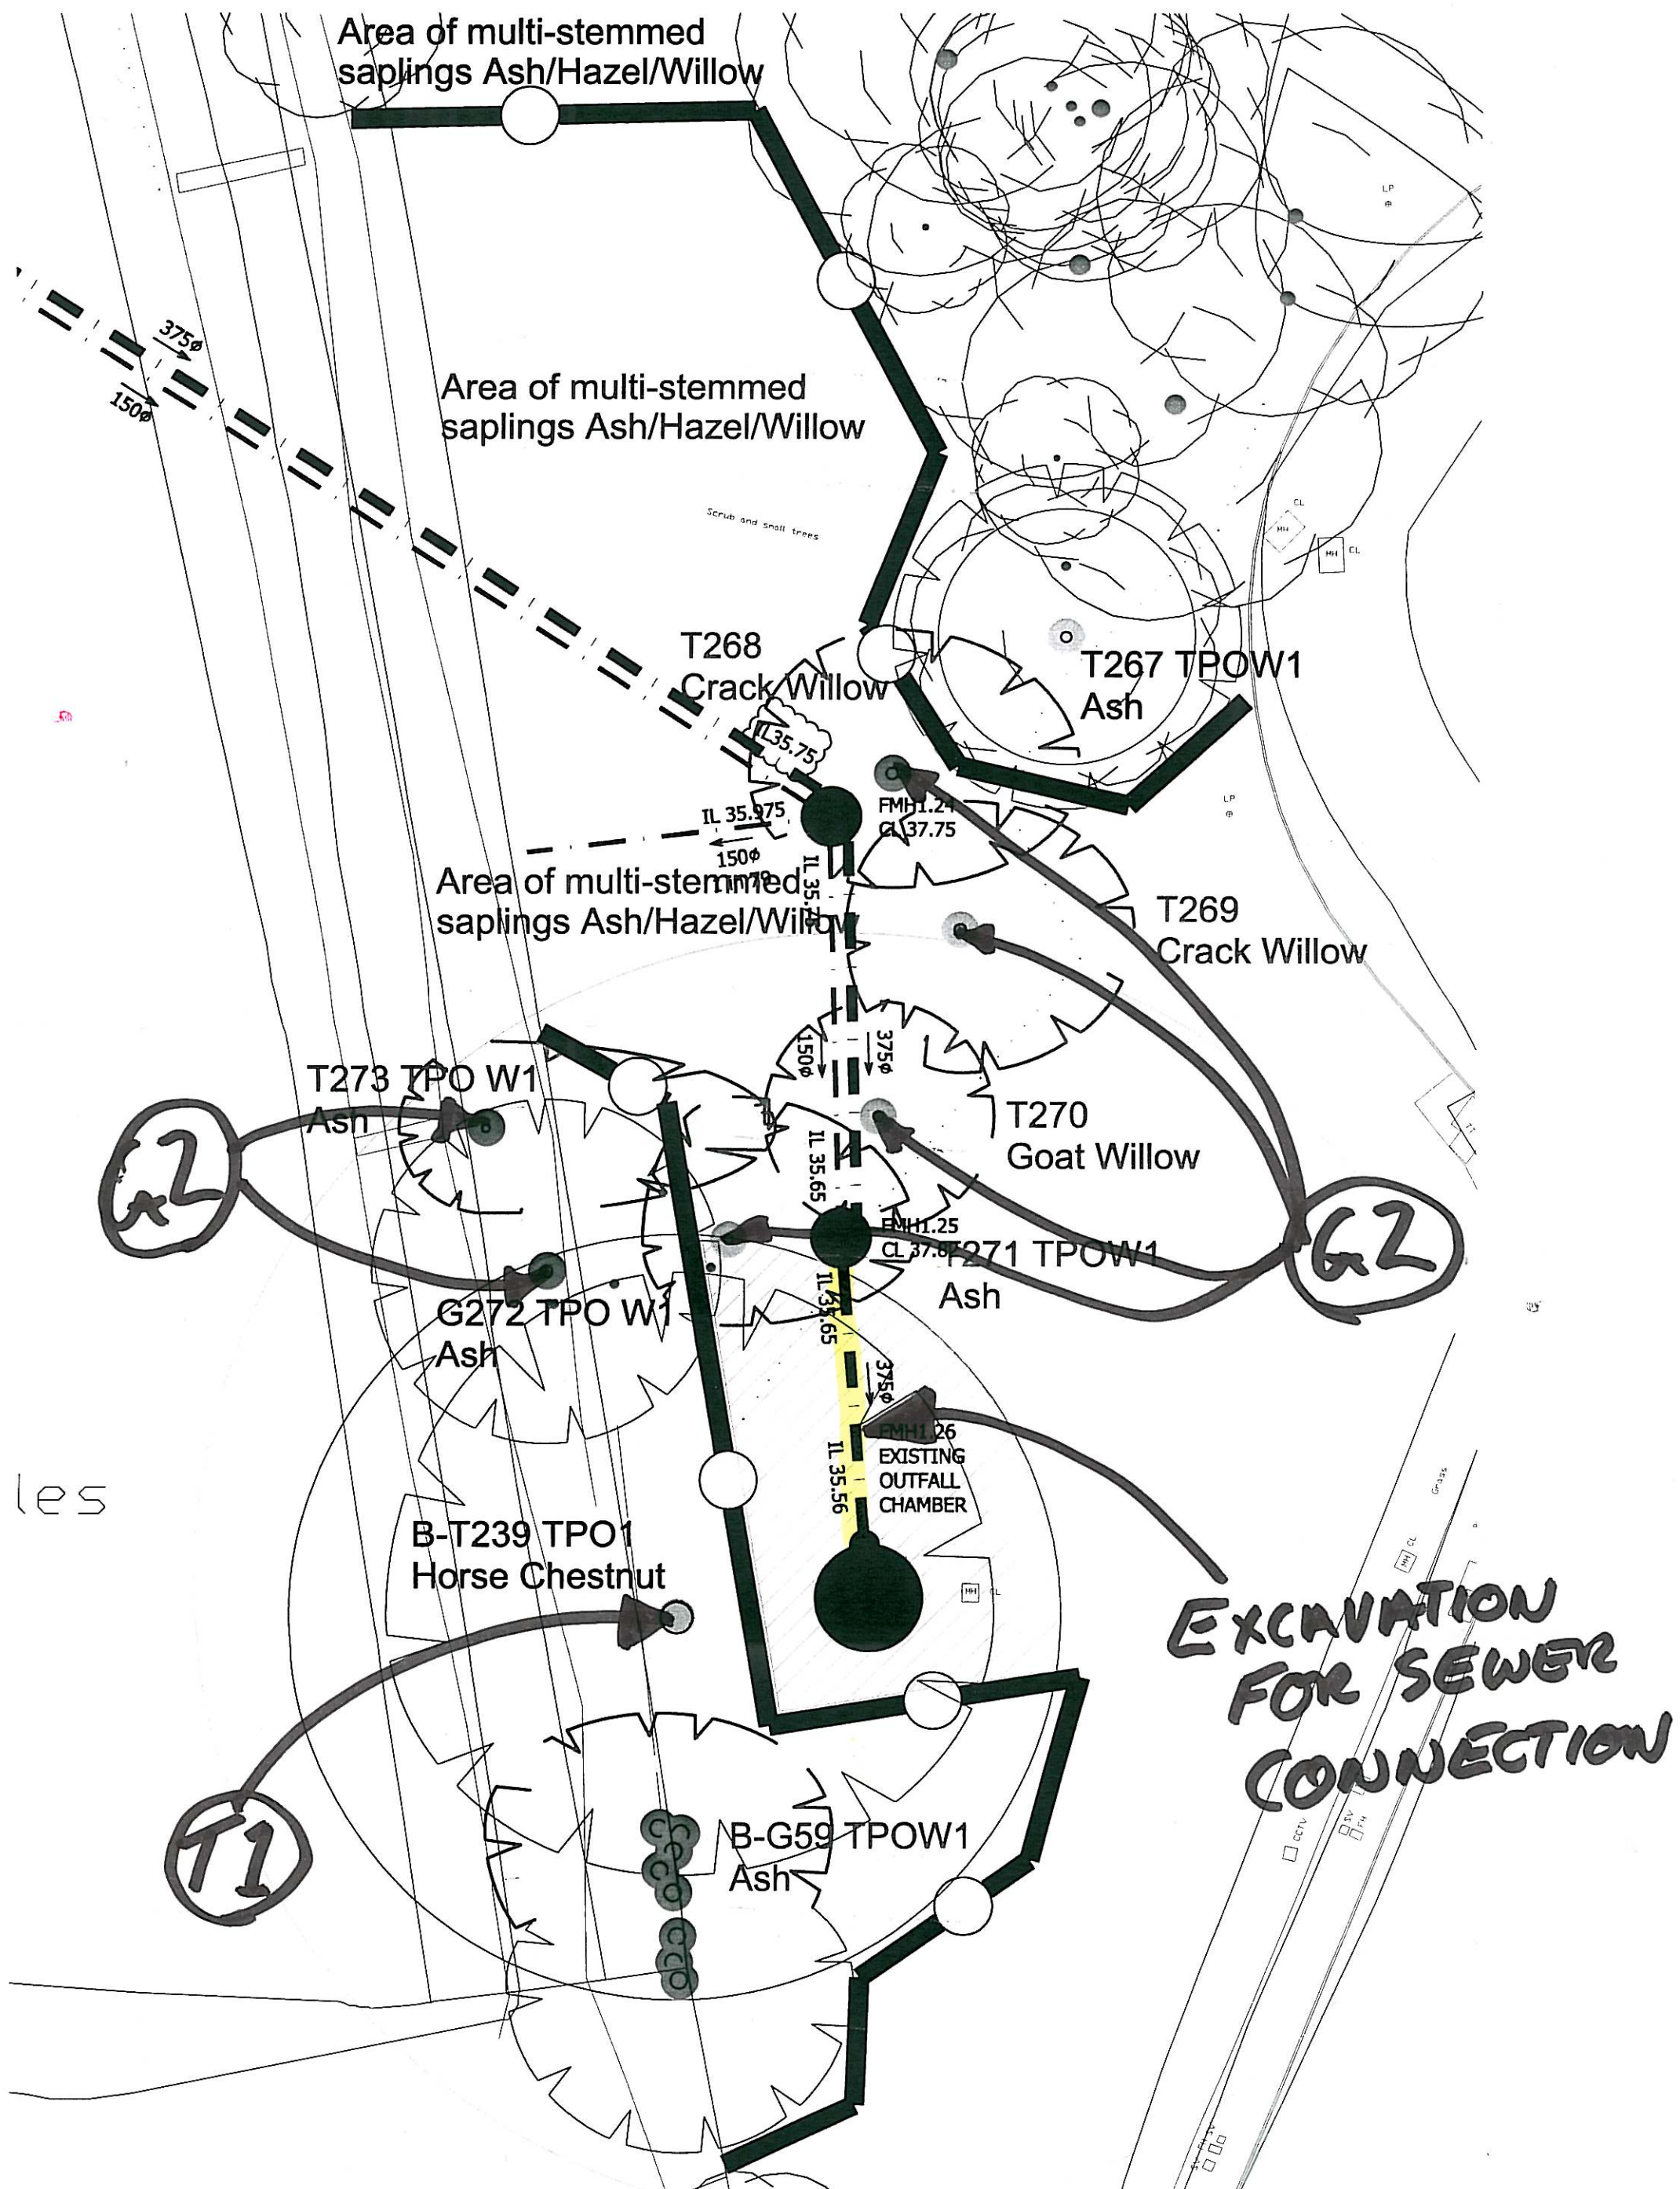

BT2

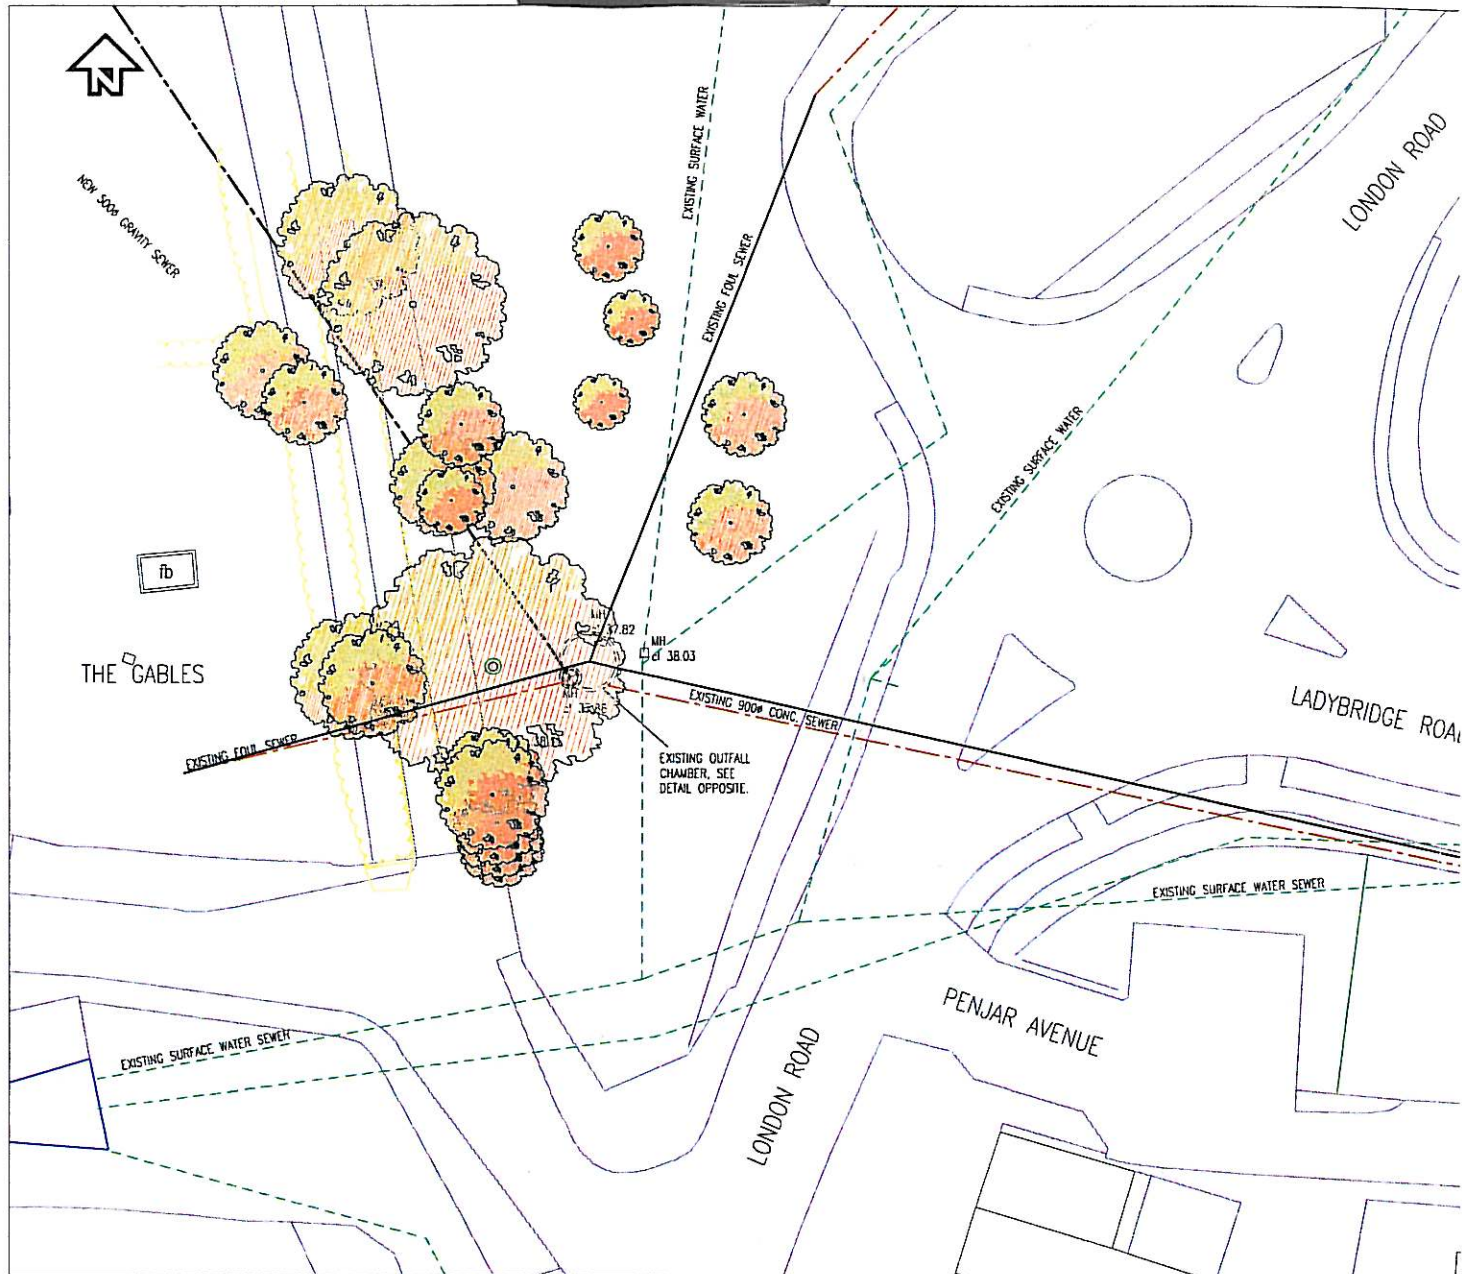

LOCATION PLAN
SCALE 1:250

Scale 1:250 0m 10m 20m