

Please read these instructions before installation and retain for future reference

NITELED™ DOME BOLLARD

Louvred Circular Bollards

Light Source: LED
Total Circuit Wattage: 8.5W
Cap: Integral
Colour Temp: 4000K
Ra: 80

Stainless Steel Construction

JC39422SS

Total Height: 475mm

JC39423SS

Total Height: 775mm

220-240V~ 50/60Hz / Class I

Class I products must always be earthed

Blue — [Symbol] — Neutral: Blue
Green/Yellow — [Symbol] — Green/Yellow
Brown — [Symbol] — Live: Brown

CE IP44 0.3m

BS EN ISO9001 - 2008
Registered Firm Certificate No. GB 1552
Drg No. JC39422SS-IS Issue: E - 14.06.16 - KB

Important Information

It is recommended that luminaires are installed by a qualified electrician who should ensure the installation complies with the current IEE wiring regulations BS7671: 2008.

Any broken or damaged parts should be replaced as soon as possible.
JCC will not accept responsibility for any claims arising from a sub-standard installation.

Important User Advice

Always switch off mains supply before fitting or servicing.
This luminaire is suitable for indoor and outdoor use.


Installation Notes

Ensure fixing surface is flat and even. Use optional mounting kit JC39224 (available separately).


Do not install in areas that are near to continual running water or prone to flooding.

Installation Procedure

- 1) Select a suitable location for the bollard and dig a hole large enough to accept the Root Mounting Kit.(if required)
- 2) Assemble the kit.
- 3) Create a solid base at the bottom of the hole using hardcore, shingle or densely packed soil. Ensure the Top Plate is set square with ground level.
- 4) Pass the power cable through the hole in the Top Plate; DO NOT dress it around the edge of the plate.
- 5) Fill the locating hole in such a way as to secure the Root Kit securely in place.
- 6) Place the luminaire over the mounting kit and secure in place with washers and castlenuts.
- 7) Alternatively a concrete pad stone can be used to secure the bollard 300 x 300 mm minimum.

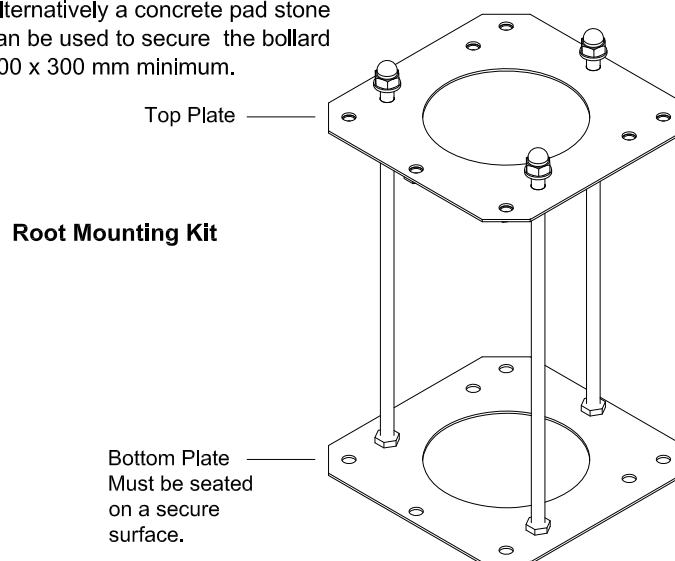

Profile & Dimensions

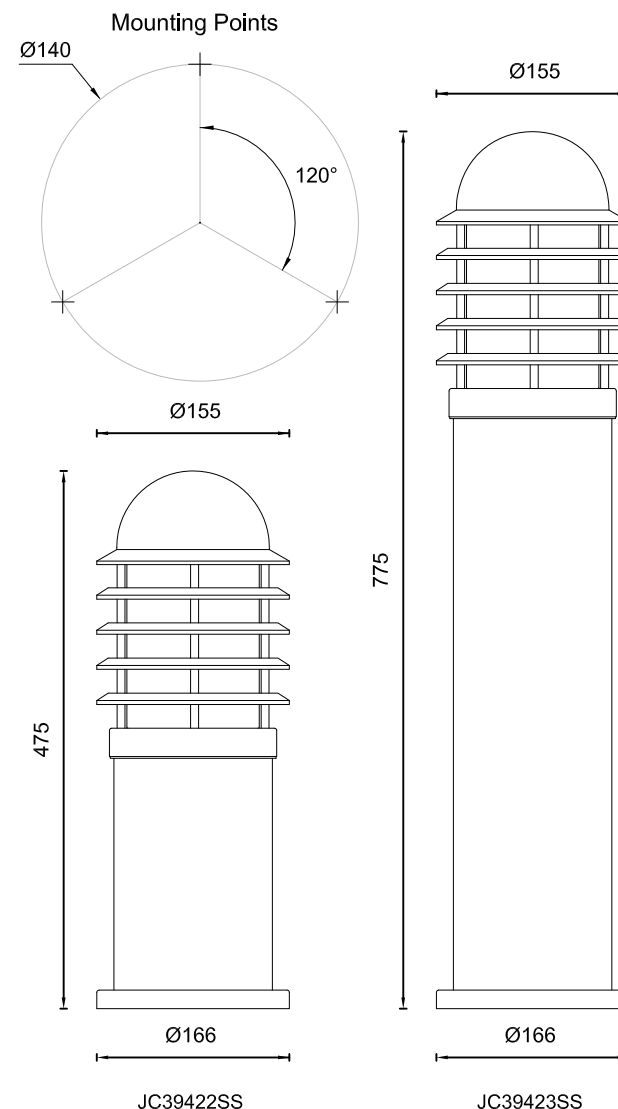

General Maintenance Requirements

JCC Lighting Products would recommend that the following maintenance is performed in order to prolong the life of this product:
During installation, and then bi-annually, grease or lubricate removable fixings, thus ensuring future maintenance is trouble free.
Clean Luminaire with warm water to remove any surface deposits.
Do not use abrasive cleaners.

jcc.co.uk