







Contract: Harts Farm Way, Havant		Client: Upton McGougan		Trial Pit: TP21	
Contract Ref: 727927	Start: 18.06.13	Ground Level	Co-ordinates: ---	Sheet: 1	of 1
End: 18.06.13					

Samples and In-situ Tests				Water	Backfill	Description of Strata	Depth (Thickness)	Material Graphic Legend
Depth	No	Type	Results					
0.00-0.50	1	B				MADE GROUND: Light brown clayey sandy angular to subrounded fine to coarse GRAVEL of chalk, flint, concrete, clinker and tarmac. Frequent cobbles of concrete and tarmac. Rare rootlets.	(0.80)	
0.20		PID	0.0ppm					
0.50-0.50	2	ES PID	0.0ppm					
0.80-1.50	3	B				Greenish grey very sandy silty subrounded to rounded fine to coarse GRAVEL of flint. Medium cobble content of flint. (HEAD GRAVEL)	(0.70)	
1.00-1.00	4	ES PID	0.0ppm					
1.50-1.50	5	B PID	0.0ppm			Light orangish cream very sandy silty angular to subrounded fine to coarse GRAVEL of flint, chert. High cobble content of flint. (HEAD GRAVEL)	1.50	
1.60-1.60	6	ES						
2.00		PID	0.0ppm				(1.90)	
2.30	7	W						
3.00		PID	0.0ppm					
Trial pit terminated at 3.40m depth.							3.40	

Plan (Not to Scale)

General Remarks

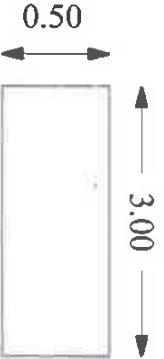

1. Pit placed near above ground tank location, tank removed with no evidence on the ground of exact location.
2. Pit collapse from 1.30m depth.
3. Groundwater at 2.30, fast inflow, north east to south west direction.
4. Backfilled with arisings on completion.

Method Used:	Machine dug	Plant Used:	JCB-3CX	Logged By:	APope	Checked By:	VS	AGS
All dimensions in metres		Scale:		1:25				