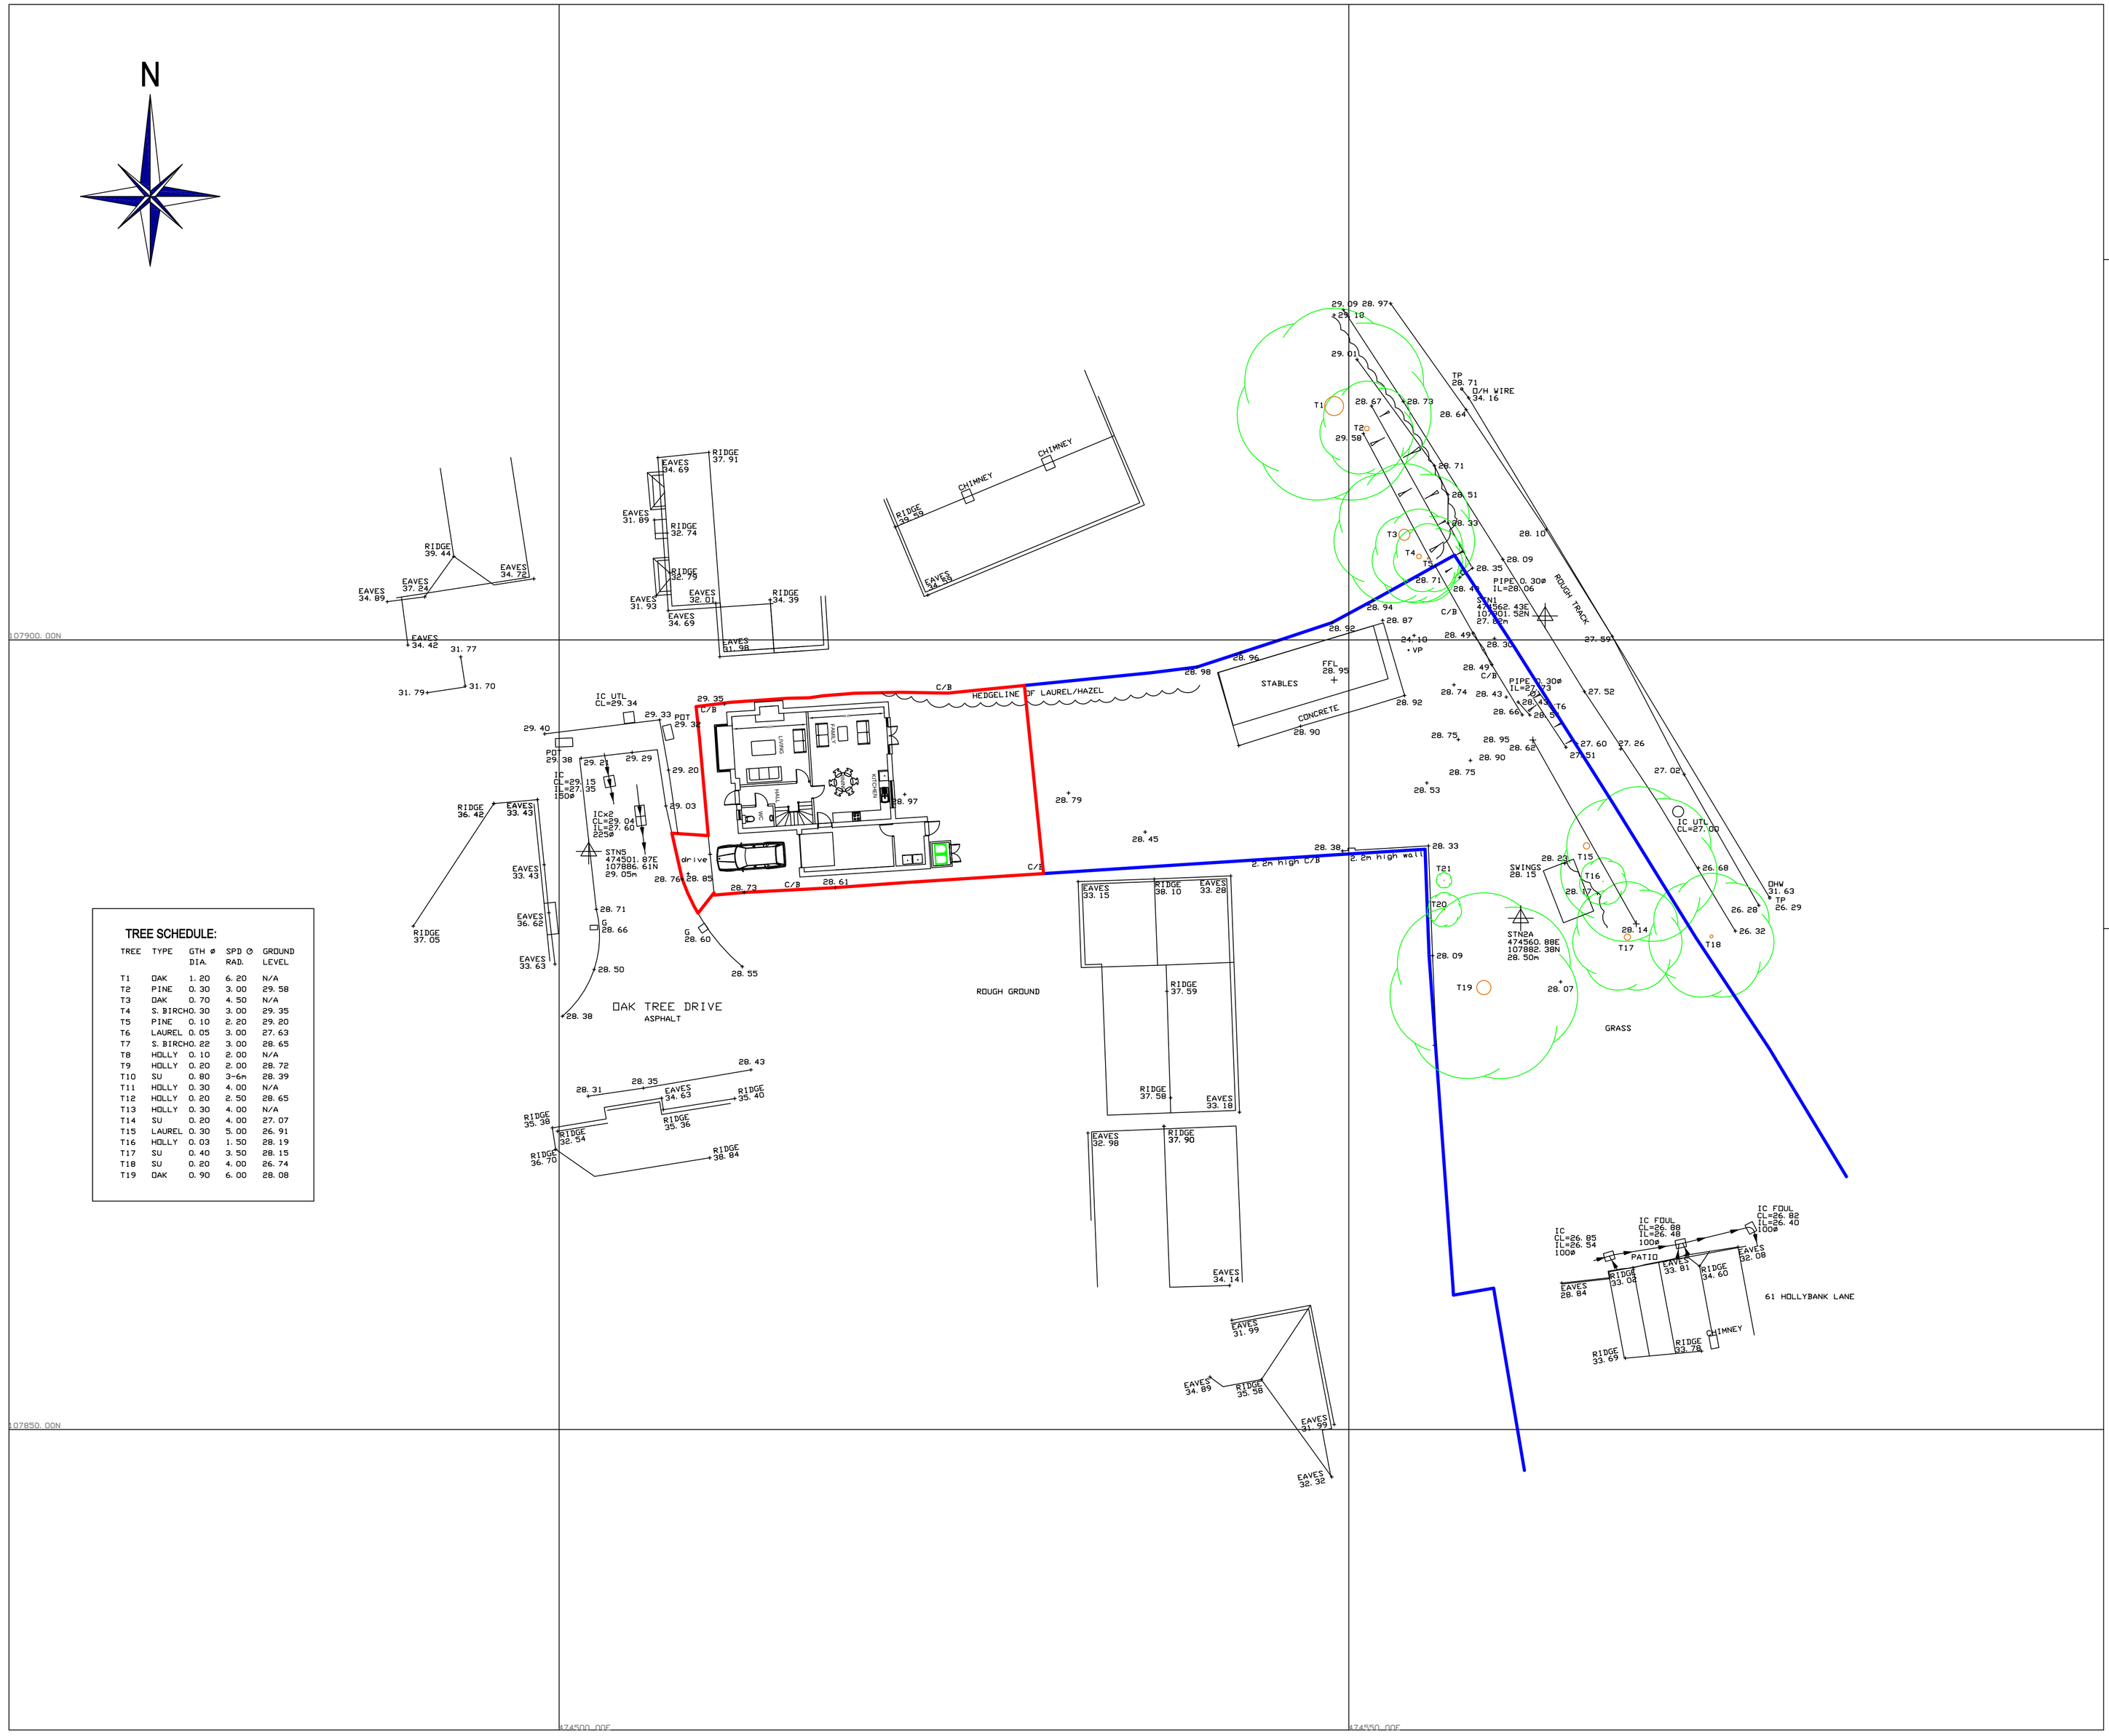


TREE SCHEDULE:

TREE	TYPE	GTH ø DIA.	SPD ⌀ RAD.	GROUND LEVEL
T1	OAK	1. 20	6. 20	N/A
T2	PINE	0. 30	3. 00	29. 58
T3	OAK	0. 70	4. 50	N/A
T4	S. BIRCH	0. 30	3. 00	29. 35
T5	PINE	0. 10	2. 20	29. 20
T6	LAUREL	0. 05	3. 00	27. 63
T7	S. BIRCH	0. 22	3. 00	28. 65
T8	HOLLY	0. 10	2. 00	N/A
T9	HOLLY	0. 20	2. 00	28. 72
T10	SU	0. 80	3-6m	28. 39
T11	HOLLY	0. 30	4. 00	N/A
T12	HOLLY	0. 20	2. 50	28. 65
T13	HOLLY	0. 30	4. 00	N/A
T14	SU	0. 20	4. 00	27. 07
T15	LAUREL	0. 30	5. 00	26. 91
T16	HOLLY	0. 03	1. 50	28. 19
T17	SU	0. 40	3. 50	28. 15
T18	SU	0. 20	4. 00	26. 74
T19	OAK	0. 90	6. 00	28. 08

NOTES :

ALL LEVELS RELATIVE TO O.S. DATUM (FROM G.P.S)
SURVEY GRID ORIENTATED TO OS NATIONAL GRID

WHILE ALL POSSIBLE EFFORT HAS BEEN MADE TO IDENTIFY SERVICES, WE ARE UNABLE TO DETAIL COVERS BURIED OR OBSCURED AT THE TIME OF SURVEY.

ALL LEVELS AND DIMENSIONS SHOULD BE CHECKED ON SITE PRIOR TO THE COMMENCEMENT OF WORKS.

TREES SHOWN IDENTIFIED TO BEST OF SURVEYORS ABILITY, SEEK CONFIRMATION IF SPECIES CRITICAL

ROOFLINE DETAIL IS INDICATIVE ONLY
ALL BUILDINGS TO THE SOUTH OF THE SITE WERE UNDER CONSTRUCTION AT TIME OF SURVEY

GPS LEVELS AND GRID ARE OBTAINED USING INDUSTRY STANDARD GUIDELINES AND CAN VARY ACCORDING TO THE QUALITY OF THE GPS NETWORK AVAILABLE. ALL GPS DETAIL IS THEREFORE RELATIVE TO THE TIME AND DATE OF SURVEY.

KEY :

BB	- BELISHA BEACON	OHW	- OVERHEAD WIRE
BIN	- LITTER BIN	O/H	- OVERHEAD
BL	- BED LEVEL	PIL	- PILLAR
BOLL	- BOLLARD	PL	- PAVEMENT LIGHT
BRW	- BRICK WALL	POT	- TELECOM
BS	- BUS STOP	R.EYE	- RODDING EYE
CATV	- CABLE TELEVISION	RS	- ROAD SIGN
CL	- COVER LEVEL	RTW	- RETAINING WALL
CONC.	- CONCRETE	RWP	- RAIN WATER PIPE
ELEC	- ELECTRIC	SAP	- SAPLING
EP	- ELECTRICITY POLE	SB	- SIGN BOARD
FB	- FLOWER BED	SL	- SILT LEVEL
FFL	- FINISHED FLOOR LEVEL	SU	- SPECIES UNKNOWN
FH	- FIRE HYDRANT	SVP	- SOIL VENT PIPE
FP	- FLAG POLE	TBM	- TEMPORARY BENCH MARK
G	- GULLY	TCB	- TELEPHONE CALL BOX
GL	- GROUND LEVEL	TF	- TOP OF FENCE
GV	- GAS VALVE	TH	- TOP OF HEDGE
HT	- HEIGHT	TL	- TRAFFIC LIGHT
IC	- INSPECTION COVER	TP	- TELEGRAPH POLE
IL	- INVERT LEVEL	TT	- TOP OF TREE
LB	- LETTER BOX	TW	- TOP OF WALL
LP	- LAMP POST	UIS	- UNDERSIDE CEILING
LT	- LIGHT	UTL	- UNABLE TO LIFT
MH	- MANHOLE	WL	- WATER LEVEL
MKR	- MARKER	WV	- WATER VALVE

FENCE TYPES :

B/W	- BARBED WIRE	I/R	- IRON RAILING
C/B	- CLOSE BOARD	P/R	- POST & RAIL
C/L	- CHAIN LINK	P/W	- POST & WIRE
C/P	- CHESTNUT PALING		

STN1 — SURVEY STATION
ANCILLARY BUILDING
SLOPE DIRECTION
EAVES +17. 02 — ROOF LEVELS
ASH G=0. 30 S=2. 00 — TREE SPECIES / GIRTH (diameter) / SPREAD (radius)

FENCE
WALL
BANK/PATH
OVERHEAD
SHRUBBERY
BUILDING
GATE
O/H WIRE
SECTION
KERB
TRACK/
DROP KERB
HIGH LVL CANOPY

DRAINAGE :

FOUL DRAINAGE
STORM (SURFACE WATER) DRAINAGE
100Ø = 100mm DIAMETER PIPE

ISO 9001 REGISTERED FIRM

0m 1 2 3 4 5 6 7 8 9 10m
SCALE BAR

Shaw Colegate
LAND & BUILDING SURVEYORS
Unit 9B, The Old Flour Mill, Queen Street, Emsworth, Hants. PO10 7BT
Tel : (01243) 371472 Email : mail@shawcolegate.com
Fax : (01243) 376940 Web : www.shawcolegate.com

Title : LAND NORTH OF 61 HOLLYBANK LANE
EMSWORTH, HAMPSHIRE PO10 7UE
PROPOSED SITING ON TOPOGRAPHIC SURVEY

Job No. : 14415_TOPO_REV_A
Original Scale : 1: 200
Sheet Size : A1 Drawing : 6

Surveyed By : SB/SO Date : SEPTEMBER 2015
Drawn By : SB/SO Date : SEPTEMBER 2015

Client: MR AND MRS HILL
61 HOLLYBANK LANE, EMSWORTH, HAMPSHIRE
PO10 7UE